



NOTES: UNLESS OTHERWISE SPECIFIED

- CONSTRUCTION:  
HOUSING & PLUNGER: MOLDED NYLON TYPE 6.6. AVAILABLE IN TEN COLORS.  
CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-553. GOLD PLATED PER MIL-G-45204.4001 0.00001" [0.000254] THICK MINIMUM.  
SPRING: STAINLESS STEEL TYPE 302.

- PERFORMANCE:  
MAXIMUM CURRENT: 6.9 AMPS WITH 76° TEMPERATURE RISE.  
MAXIMUM VOLTAGE: 2.0 KV  
MAXIMUM TEMPERATURE: 175°F (79°C)

- FEATURES:  
HOOK FITS COMPONENTS UP TO  $\phi 0.040"$  [1.01]  
FIELD SERVICEABLE.

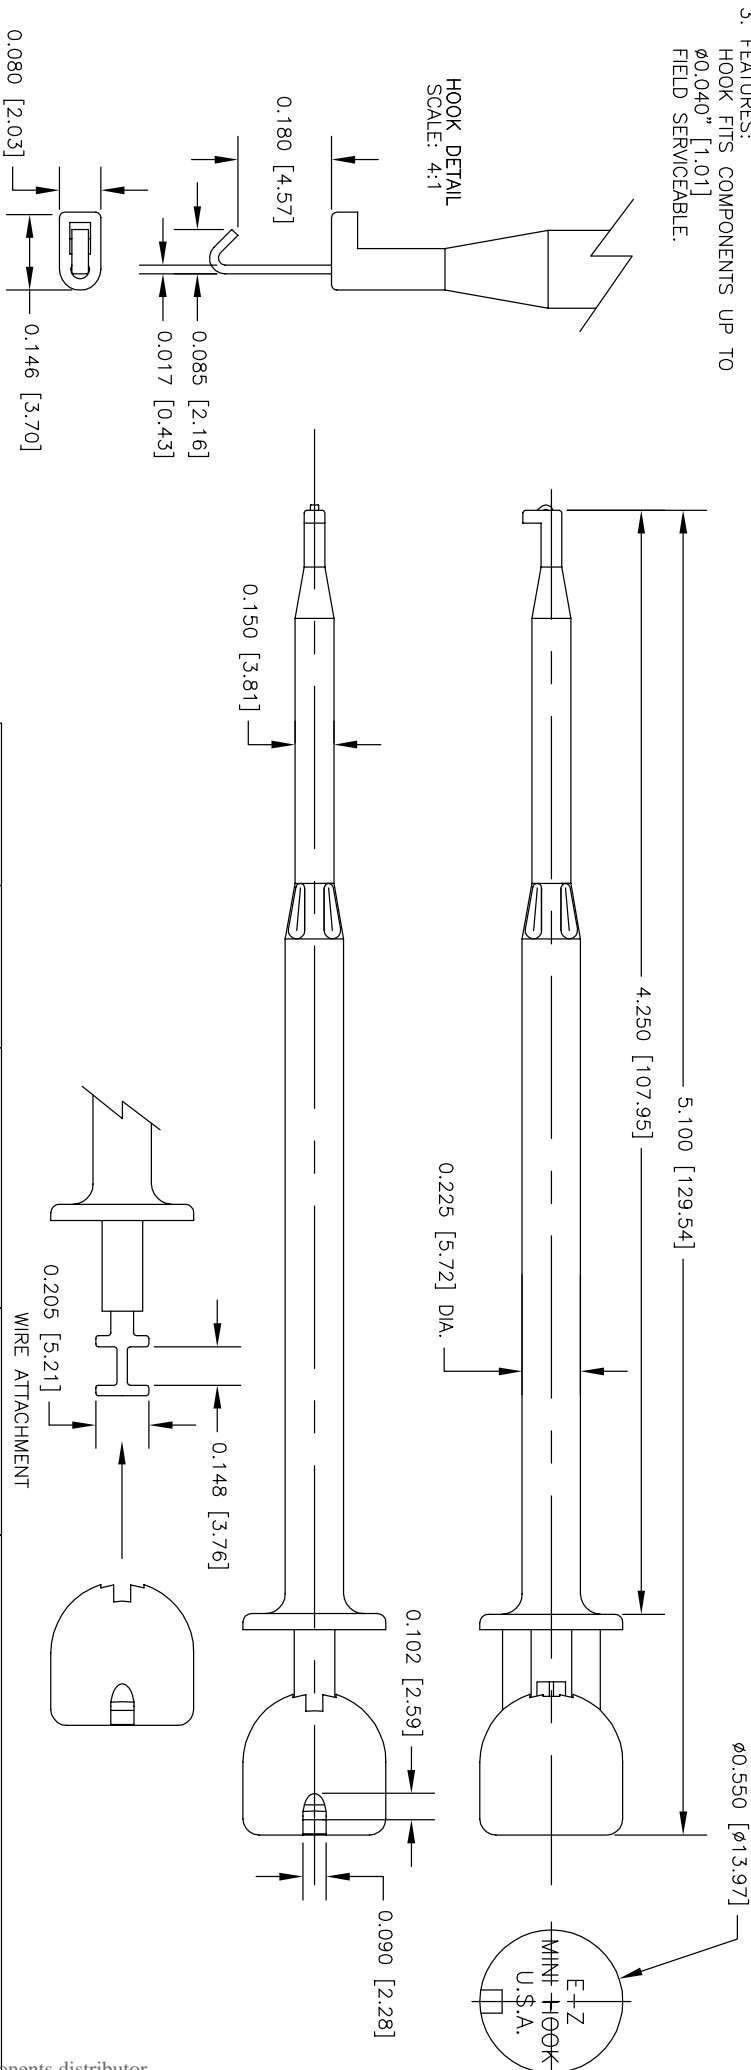

ACTUAL SIZE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS DECIMALS ANGLES .XXX ±		CONTRACT NO.		DESCRIPTION	
DRAWN R.L.		DATE	E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.		
APPROVED BY		6/09	E-Z-MINI-HOOK TEST CONNECTOR		
MATERIAL SEE NOTE.		FINISH SEE NOTE.		SIZE CODE IDENT NO. DRAWING NO.	
NEXT ASSY USED ON		DO NOT SCALE DRAWING		B 08505 XL1	
APPLICATION		SCALE		SHEET 1 OF 1	

REVISIONS		DATE	APPROVED
LTR	DESCRIPTION		

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPERTY OF EZ-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PERMISSION OF EZ-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATING IN HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATING ARE NOT TO BE USED CONCURRENTLY.