

NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
AVAILABLE IN TEN COLORS.

CONTACT BLADE: BERYLLIUM COPPER, GOLD PLATED
PER MIL-G-45204 B TYPE 1

0.00001 [0.000254] THK MINIMUM.
SPRING: STAINLESS STEEL TYPE 302.

2. PERFORMANCE:

MAXIMUM CURRENT: 4.4 AMPS WITH 76°
TEMPERATURE RISE.

MAXIMUM VOLTAGE: 2.4 KV


MAXIMUM TEMPERATURE: 200°F (93°C)

3. FEATURES:

SLIPS INTO PC BOARD TEST POINT HOLES
AND LOCK ONTO THE BOARD.

FITS HOLE $\phi 0.040$ [$\phi 1.02$] TO $\phi 0.042$ [$\phi 1.07$].
FIELD SERVICEABLE.

HOOK DETAIL
SCALE: 4:1

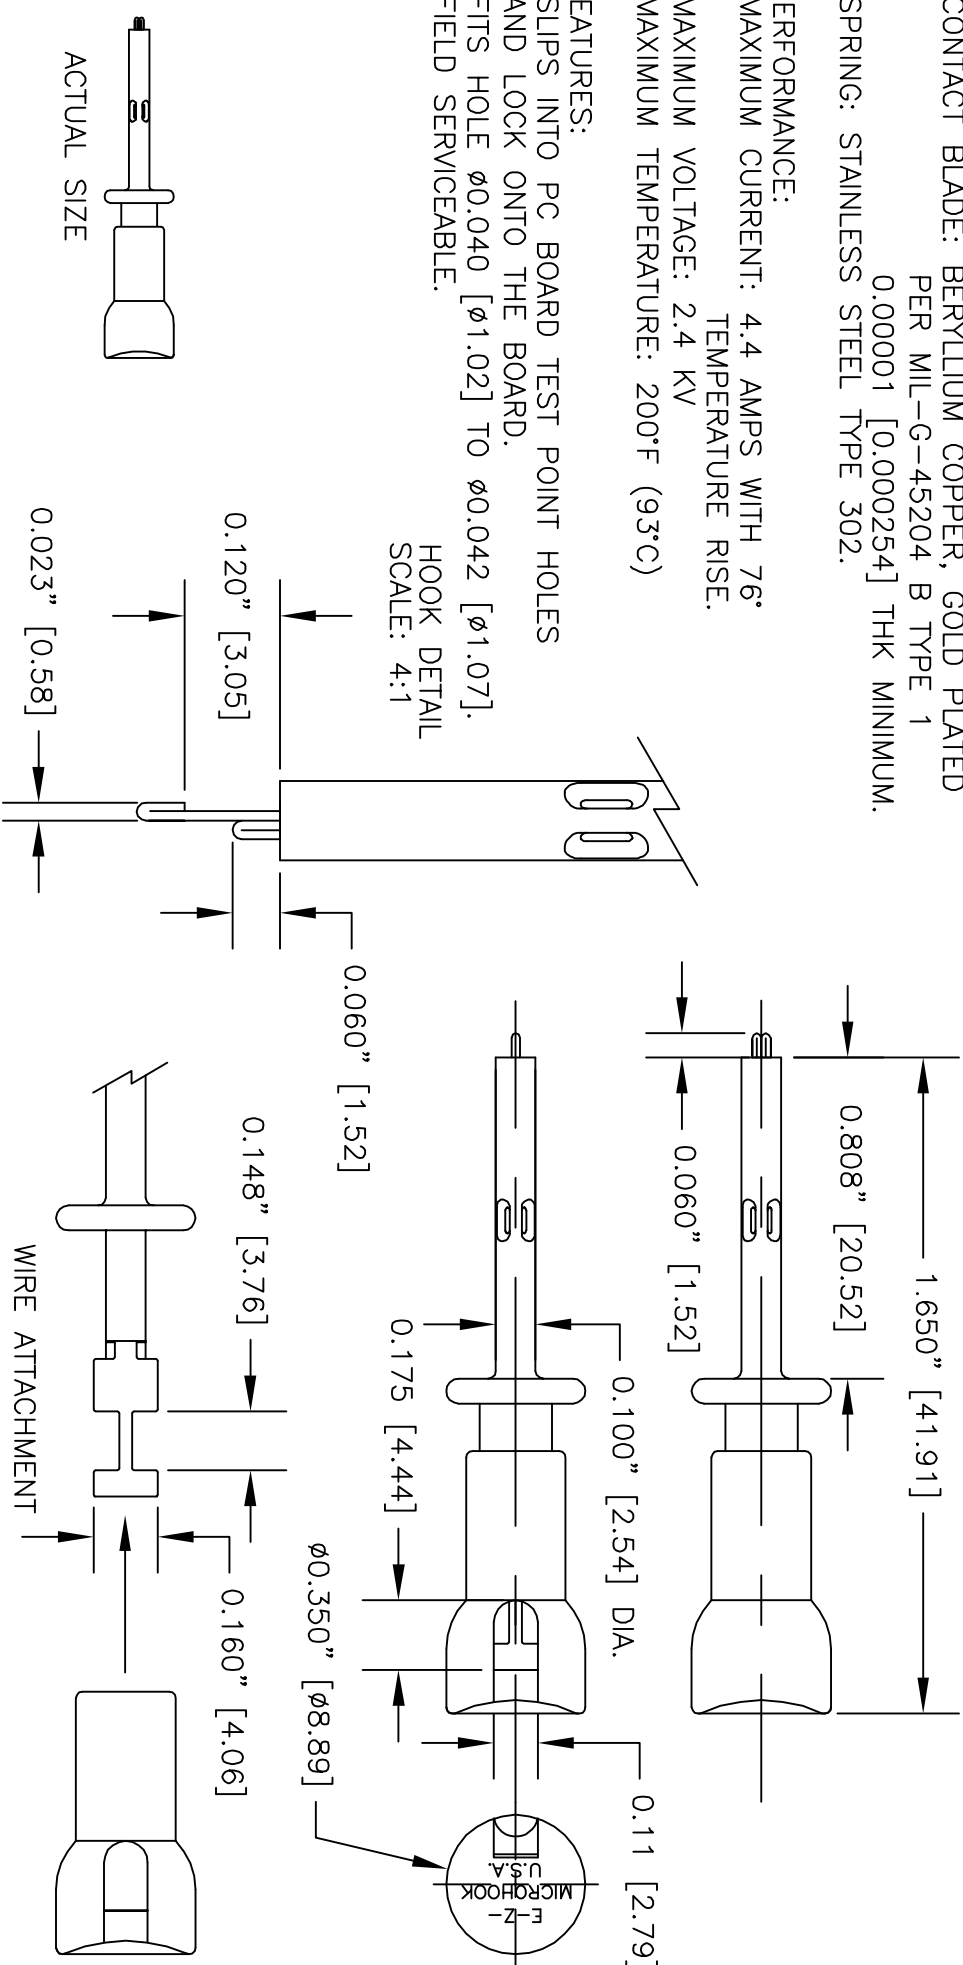

LTR	DESCRIPTION	REVISIONS	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES

± .XX ± .XXX ±

MATERIAL SEE NOTE.

FINISH SEE NOTE.

USED ON APPLICATION DO NOT SCALE DRAWING

CONTRACT NO.

APPROVALS	DATE
DRAWN R.L.	7/09
APPROVED BY	

E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.

DESCRIPTION: E-Z MICRO-LOCK HOOK CONNECTOR

SIZE	CODE IDENT NO.	DRAWING NO.	REV
A	08505	XG40CCOLOR	
SCALE	2:1	SHEET 1 OF 1	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.