

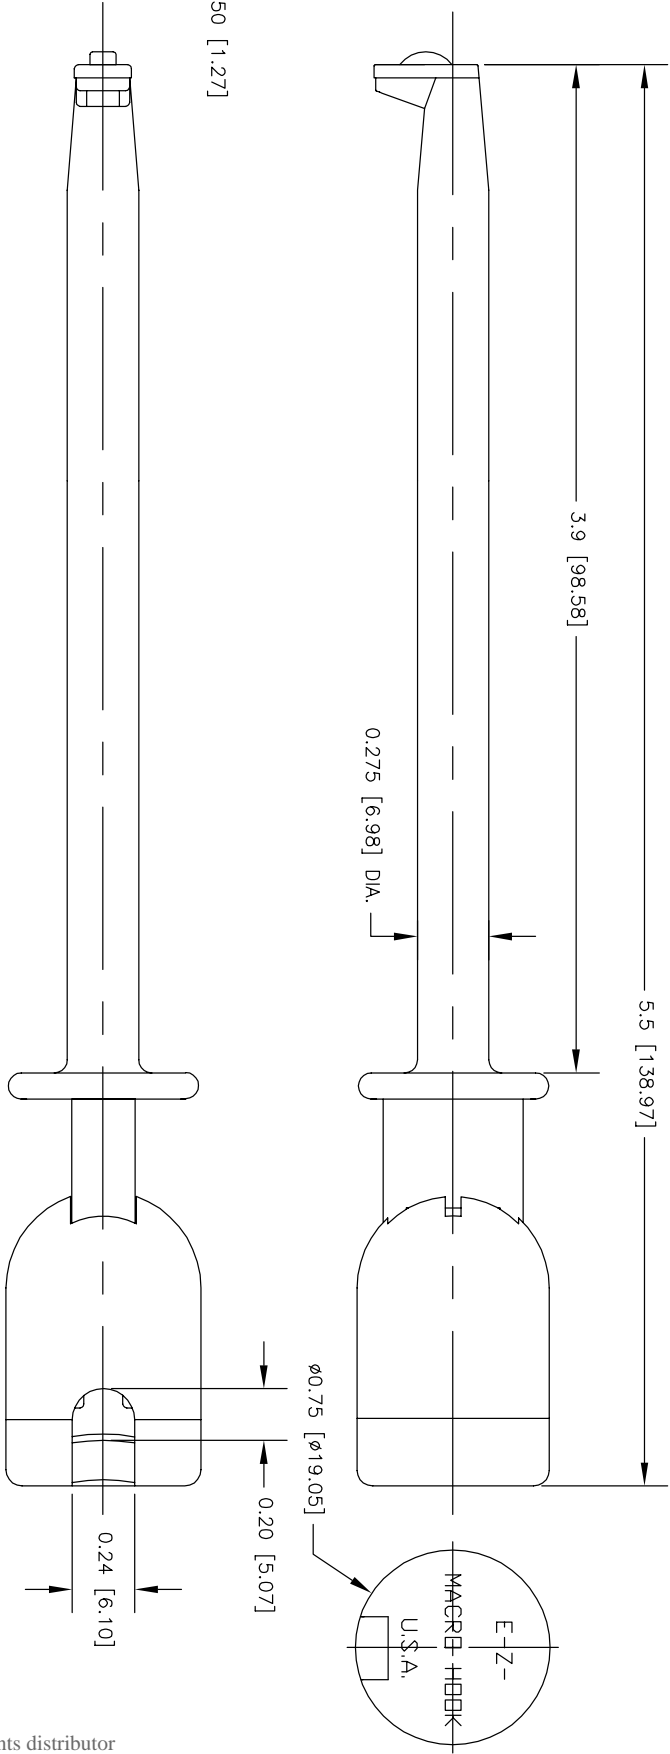



NOTES: UNLESS OTHERWISE SPECIFIED

- CONSTRUCTION:
HOUSING & PLUNGER: MOLDED NYLON TYPE 6.6. AVAILABLE IN TEN COLORS.
CONTACT BLADE: NICKEL SILVER ALLOY CA 770.
SPRING: STAINLESS STEEL TYPE 302.

- PERFORMANCE:
MAXIMUM CURRENT: 10.9 AMPS WITH A 76° TEMPERATURE RISE.
MAXIMUM VOLTAGE: 2.4 KV
MAXIMUM TEMPERATURE: 200°F (93°C)

- FEATURES:
HOOK FITS COMPONENTS UP TO $\phi 0.140"$ [3.56].
FIELD SERVICEABLE.

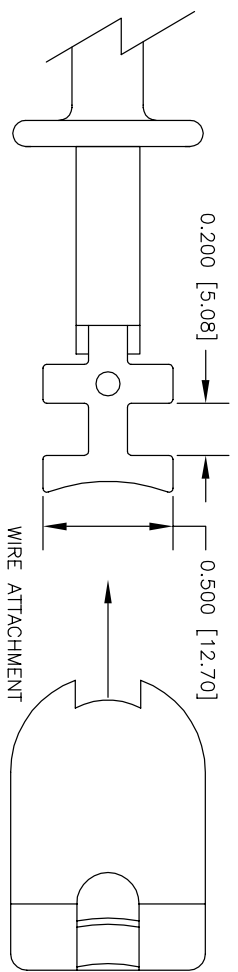

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS DECIMALS ANGLES .XXX #		CONTRACT NO.	
APPROVALS	DATE	APPROVALS	DATE
R.L.	6/09	R.L.	6/09
MATERIAL SEE NOTE.		APPROVED BY	
FINISH SEE NOTE.			
NEXT ASSY USED ON		DO NOT SCALE DRAWING	
APPLICATION			

E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.		DESCRIPTION	
E-Z-MACRO HOOK TEST CONNECTOR, LONG		SIZE	DRAWING NO.
B 08505 XHL		SCALE	SHEET 1 OF 1
2:1			

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATING IN HANDS FREE CONTROLLED ENVIRONMENT. MAXIMUM RATING IS 10.9 AMPS AT 76° TEMPERATURE RISE.