LTR	DESCRIPTION	DATE	APPROVEI

NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:
   HOUSING & PLUNGER & SLIDE: MOLDED NYLON 6,6.
   AVAILABLE IN TEN COLORS.
   CONTACT NEEDLE: STAINLESS STEEL.
   BANANA SOCKER: 360 1/2 HD. BRASS.
   COMPRESSION SPRING: STAINLESS STEEL.

2. PERFORMANCE:
   MAXIMUM CURRENT: 500 mA
   MAXIMUM VOLTAGE: 300 V
   MAXIMUM TEMPERATURE: 200°F (93°C)

2. FEATURES:
   NEEDLE PIERCES WIRE ø0.050 [ø1.27] TO ø0.150 [ø3.81].
   DOUBLE BANANA SOCKET.
   ACCEPTS SHROUDED AND UNSHROUDED BANANA PLUGS.

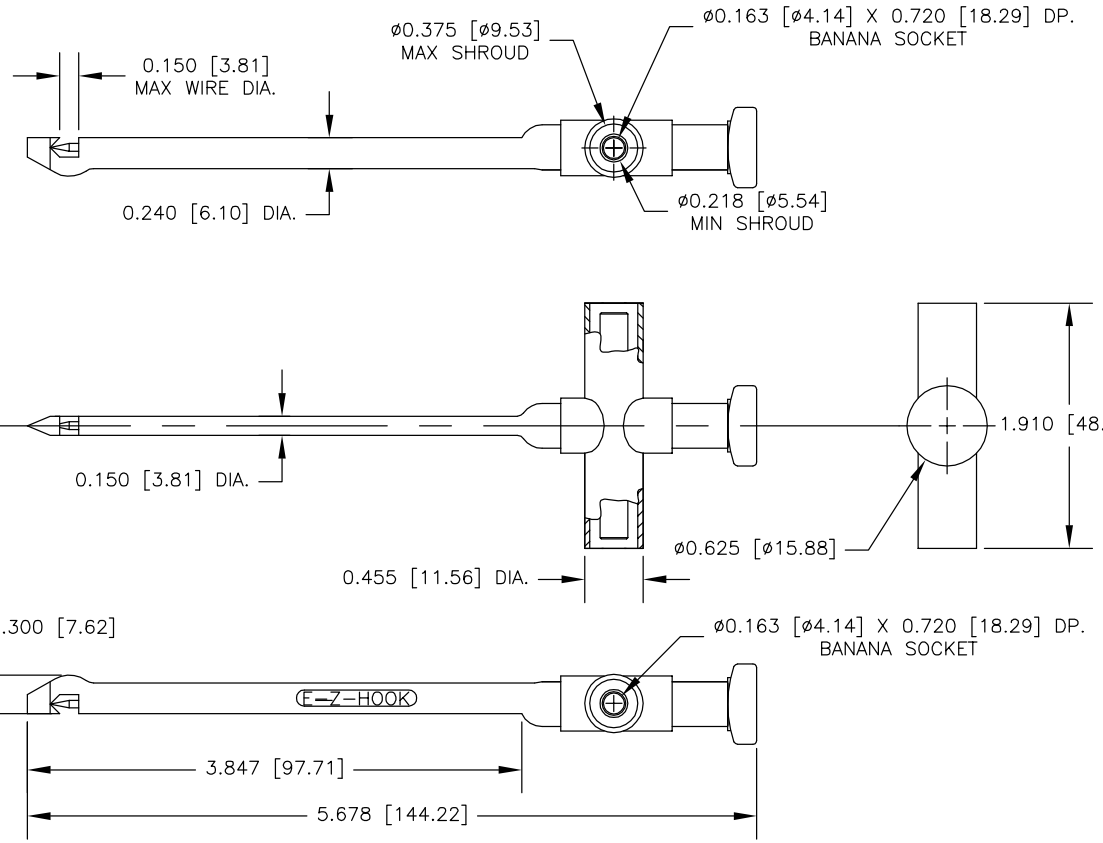

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS ± DECIMALS .XX ± .XXX ± ANGLES ±	CONTRACT NO.	
			APPROVALS	DATE
			DRAWN R.L.	6/09
		MATERIAL SEE NOTE.	APPROVED BY	
		FINISH SEE NOTE.		
NEXT ASSY	USED ON			
APPLICATION		DO NOT SCALE DRAWING		

E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.

DESCRIPTION
E-Z-MACRO HOOK
INSULATION-PIERCING

SIZE	CODE IDENT NO.	DRAWING NO.	REV
B	08505	XEL	

SCALE 1:1 SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC.
MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.

Downloaded from Elcodis.com electronic components distributor