


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9275COLOR
INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS.
ALLIGATOR: STEEL. NICKEL PLATED.

2. P/N: W-200/COLOR
22AWG 65X40 TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

3. PERFORMANCE
MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: 1000 (300 UL) W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

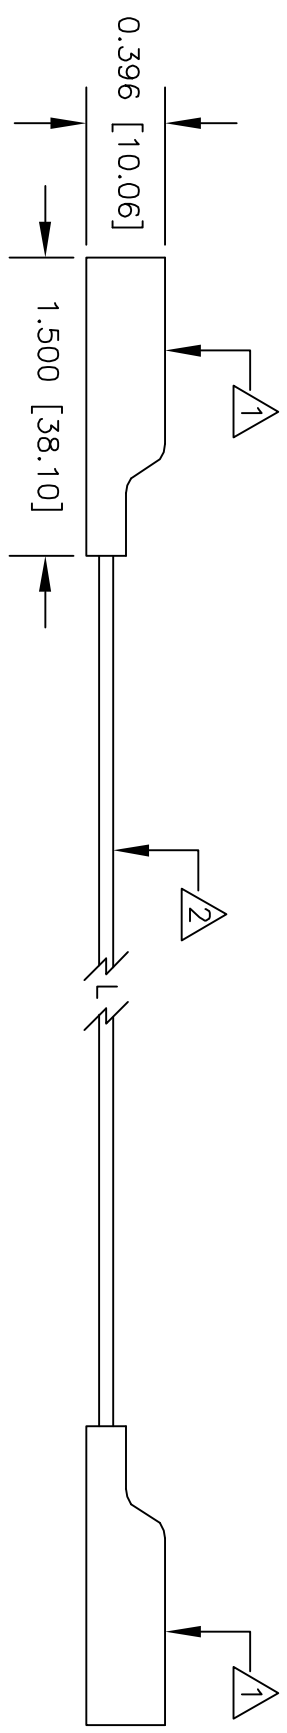

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES
	± .XX ± ± .XXX ±
	MATERIAL SEE NOTE.
	FINISH SEE NOTE.
	USED ON
	APPLICATION DO NOT SCALE DRAWING

CONTRACT NO.	
APPROVALS	DATE
DRAWN R.L.	10/10
APPROVED BY	

E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
DESCRIPTION: MINI ALLIGATOR JUMPER (9275)	
SIZE	CODE IDENT NO. DRAWING NO.
A	08505 284M
SCALE	1:1
SHEET	1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.