


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9274COLOR
INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS.
ALLIGATOR: STEEL. NICKEL PLATED.

2. P/N: W-600/COLOR
18AWG 65X36 TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

3. PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 UL W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

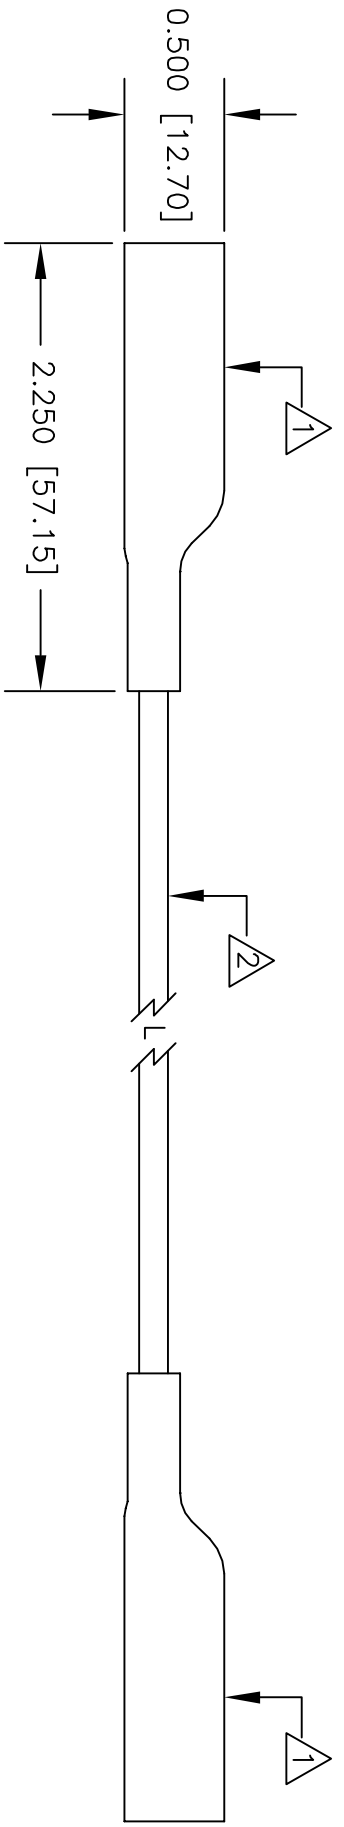

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.	
		.XX # .XXX #		APPROVALS	
		MATERIAL SEE NOTE.		DRAWN R.L. 11/10	
		FINISH SEE NOTE.		APPROVED BY	
APPLICATION USED ON					
DO NOT SCALE DRAWING					
		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.		DESCRIPTION	
				STD ALLIGATOR (9274) JUMPER	
				SIZE CODE IDENT NO. DRAWING NO.	
		A 08505 684		SCALE 1:1	
				SHEET 1 OF 1	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.