


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9274COLOR  
INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS.  
ALLIGATOR: STEEL. NICKEL PLATED.

2. P/N: 9260COLOR  
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.  
FRAME: BRASS. NICKEL PLATED.  
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.

3. P/N: W-600/COLOR  
18AWG 65X36 TINNED COPPER  
0.144 [3.66] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.

4. PERFORMANCE  
MAXIMUM CURRENT: 4.0 AMPS  
MAXIMUM VOLTAGE: 5000 UL W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

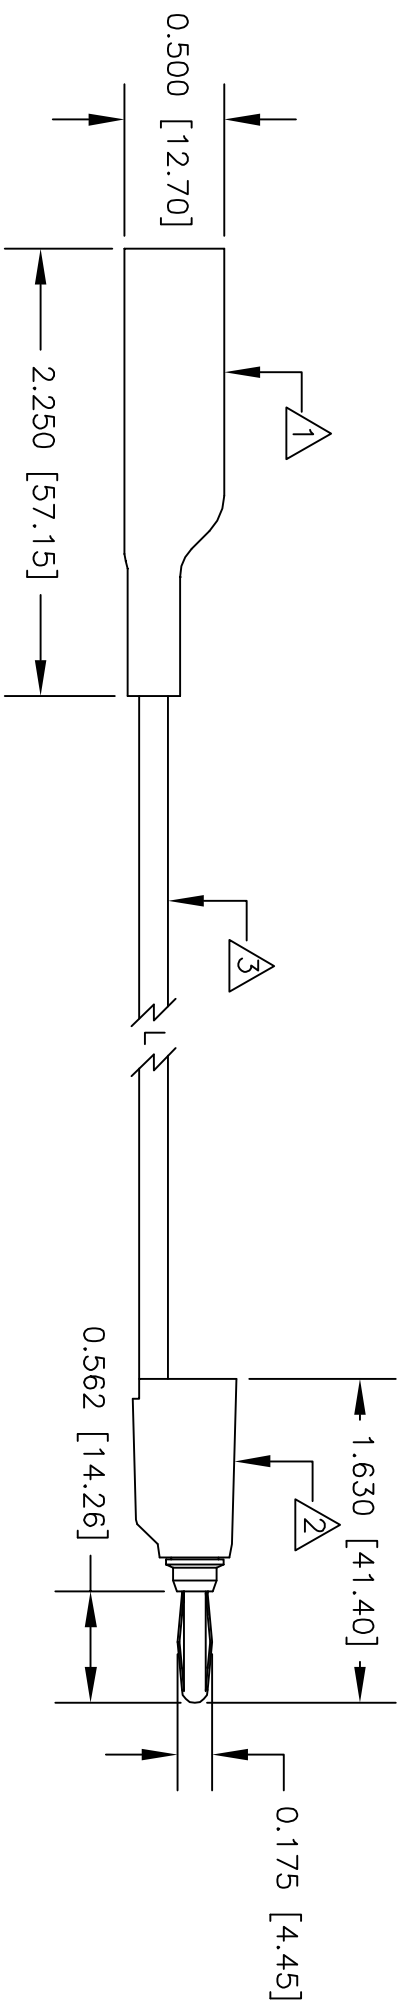

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.	
± .XX ±	± .XXX ±	APPROVALS	DATE
MATERIAL SEE NOTE.		DRAWN	R.L. 11/10
FINISH SEE NOTE.		APPROVED BY	
APPLICATION USED ON		DESCRIPTION	
DO NOT SCALE DRAWING		<p><b>EZ-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.</p> <p>STD ALLIGATOR (9274) TO STK BAN PLUG (9260)</p>	
SIZE	CODE	IDENT NO.	DRAWING NO.
A	08505	681	
SCALE	1:1		SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO EZ-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF EZ-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.