


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9205-HS  
INSULATOR: HEAT SHRINK TUBING 221. BLACK.  
BODY: BRASS. 40μ [1.02μm] MIN GOLD OVER NICKEL PLATED.  
CONTACT: BeCu OR PHOSPHOR BRONZE. 40μ [1.02μm] MIN GOLD OVER NICKEL PLATED.
2. P/N: 92274COLOR  
INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS.  
ALLIGATOR: STEEL. NICKEL PLATED.
3. P/N: W-200/COLOR  
22AWG 65X40 TINNED COPPER  
0.070 [1.78] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.
4. PERFORMANCE  
MAXIMUM CURRENT: 2.5 AMPS  
MAXIMUM VOLTAGE: 1000 (300 UL) W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

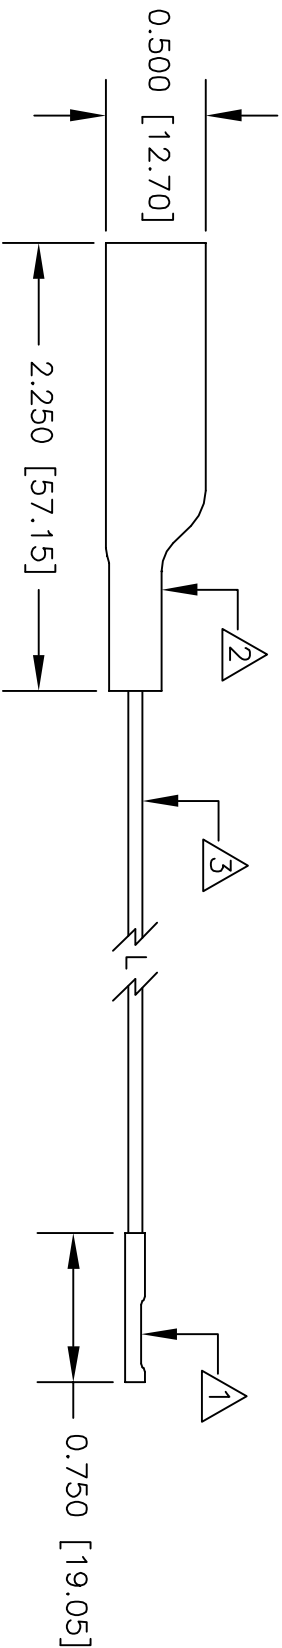

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.		DESCRIPTION	
±	.XX ±	±		APPROVALS	DATE
±	.XXX ±	±		DRAWN	
MATERIAL SEE NOTE.				APPROVED BY	
FINISH SEE NOTE.					
USED ON					
APPLICATION		DO NOT SCALE DRAWING			

**E-Z-HOOK** DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.

DESCRIPTION  
0.025 [0.64] SQ. SOCKET TO STD ALLIGATOR (92274)

SIZE CODE IDENT NO. DRAWING NO.  
A 08505 9172

SCALE 1:1 SHEET 1 OF 1