

TECHNICAL CHARACTERISTICS

MATERIAL
 CONTACT MATERIAL: COPPER ALLOY
 CONTACT TYPE: STAMPED
 CONTACT PLATING: TIN
 QUALITY CLASS: 25 MATING CYCLES
 PITCH: 2.54MM

ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 125°C
 COMPLIANCE: LEAD FREE AND ROHS



ELECTRICAL
 CURRENT RATING: 3A
 WORKING VOLTAGE: 250V AC
 CONTACT RESISTANCE: 20 mOHM MAX

WIRE DIMENSION
 AWG: AWG 22 - 28

PACKAGING
 10KPCS REEL

RoHS Compliant							
G				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15		DESCRIPTION: 2.54MM FEMALE CRIMP CONTACT
F							
E	06-AUG-10	DIMENSION	GG	APPROVAL: RJ	UNIT: MM SCALE: SHEET: 1/1 DRAW: PEARL	WERI PART NO: 61900113722	SIZE
D	09-AUG-08	T&R DESCRIPTION	RB				A4
C	30-JAN-07	DRAW	EC				
B	01-APR-04	LEAD FREE	JP				
A	01-JUL-99	PDF	JP				
REV	DATE	FILE	BY				

1	2	3	4	5
---	---	---	---	---

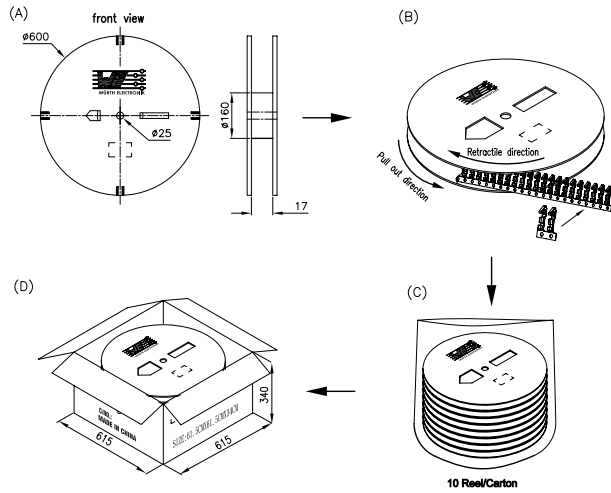

Note :

1. All dimensions meet EIA-481-3 requirements.
2. Material : WH Conductive polystyrene Alloy.
3. Thickness : 0.50±0.05mm.
4. Component load per reel : 10000 pcs.
5. Reel size : diameters 160*25, T=17.
6. Reel chipboard size : diameters 600*25, T=7.
7. Bag size : 900*900*0.06.
8. Carton size : 615*615*340.

Q'tY/Reel	Reel/Carton	Q'tY/Carton
10Kpcs	10	100Kpcs

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15		DESCRIPTION: 2.54MM FEMALE CRIMP CONTACT	SIZE
G								A4
F								
E								
D								
C				APPROVAL:	UNIT: MM	WERI PART NO: 6190 01 13722		D
B					SCALE:			
A					SHEET: 2/2			
REV	DATE	FILE	BY		DRAW: PEARL			