


D-Sub

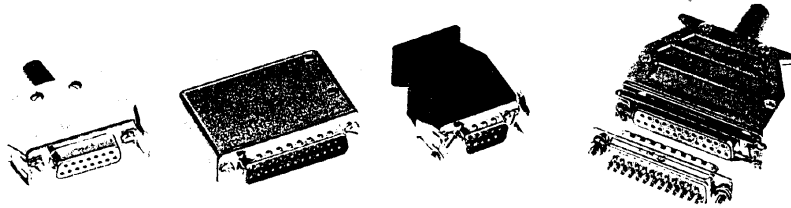

Hoods for spring or slide locking and accessories

Identification	No. of contacts	Part No.		Drawing	Dimensions in mm																																																
Hood top cable entry		Thermoplastic grey RAL 7032	Thermoplastic metallized		<table border="1"> <thead> <tr> <th></th> <th>a</th> <th>b₁</th> <th>b₂</th> <th>c</th> <th>d</th> <th>e_{min}</th> <th>e_{max}</th> </tr> </thead> <tbody> <tr> <td>9</td> <td>31</td> <td>23</td> <td>28</td> <td>12.8</td> <td>10</td> <td>5.75</td> <td>9</td> </tr> <tr> <td>15</td> <td>39.4</td> <td>28</td> <td>28</td> <td>12.8</td> <td>10</td> <td>5.75</td> <td>9</td> </tr> <tr> <td>25</td> <td>53.3</td> <td>34</td> <td>34</td> <td>12.8</td> <td>14</td> <td>5.75</td> <td>9</td> </tr> <tr> <td>37</td> <td>69.7</td> <td>43</td> <td>43</td> <td>12.8</td> <td>20</td> <td>5.75</td> <td>9</td> </tr> <tr> <td>50</td> <td>87.1</td> <td>41</td> <td>41</td> <td>15.8</td> <td>20</td> <td>5.75</td> <td>11.6</td> </tr> </tbody> </table>		a	b ₁	b ₂	c	d	e _{min}	e _{max}	9	31	23	28	12.8	10	5.75	9	15	39.4	28	28	12.8	10	5.75	9	25	53.3	34	34	12.8	14	5.75	9	37	69.7	43	43	12.8	20	5.75	9	50	87.1	41	41	15.8	20	5.75	11.6
		a	b ₁			b ₂	c	d	e _{min}	e _{max}																																											
	9	31	23			28	12.8	10	5.75	9																																											
	15	39.4	28			28	12.8	10	5.75	9																																											
	25	53.3	34			34	12.8	14	5.75	9																																											
37	69.7	43	43	12.8	20	5.75	9																																														
50	87.1	41	41	15.8	20	5.75	11.6																																														
9	09 67 009 0411	09 67 009 0413																																																			
15	09 67 015 0411	09 67 015 0413																																																			
25	09 67 025 0411	09 67 025 0413																																																			
37	09 67 037 0411	09 67 037 0413																																																			
50	09 67 050 0411	09 67 050 0413																																																			
Hood side cable entry		Thermoplastic grey RAL 7032	Thermoplastic metallized																																																		
	9	09 67 009 0511	09 67 009 0513																																																		
	15	09 67 015 0511	09 67 015 0513																																																		
	25	09 67 025 0511	09 67 025 0513																																																		
	37	09 67 037 0511	09 67 037 0513																																																		
50	09 67 050 0511	09 67 050 0513																																																			
Hood top and side ¹⁾ cable entry		Thermoplastic black	Thermoplastic metallized		<table border="1"> <thead> <tr> <th></th> <th>a</th> <th>c</th> <th>d</th> <th>e_{min}</th> <th>e_{max}</th> </tr> </thead> <tbody> <tr> <td>9</td> <td>31</td> <td>15.4</td> <td>7</td> <td>1.7</td> <td>7.5</td> </tr> <tr> <td>15</td> <td>39.4</td> <td>15.4</td> <td>7</td> <td>1.7</td> <td>8</td> </tr> <tr> <td>25</td> <td>53.2</td> <td>15.4</td> <td>9</td> <td>1.5</td> <td>8</td> </tr> <tr> <td>37</td> <td>69.5</td> <td>15.4</td> <td>9</td> <td>1.5</td> <td>8</td> </tr> <tr> <td>50</td> <td>87</td> <td>17.9</td> <td>9</td> <td>1.5</td> <td>8</td> </tr> </tbody> </table>		a	c	d	e _{min}	e _{max}	9	31	15.4	7	1.7	7.5	15	39.4	15.4	7	1.7	8	25	53.2	15.4	9	1.5	8	37	69.5	15.4	9	1.5	8	50	87	17.9	9	1.5	8												
		a	c			d	e _{min}	e _{max}																																													
	9	31	15.4			7	1.7	7.5																																													
	15	39.4	15.4			7	1.7	8																																													
	25	53.2	15.4			9	1.5	8																																													
37	69.5	15.4	9	1.5	8																																																
50	87	17.9	9	1.5	8																																																
9	09 67 009 0452	09 67 009 0453																																																			
15	09 67 015 0452	09 67 015 0453																																																			
25	09 67 025 0452	09 67 025 0453																																																			
37	09 67 037 0452	09 67 037 0453																																																			
50	09 67 050 0452	09 67 050 0453																																																			
Spring latch	9-50	corrosion resistant steel 09 67 000 9907 ²⁾																																																			
Fixed latch	9-37 50	corrosion resistant steel 09 67 001 9971 ²⁾ 09 67 001 9972 ²⁾																																																			
Slide locking device	9 15 25 37 50	corrosion resistant steel 09 67 000 9914 09 67 000 9915 09 67 000 9916 09 67 000 9917 09 67 000 9918			<table border="1"> <thead> <tr> <th></th> <th>a</th> <th>b</th> <th>c</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>9</td> <td>35.6</td> <td>25</td> <td>12</td> <td>10</td> </tr> <tr> <td>15</td> <td>44</td> <td>33.3</td> <td>12</td> <td>10</td> </tr> <tr> <td>25</td> <td>57.8</td> <td>47</td> <td>12</td> <td>10</td> </tr> <tr> <td>37</td> <td>74.3</td> <td>63.5</td> <td>12</td> <td>10</td> </tr> <tr> <td>50</td> <td>72</td> <td>61.1</td> <td>14.8</td> <td>13.5</td> </tr> </tbody> </table>		a	b	c	d	9	35.6	25	12	10	15	44	33.3	12	10	25	57.8	47	12	10	37	74.3	63.5	12	10	50	72	61.1	14.8	13.5																		
	a	b	c	d																																																	
9	35.6	25	12	10																																																	
15	44	33.3	12	10																																																	
25	57.8	47	12	10																																																	
37	74.3	63.5	12	10																																																	
50	72	61.1	14.8	13.5																																																	
Locking bolt	9-50	tinned 09 67 001 9973 ²⁾			<table border="1"> <thead> <tr> <th></th> <th>a</th> <th>b</th> <th>c</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>9</td> <td>35.6</td> <td>25</td> <td>12</td> <td>10</td> </tr> <tr> <td>15</td> <td>44</td> <td>33.3</td> <td>12</td> <td>10</td> </tr> <tr> <td>25</td> <td>57.8</td> <td>47</td> <td>12</td> <td>10</td> </tr> <tr> <td>37</td> <td>74.3</td> <td>63.5</td> <td>12</td> <td>10</td> </tr> <tr> <td>50</td> <td>72</td> <td>61.1</td> <td>14.8</td> <td>13.5</td> </tr> </tbody> </table>		a	b	c	d	9	35.6	25	12	10	15	44	33.3	12	10	25	57.8	47	12	10	37	74.3	63.5	12	10	50	72	61.1	14.8	13.5																		
	a	b	c	d																																																	
9	35.6	25	12	10																																																	
15	44	33.3	12	10																																																	
25	57.8	47	12	10																																																	
37	74.3	63.5	12	10																																																	
50	72	61.1	14.8	13.5																																																	

¹⁾ 9 poles is only side