




DIMENSIONS


DS(R)

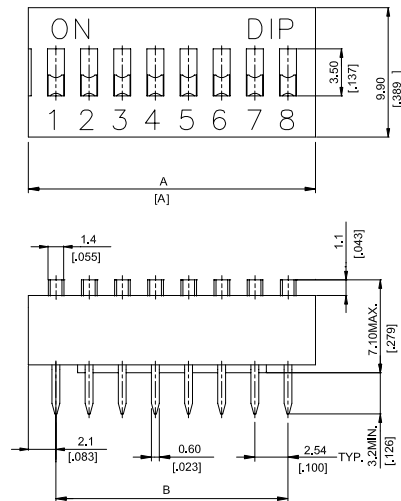


P.C.B. LAYOUT





DS SERIES

DS-12 DSR-12	12	31.84[1.254]	27.94[1.100]
DS-10 DSR-10	10	26.76[1.054]	22.86[.900]
DS-09 DSR-09	9	24.22[.954]	20.32[.800]
DS-08 DSR-08	8	21.68[.854]	17.78[.700]
DS-07 DSR-07	7	19.14[.754]	15.24[.600]
DS-06 DSR-06	6	16.60[.654]	12.70[.500]
DS-05 DSR-05	5	14.06[.554]	10.16[.400]
DS-04 DSR-04	4	11.52[.454]	7.62[.300]
DS-03 DSR-03	3	8.98[.354]	5.08[.200]
DS-02 DSR-02	2	6.44[.254]	2.54[.100]
PROD. NO.	NO. OF POS.	DIM. A	DIM. B
SCHEMATIC(TYP.)			
 (2,3,4,5,6,7,8,9,10,12, POS AVAIL)			





DSR SERIES

DA

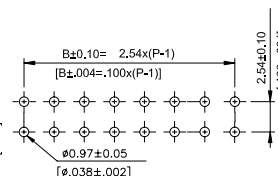
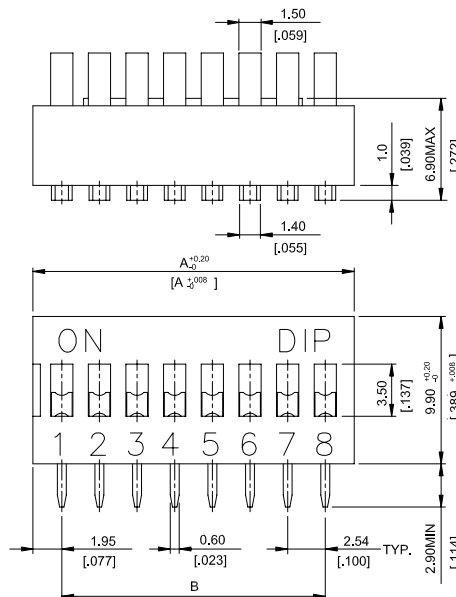


P.C.B. LAYOUT


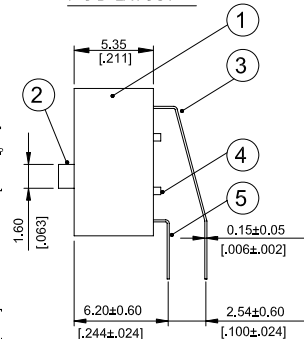


DA-12	12	31.84[1.254]	27.94[1.100]
DA-10	10	26.76[1.054]	22.86[.900]
DA-09	9	24.22[.954]	20.32[.800]
DA-08	8	21.68[.854]	17.78[.700]
DA-07	7	19.14[.754]	15.24[.600]
DA-06	6	16.60[.654]	12.70[.500]
DA-05	5	14.06[.554]	10.16[.400]
DA-04	4	11.52[.454]	7.62[.300]
DA-03	3	8.98[.354]	5.08[.200]
DA-02	2	6.44[.254]	2.54[.100]
PROD. NO.	NO. OF POS.	DIM. A	DIM. B
SCHEMATIC(TYP.)			
 (2,3,4,5,6,7,8,9,10,12, POS AVAIL)			

DP(L)

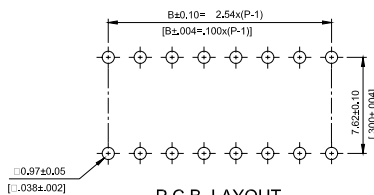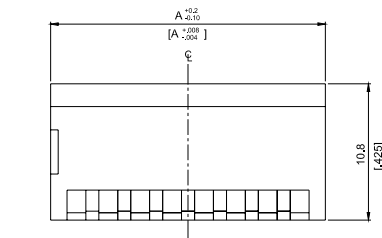

P.C.B. LAYOUT

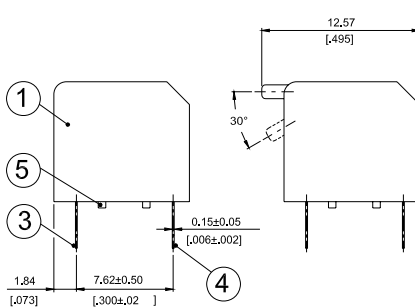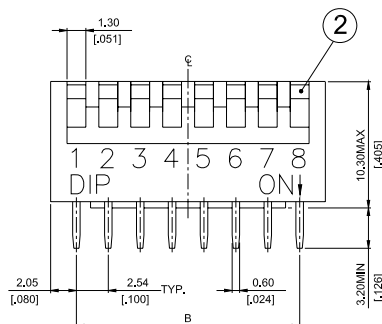


DP SERIES

DPL SERIES

DP-12	12	32.04[1.261]	27.94[1.100]
DPL-12	12	32.04[1.261]	27.94[1.100]
DP-10	10	26.96[1.061]	22.86[.900]
DPL-10	10	26.96[1.061]	22.86[.900]
DP-09	9	24.42[.961]	20.32[.800]
DPL-09	9	24.42[.961]	20.32[.800]
DP-08	8	21.88[.861]	17.78[.700]
DPL-08	8	21.88[.861]	17.78[.700]
DP-07	7	19.34[.761]	15.24[.600]
DPL-07	7	19.34[.761]	15.24[.600]
DP-06	6	16.80[.661]	12.70[.500]
DPL-06	6	16.80[.661]	12.70[.500]
DP-05	5	14.26[.561]	10.16[.400]
DPL-05	5	14.26[.561]	10.16[.400]
DP-04	4	11.72[.461]	7.62[.300]
DPL-04	4	11.72[.461]	7.62[.300]
DP-03	3	9.18[.361]	5.08[.200]
DPL-03	3	9.18[.361]	5.08[.200]
DP-02	2	6.64[.261]	2.54[.100]
DPL-02	2	6.64[.261]	2.54[.100]
PROD.	NO.	NO. OF POS.	DIM. A
			DIM. B

SCHEMATIC(TYP.)



HOW TO ORDER

□ □ □ - □ □ □ □ - □ - □ - □

Package Style:

□ = Tube

Soldering:

V = Lead Free Solderable

Seal:

□ = Regular

T = Top Tape Sealed

▲ On/Off Position

□ = Push Down On

U = Push Down Off

<▲ U Only For DP(L) >

Color Of Cover

□ = Red

▲ B = Blue

▲ K = Black

<▲ Subject to our final confirmation>

Number Of Positions:

02 = 2 Positions 07 = 7 Positions

03 = 3 Positions 08 = 8 Positions

04 = 4 Positions 09 = 9 Positions

05 = 5 Positions 10 = 10 Positions

06 = 6 Positions 12 = 12 Positions

DS

□ = Raised Actuator

R = Recessed Actuator

DA

□ = Raised Actuator

DP

□ = Short Key

L = Long Key

DS = Slide Type Dip Switch

DA = Right Angle Type Dip Switch

DP = Piano Type Dip Switch

SPECIFICATION

△MECHANICAL

Mechanical Life: 2,000 operations per switch.
Operation Force: 400gf max. (DP Series)
1,000gf max. (DS & DA Series)

Stroke: 2.0mm

Operation Temperature: -20℃ to +70℃

Storage Temperature: -40℃ to +85℃

△ELECTRICAL

Electrical Life: 2,000 operations per switch 24VDC, 25mA

Non-Switching Rating: 100mA , 50VDC

Switching Rating: 25mA , 24VDC

Contact Resistance: 50mΩ max. at initial

Insulation Resistance: {at 500 VDC} 100MΩ min.

Dielectric Strength: 500VAC / 1 minute

Circuit: SPST

MATERIALS

△BASE: UL94V-0 PBT Thermoplastic

Color: Black

△COVER UL94V-0 PBT Thermoplastic

Color: Red, Black, Blue

△ACTUATOR: UL94V-0 PBT High Thermoplastic

Color: White

△CONTACT: Phosphor bronze with gold plating over nickel

△TOP SEAL: Polyester Film

△POTTING MATERIAL: Epoxy

SOLDERING PROCESS

△Keep all switch contacts in their “OFF” position for all operations.

△WAVE SOLDERING: Recommended temperature at 500°F (260℃) max. 5 seconds for through hole type.

△HAND SOLDERING: Use a soldering iron of 30 watts, controlled at 350℃ approximately max 5 seconds.



△Make sure switch is in “OFF” position during soldering process, or it will decrease the operating force and meanwhile increase the contact resistance.

△Do not wash the switch body except top tape sealed type, which suitable for spray cleaning method from top of the s/w.



PACKING

Part Number	Number Per Tube	Part Number	Number Per Tube
DS(R)-02	72	DS(R)-02-T	70
DS(R)-03	51	DS(R)-03-T	50
DS(R)-04	40	DS(R)-04-T	39
DS(R)-05	32	DS(R)-05-T	32
DS(R)-06	27	DS(R)-06-T	28
DS(R)-07	24	DS(R)-07-T	24
DS(R)-08	21	DS(R)-08-T	21
DS(R)-09	19	DS(R)-09-T	19
DS(R)-10	17	DS(R)-10-T	17
DS(R)-12	14	DS(R)-12-T	14
DP(L)-02	70	DP(L)-02-T	65
DP(L)-03	50	DP(L)-03-T	49
DP(L)-04	39	DP(L)-04-T	39
DP(L)-05	32	DP(L)-05-T	32
DP(L)-06	27	DP(L)-06-T	27
DP(L)-07	24	DP(L)-07-T	24
DP(L)-08	21	DP(L)-08-T	21
DP(L)-09	19	DP(L)-09-T	19
DP(L)-10	17	DP(L)-10-T	17
DP(L)-12	14	DP(L)-12-T	14
DA-02	73	DA-02-T	70
DA-03	52	DA-03-T	50
DA-04	40	DA-04-T	39
DA-05	33	DA-05-T	32
DA-06	28	DA-06-T	28
DA-07	24	DA-07-T	24
DA-08	21	DA-08-T	21
DA-09	19	DA-09-T	19
DA-10	17	DA-10-T	17
DA-12	14	DA-12-T	14



DS(R)

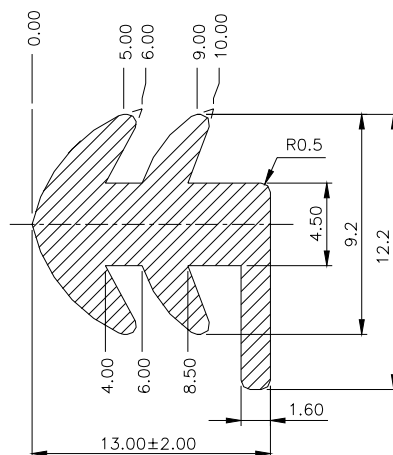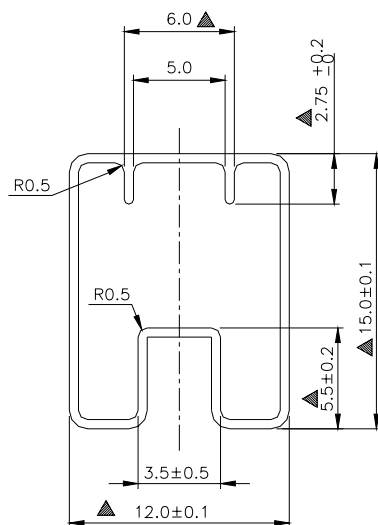

DP(L)

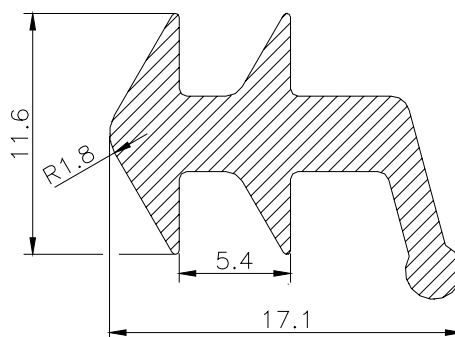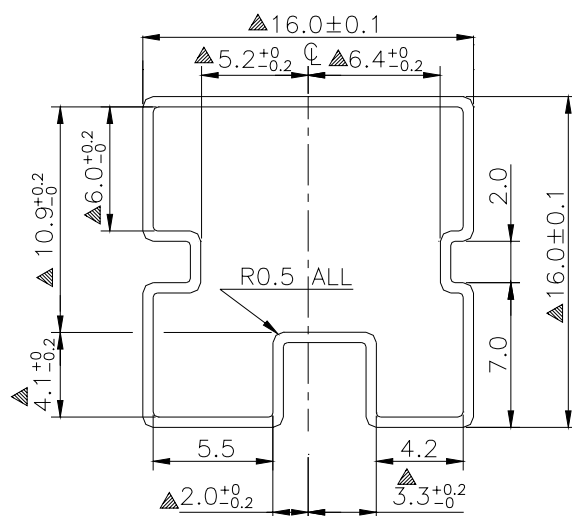

DA

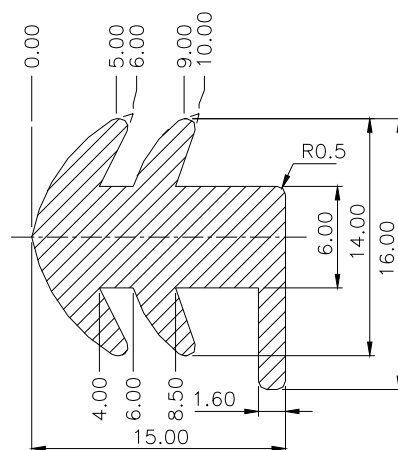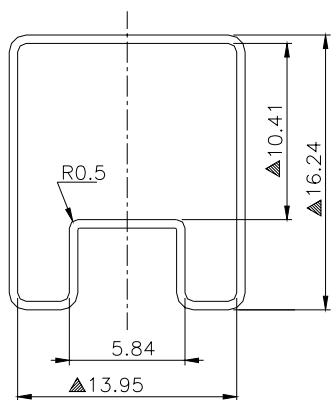



Test Report

No. 2027702/EC

Date : Jul 18 2005

Page 1 of 3

MULTICOMP PRODUCTS MANUFACTURED BY
DIPTRONICS MANUFACTURING INC
NO.110, WUGONG 3RD RD., WUGU SHIANG,
TAIPEI COUNTRY 248, TAIWAN

Report on the submitted sample said to be SPST SLIDE / PIANO / RIGHT ANGLE DIL TYPE SWITCH.

SGS Job No. : 1797722
Part Description : DA, DS & DP series
Buyer : PREMIER FARNELL ASIA PTE LTD
Supplier : DIPTRONICS MANUFACTURING INC
Sample Receiving Date : JUN 21 2005
Testing Period : JUN 22 – JUL 02 2005

Test Requested : With reference to RoHS Directive 2002/95/EC
1) To determine the Cadmium Content in the submitted sample.
2) To determine the Lead Content on the submitted sample.
3) To determine the Mercury Content on the submitted sample.
4) To determine the Hexavalent Chromium Content on the submitted sample.
5) To determine the Cadmium, Lead and Mercury content in the submitted metal sample.
6) Determination of PBBs (Polybrominated biphenyls), PBDEs (Polybrominated diphenylethers) of the submitted sample.

Test Method : 1) As specified in BS EN 1122:2001, Method B, analysis was performed by Inductively Coupled Argon Plasma – Atomic Emission Spectrometry (ICP-AES).
2) As specified in EPA Method 3050B. Analysis was performed by Inductively Coupled Argon Plasma – Atomic Emission Spectrometry (ICP-AES).
3) As specified in EPA Method 3052. Analysis was performed by Inductively Coupled Argon Plasma – Atomic Emission Spectrometry (ICP-AES).
4) As specified in EPA Method 3060A & 7196A. The sample was alkaline digested by using EPA Method 3060A, and then analyzed by using Colorimetric method 7196A.
5) In house method. The sample was digested by acid. Analysis was performed by Atomic Absorption or Inductively Coupled Argon Plasma – Atomic Emission Spectrometry (ICP-AES).
6) With reference to SGS in-house method. Analysis was performed by GC/MS.

Test Results : 1-6) Please refer to next page.

Conclusion : 1-6) When tested as specified, the submitted samples comply with the requirements of RoHS Directive Consultation document on 2002/95/EC.

Signed for and on behalf of
SGS Hong Kong Ltd

Ho Ka Ting, Family
Laboratory Executive

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full, without prior written permission of the Company.

H12072375

5/F - 8/F & 28/F - 29/F, Metropole Square, 2 On Yiu Street, Siu Lek Yuen, Shatin, N.T., Hong Kong. ☎ (852) 2334 4481 ☎ (852) 2764 3126 www.hk.sgs.com



Test Report

No. 2027702/EC

Date : Jul 18 2005

Page 2 of 3

Test Results :

1-5)

Element	1	2	3	4	Limit of RoHS Consultant Document
Cadmium (Cd)	< 2 ppm	< 2 ppm	< 2 ppm	< 2 ppm	100 ppm
Lead (Pb)	< 2 ppm	< 2 ppm	< 2 ppm	13 ppm	1000 ppm
Mercury (Hg)	< 2 ppm	< 2 ppm	< 2 ppm	< 2 ppm	1000 ppm
Hexavalent Chromium (Cr ⁶⁺)	< 2 ppm	< 2 ppm	< 2 ppm	< 2 ppm	1000 ppm

(Results shown are of the total weight of samples)

Note: < = Less than
ppm = mg/kg

6)

Flame Retardants	1	2	Detection Limit	Limit of RoHS Consultant Document
Polybrominated Biphenyls (PBBs)	---	---	---	1000 ppm
Monobromobiphenyl	ND	ND	5 ppm	--
Dibromobiphenyl	ND	ND	5 ppm	--
Tribromobiphenyl	ND	ND	5 ppm	--
Tetrabromobiphenyl	ND	ND	5 ppm	--
Pentabromobiphenyl	ND	ND	5 ppm	--
Hexabromobiphenyl	ND	ND	5 ppm	--
Heptabromobiphenyl	ND	ND	5 ppm	--
Octabromobiphenyl	ND	ND	5 ppm	--
Nonabromobiphenyl	ND	ND	5 ppm	--
Decabromobiphenyl	ND	ND	5 ppm	--
Polybrominated Diphenylethers (PBDEs)	---	---	---	1000 ppm
Monobromodiphenyl ether	ND	ND	5 ppm	--
Dibromodiphenyl ether	ND	ND	5 ppm	--
Tribromodiphenyl ether	ND	ND	5 ppm	--
Tetrabromodiphenyl ether	ND	ND	5 ppm	--
Pentabromodiphenyl ether	ND	ND	5 ppm	--
Hexabromodiphenyl ether	ND	ND	5 ppm	--
Heptabromodiphenyl ether	ND	ND	5 ppm	--
Octabromodiphenyl ether	ND	ND	5 ppm	--
Nonabromodiphenyl ether	ND	ND	5 ppm	--
Decabromodiphenyl ether	ND	23 ppm	5 ppm	--

Note: ND = Not Detected

Non-detected is lower than detection limit value.

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full, without prior written permission of the Company.

H12072376

SGS Testing (Hong Kong) Limited, 5/F - 8/F & 29/F - 29/E, Metropole Square, 2 On Yiu Street, Siu Lek Yuen, Shatin, N.T., Hong Kong. t (852) 2334 4481 f (852) 2764 3126 www.hk.sgs.com



Test Report

No. 2027702/EC

Date : Jul 18 2005

Page 3 of 3

Test Results (Cont'd) :

Flame Retardants	3	4	Detection Limit	Limit of RoHS Consultant Document
Polybrominated Biphenyls (PBBs)	---	---	---	1000 ppm
Monobromobiphenyl	ND	ND	5 ppm	--
Dibromobiphenyl	ND	ND	5 ppm	--
Tribromobiphenyl	ND	ND	5 ppm	--
Tetrabromobiphenyl	ND	ND	5 ppm	--
Pentabromobiphenyl	ND	ND	5 ppm	--
Hexabromobiphenyl	ND	ND	5 ppm	--
Heptabromobiphenyl	ND	ND	5 ppm	--
Octabromobiphenyl	ND	ND	5 ppm	--
Nonabromobiphenyl	ND	ND	5 ppm	--
Decabromobiphenyl	ND	ND	5 ppm	--
Polybrominated Diphenylethers (PBDEs)	---	---	---	1000 ppm
Monobromodiphenyl ether	ND	ND	5 ppm	--
Dibromodiphenyl ether	ND	ND	5 ppm	--
Tribromodiphenyl ether	ND	ND	5 ppm	--
Tetrabromodiphenyl ether	ND	ND	5 ppm	--
Pentabromodiphenyl ether	ND	ND	5 ppm	--
Hexabromodiphenyl ether	ND	ND	5 ppm	--
Heptabromodiphenyl ether	ND	ND	5 ppm	--
Octabromodiphenyl ether	ND	ND	5 ppm	--
Nonabromodiphenyl ether	ND	ND	5 ppm	--
Decabromodiphenyl ether	ND	ND	5 ppm	--

Note: ND = Not Detected

Non-detected is lower than detection limit value.

Sample Description:

1. Red Plastic w/ White Printing (Dip Switch Case)
2. Black Plastic (Pin Holder) w/ Glue
3. White Plastic (Switch)
4. Golden Metal (Pin)

Remark: Photo appendix is included

*** End of Report ***

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full, without prior written permission of the Company.

H12072377


SGS Hong Kong : 5/F - 8/F & 28/F - 29/F, Metropole Square, 2 On Yiu Street, Siu Lek Yuen, Shatin, N.T., Hong Kong. ☎ (852) 2334 4481 ☎ (852) 2764 3126 www.hk.sgs.com



Test Report No. : 2027702/EC


Sample Receiving Date : JUN 21 2005

PHOTO APPENDIX

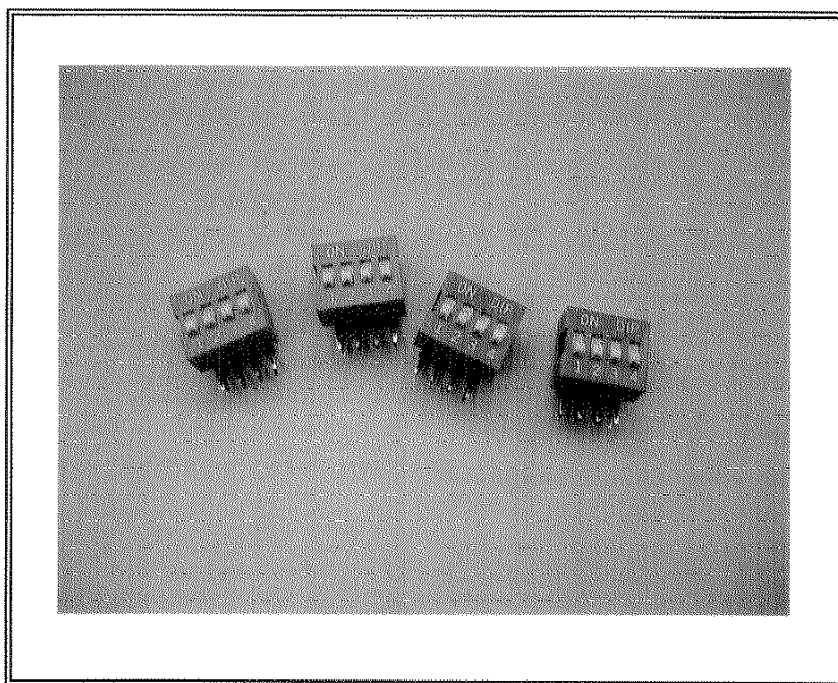

SGS authenticate the photo on original report only

Page 1 of 1


Authorized Signature
Ho Ka Ting, Family
Laboratory Executive

This test document cannot be reproduced in any way, except in full context, without prior approval in writing from SGS.