


PART NO.

**SIP Series** 

		REVISIONS						
ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	Α	RELEASED	Siva	07/3/08	Suresh	07/3/08	G. C	21/3/08

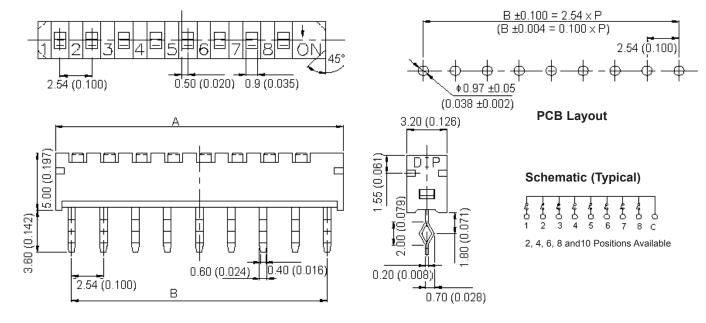

Dimensions : Millimetres (Inches)

(the 'Group') or are learned to it. No licence is granted for the use of it other than for information proposes in connection with the products to which it relates. No licence of any intellectual properly rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it to fire any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or dramage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SFC MULTICOM's the two greater drademark of the Group. O Premier Farnel (plc 2008.)

TOLERANCES:
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Siva	07/03/08
CHECKED BY:	DATE:
Suresh	07/03/08
APPROVED BY:	DATE:
G.Cook	21/03/08

DRAWING TITLE:								
Single In Line Switches - Straight Terminals								
SIZE	DWG NO.		ELECTRONIC FILE	REV				
Α		M10000823	SIP-V (SIP-T)_DWG	Α				
SCALE: NTS		U.O.M.: mm (Inches)	SHEET: 1 OF	3				



**REVISIONS** PART NO. DESCRIPTION ECN# REV DRAWN DATE CHECKD DATE APPRVD DATE **SIP Series** Α RELEASED Siva 07/3/08 Suresh 07/3/08 21/3/08 G. C

## Specifications:

Mechanical:

: 500 cycles. Mechanical life Operating force : 800gf. Operating temperature : -30 to +80°C. Storage temperature : -30 to +80°C.

Electrical:

Electrical life : 500 cycles. Non-switching rating : 100mA, 50V dc. Switching rating : 10mA, 5V dc. Maximum contact resistance at 100mA current :  $100m\Omega$  at intial  $200 m\Omega$  after life test. Minimum insulation resistance :  $100M\Omega$  (500V dc). : 300V ac/1 minute.

Dielectric strength Circuit : SPST.

Materials:

Cover : UL 94V-0 Nylon high temperature thermoplastic.

Colour : Black.

Base : UL 94V-0 PBT or nylon high temperature thermoplastic.

Colour : Black.

Actuator : UL 94V-0 Nylon thermoplastic.

Colour : White.

Contact : Alloy copper with gold plated. **Terminal** : Brass C2680-H with tin plated.

## **Soldering Process:**

Wave soldering: Recommended solder temperature at 500°F(260°C) maximum 5 seconds.

Hand soldering: Use a soldering ion of 30 watts, controlled at 350°C approximately maximum 5 seconds while applying solder.

roup for	TOLERANCES:	DRAWN BY:	DATE:	DRAWING TITLE:						
e vith-	UNLESS OTHERWISE	Siva	07/03/08	Single In Line Switches - Straight Terminals						ls
du is	SPECIFIED,	CHECKED BY:	DATE:	SIZE	DWG NO.		ELECTRONIC FILE			REV
	DIMENSIONS ARE FOR REFERENCE	Suresh	07/03/08	Α		M10000823	SIP-V (SIP-T) DWG		A	
	PURPOSES ONLY.	APPROVED BY:	DATE:	H			<del>                                     </del>			_
ice. 2008.		G.Cook	21/03/08	SCALE: NTS		U.O.M.: mm (Inches)	SHEET: 2 C		2 0	F 3



PART NO.

**SIP Series** 


	REVISIONS							
ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	Α	RELEASED	Siva	07/3/08	Suresh	07/3/08	G. C	21/3/08

## **Specifications Table**

Number of Positions	Dimensions (A)	Dimensions (B)	Part Number
2	7.62 (0.300)	5.08 (0.200)	SIP-02T
4	12.70 (0.500)	10.16 (0.400)	SIP-04T
10	27.94 (1.100)	25.40 (1.000)	SIP-10T

Dimensions: Millimetres (Inches)

## **Part Number Explanation**



: 02 = 2 Positions. **Number of Positions** 

04 = 4 Positions. 10 = 10 Positions.

Terminal Style : T = Straight.

http://www.farnell.com

http://www.newark.com

http://www.cpc.co.uk

REV

Α

TOLERANCES: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Siva	07/03/08
CHECKED BY:	DATE:
Suresh	07/03/08
APPROVED BY:	DATE:
G.Cook	21/03/08

DRAWING TITLE: Single In Line Switches - Straight Terminals ELECTRONIC FILE DWG NO. SIZE M10000823 SIP-V (SIP-T)\_DWG Α SCALE: NTS U.O.M.: mm (Inches) SHEET: 3 OF 3