

Footswitches with single pedal

F1

Protection class IP 65




Designation	F1-U1Z	F1-U1Y	F1-SU1Z	F1-SU1 Mi RG
Part number	606.1100.005	606.1100.001	606.1300.011	616.1300.327
Circuit diagram				
1) pressure point	23 - 24 11 - 12 o	23 - 24 11 - 12 o	21 - 22 13 - 14 o	P1 - P3 P2 - 14 11 - 12 o
Slow make & break/snap action	●/-	●/-	-●	-●
Pressure point	-	-	-	-
Latching switch	-	●	-	-
Potentiometer	-	-	-	● 10 kΩ 2 W ²⁾
Pedal interlocking	-	-	-	-
Emergency stop function	-	-	-	-
Power contactor	-	-	-	-
Voltage	max.	500 V AC	500 V AC	250 V AC DC
Permanent current	max.	10 A	10 A	5 A
In-rush current complies with standards		●	●	●
IEC 947-5-1 AC 15/DC 13				
Switching frequency	max.	50/min.	50/min.	20/min.
Mechanical life – number of switching actions		10 x 10 ⁶	10 x 10 ⁶	10 x 10 ⁶
Mechanical life – number of revolutions		-	-	50 x 10 ³ ³⁾
Operating temperature	min./max.	-30 °C/+80 °C	-30 °C/+80 °C	-30 °C/+80 °C
		-22 °F/+176 °F	-22 °F/+176 °F	-22 °F/+176 °F
Approvals	BG, CSA, UL	BG, CSA, UL	BG, CSA, UL	-
Cable entry	1 x M 20			
Weight	0.60 kg/1.3 lb	0.60 kg/1.3 lb	0.60 kg/1.3 lb	0.75 kg/1.65 lb
Delivery: ex-stock/built to order	●/-	●/-	●/-	●/-

All dimensions in mm (inch)

²⁾ other resistance figures on request

³⁾ number of revolutions available up to 5 x 10⁶


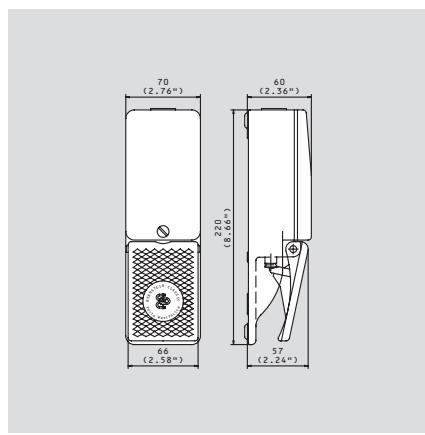




F1-U2Z

606.1200.003

F1-U2Z D

606.1200.007

●/-
-
-
-
-
-
-
-

●/-
●
-
-
-
-
-
-

500 V AC
10 A

500 V AC
10 A

●
50/min.
 10×10^6
-
-30 °C/+80 °C
-22 °F/+176 °F

●
50/min.
 10×10^6
-
-30 °C/+80 °C
-22 °F/+176 °F

BG, CSA, UL


BG, CSA, UL

3 x M 20

3 x M 20

0.60 kg/1.3 lb
●/-

0.70 kg/1.5 lb
●/-

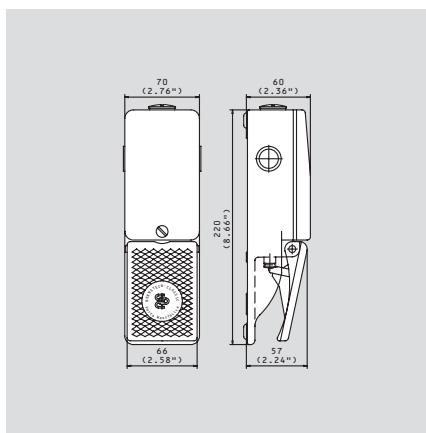

Footswitches with single pedal (guarded)


F1 UN






Protection class IP 65



Designation	F1-U1Z UN	F1-U1Y UN	F1-SU1Z UN
Part number	606.1600.006	606.1600.002	606.1800.012
Circuit diagram			
1) pressure point	23 - 24	23 - 24	21 - 22
2) Emergency stop button – self latching	11 - 12	11 - 12	13 - 14
Slow make & break/snap action			
Pressure point	●/-	●/-	-/●
Latching switch	-	-	-
Potentiometer	-	●	-
Pedal interlocking	-	-	-
Emergency stop function	-	-	-
Power contactor	-	-	-
Voltage			
Permanent current	500 V AC	500 V AC	500 V AC
In-rush current complies with standards	10 A	10 A	10 A
IEC 947-5-1 AC 15/DC 13	●	●	●
Switching frequency	50/min.	50/min.	50/min.
Mechanical life – number of switching actions	10 x 10 ⁶	10 x 10 ⁶	10 x 10 ⁶
Mechanical life – number of revolutions	-	-	-
Operating temperature	-30 °C/+80 °C	-30 °C/+80 °C	-30 °C/+80 °C
	-22 °F/+176 °F	-22 °F/+176 °F	-22 °F/+176 °F
Approvals			
Cable entry	BG, CSA, UL	BG, CSA, UL	BG, CSA, UL
Weight	1.50 kg/3.3 lb	1.50 kg/3.3 lb	1.50 kg/3.3 lb
Delivery: ex-stock/built to order	●/-	●/-	●/-

All dimensions in mm (inch)

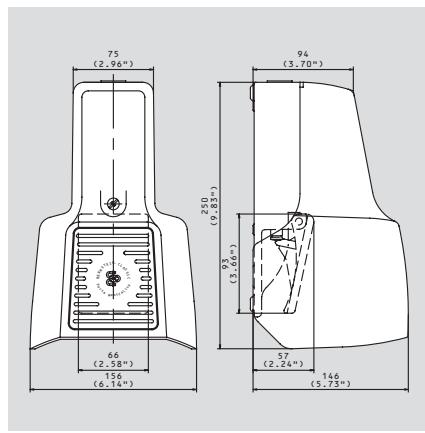

F1-UZZ UN
606.1700.004F1-UZZD UN
606.1700.008F1-U1Z NA2 UN
606.1600.435F1-U1Z AT UN
616.1600.400

●/-
-
-
-
-
-
-
-

●/-
●
-
-
-
-
-
-

●/-
-
-
-
-
●
-
-

●
-
-
-
-
-
-
-

500 V AC
10 A

500 V AC
10 A

500 V AC
10 A

600 V AC
10 A

500 V AC
10 A

50/min.
 10×10^6
-
-30 °C/+80 °C
-22 °F/+176 °F

50/min.
 10×10^6
-
-30 °C/+80 °C
-22 °F/+176 °F

50/min.
 10×10^6
-
-30 °C/+80 °C
-22 °F/+176 °F

50/min.
 10×10^6
-
-30 °C/+80 °C
-22 °F/+176 °F

BG, CSA, UL

BG, CSA, UL

BG, CSA, UL

BG, CSA, UL

3 x M 20

3 x M 20

3 x M 20




1 x M 20

1.50 kg/3.3 lb
●/-

1.60 kg/3.5 lb
●/-

1.60 kg/3.5 lb
●/-


1.50 kg/3.3 lb
-/●

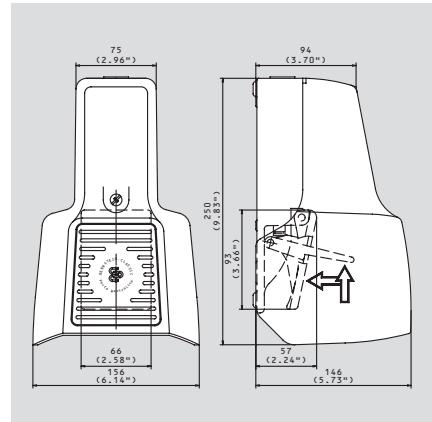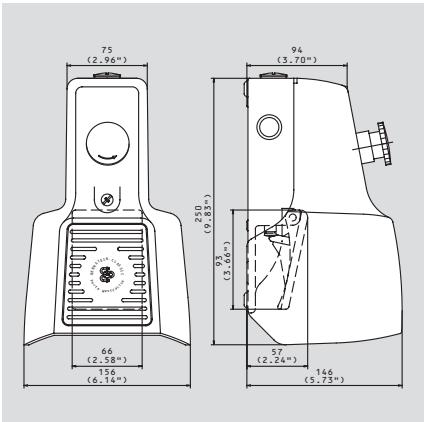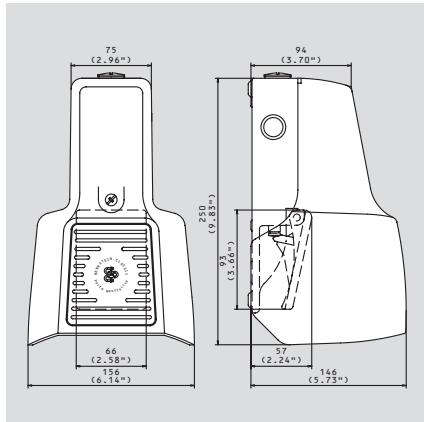

Safety footswitch

Safety latch with manual reset

Protection class IP 65

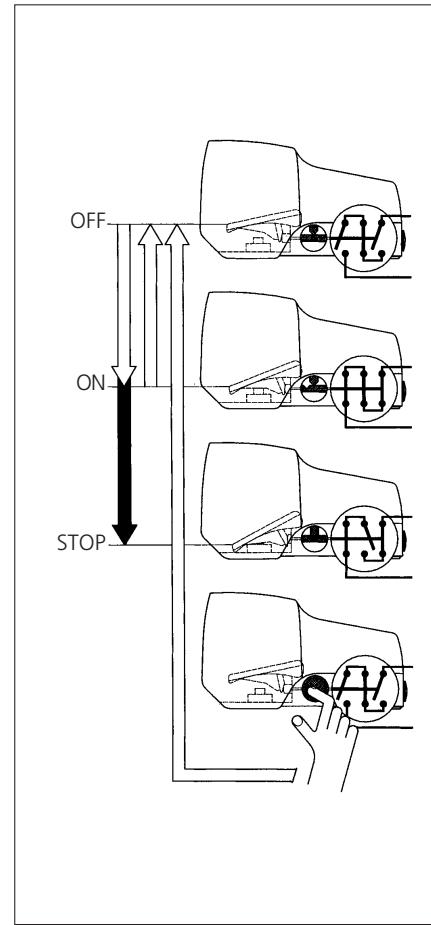

Designation

Part number

Circuit diagram

1) pressure point
2) latch

F1-SU1Z/UV1 DUN

616.1000.203

Slow make & break/snap action

Pressure point

Latching switch

Potentiometer

Pedal interlocking

Emergency stop function

Power contactor

Voltage max.

Permanent current max.

In-rush current complies with standards

IEC 947-5-1 AC 15/DC 13

Switching frequency max.

Mechanical life – number of switching actions

Mechanical life – number of revolutions

Operating temperature min./max.

500 V AC

10 A

●

50/min.

10×10^6

-30 °C/+80 °C

-22 °F/+176 °F

Approvals

BG, UL, CSA

Cable entry

1 x M 20


Weight

Delivery: ex-stock/built to order

1.50 kg/3.3 lb

●/-

All dimensions in mm (inch)

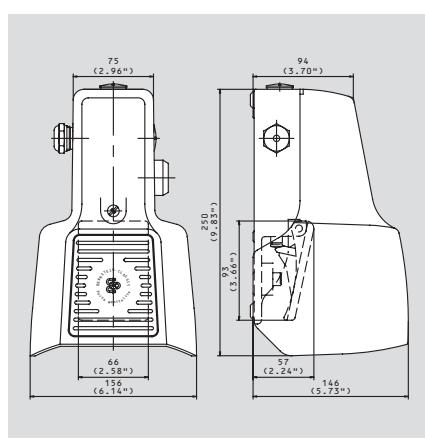

1. Depressing the pedal to the pressure point closes the contact and the operating process starts.

2. In an emergency situation the pressure point is overcome – the contact is opened and locked – the operating process is then interrupted. The latching mechanism holds the contact in the off position ensuring that an uncontrolled restart or new start of the machine cannot happen.

3. Interlocking: Only by releasing the locking device manually (reset button on the side of the housing), after the dangerous situation has been cleared, can the contacts be set to normal again. The operating process can then be repeated by operating the pedal to the pressure point.