



Description .....	3
Product assembly .....	4
Keypads .....	5
Technical Data.....	6
Drawings.....	7
Index.....	11

## Product Information

### General notes

The 12 or 16 key S.series keypads are specially designed for public environment applications, such as vending machines, ticket machines, payment terminals, telephones, access control systems and industrial machinery.

Keys and housing are built from chrome plated zinc alloy (Zamak). The S.series therefore has high resistance to impact and vandalism and is also sealed to IP 67.

### Mounting

The keypad may be mounted from either the front or rear of a panel.

Front mounted keypads require a small cutout for the pin header connector on the back side of the S.series.

Rear mounted keypads are mounted through a rectangular cutout.

To ensure IP 67 sealing a gasket is supplied with the keypad and this is suitable for both forms of mounting.

### Contacts

To ensure integrity of contacts and lower switch ratings, the contacts are gilded and external connection to the keypad is by means of a pin header on the back.

The electrical keypad circuit can be supplied in a choice of either matrix or common point configuration.

### Keys

The metal anti pull-off keys are highly resistant to shock and fire.

### Marking

Non-illuminated keys are engraved with the characters filled in black. Custom markings or symbols in different colours are available on request.

Illuminated keys are moulded with characters that are cutout then filled with a clear resistant resin for clear illumination.


### Illumination

On illuminated versions the keys are individually lit with yellow or blue LED's which them especially suitable in poorly lit locations. Other LED colours are available on request.

*We reserve the right to modify technical data*


*All dimensions in mm*

## Keypad 12 keys, back mounting

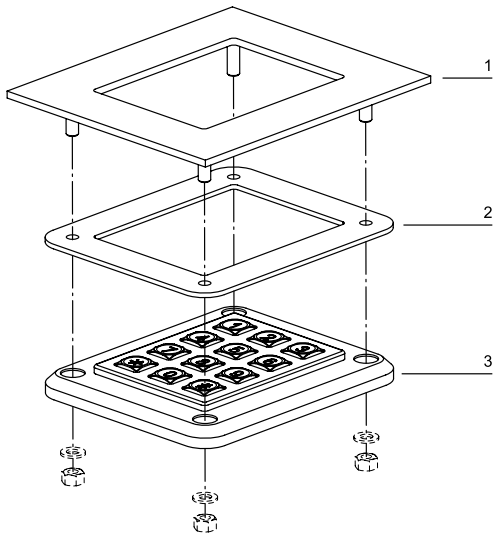

- 1 Front panel
- 2 Gasket
- 3 Keypad

## Keypad 16 keys, front mounting

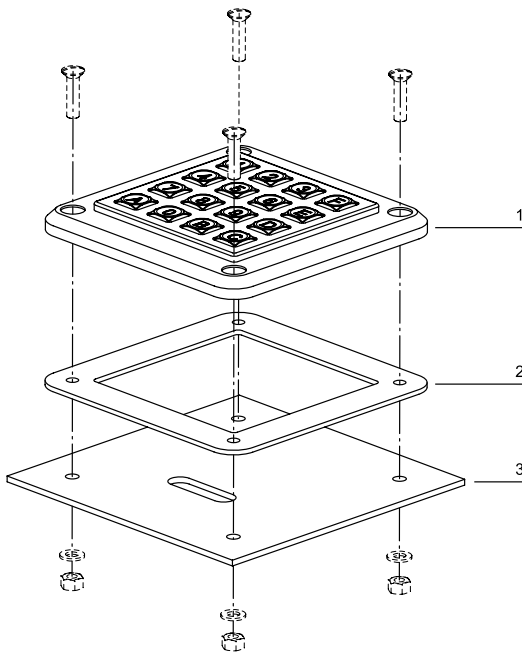

- 1 Keypad
- 2 Gasket
- 3 Front panel

## Keypad



	Front protection	Terminals	Key cap	No. of keys	Marking	Illumination	Circuit	□ 63 x 82 mm Typ-Nr.	□ 82 x 82 mm Typ-Nr.	Component layout	Mounting dimensions	Technical drawing	Ⓜ
<b>Keypad</b> non-removable metal keys, vandal resistant	IP 67	PH	Zamak chromed	12	Telephone	LED blue	P	<b>S.12100.211</b>		3	1	1	0.550
							M	<b>S.12150.211</b>		2	1	1	0.550
						LED yellow	P	<b>S.12100.241</b>		3	1	1	0.550
						M	<b>S.12150.241</b>		2	1	1	0.550	
					Telephone black	without	P	<b>S.12100.001</b>		3	1	1	0.550
							M	<b>S.12150.001</b>		2	1	1	0.550
				16	Hexadezimal	LED blue	P		<b>S.16300.211</b>	4	2	2	0.650
							M		<b>S.16350.211</b>	1	2	2	0.650
						LED yellow	P		<b>S.16300.241</b>	4	2	2	0.650
						M		<b>S.16350.241</b>	1	2	2	0.650	
					Hexadecimal black	without	P		<b>S.16300.001</b>	4	2	2	0.650
							M		<b>S.16350.001</b>	1	2	2	0.650

Other options on request :

Custom colours, LED colours and markings

Terminals: PH = Pin header

Circuit: P = Common point, M = Matrix

Component layout from page 7, Mounting dimensions from page 9, Technical drawing from page 10

## Keypad

### Material

#### Keys

Zamak 5 with chrome finish

#### Housing

Zamak 5 with chrome finish

#### Back plate

Steel chromated

#### Contacts

Carbon pill  
Carbon on Cu tracks

### Mechanical characteristics

#### Actuating force

1 N ... 3 N

#### Actuating travel

1.3 mm  $\pm$ 0.3 mm

#### Rebound time

$\leq$ 40 ms

### Electrical characteristics

#### Operating voltage/-current

Nominal 5 V, 5 mA  
Maximum voltage 24 V  
Minimum voltage 0.5 V  
Minimum current 0.1 mA

#### Illumination

Current consumption for single LED :  
20 mA at 2.1 V (yellow and green)  
20 mA at 1.9 V (red)  
10 mA at 3.4 V (blue)

#### Isolation resistance

$\geq$ 1000 M $\Omega$  at 100 VDC

#### Contact resistance

$\leq$ 200  $\Omega$

#### Electrical life

4 Million cycles of operation per key

#### Electrostatic breakdown value

5 kV

#### Electric strength

1500 V<sub>rms</sub>, 50 Hz, 1 min., as per EN IEC 60512-2

### Environmental conditions

#### Storage temperature

-30 °C ... +85 °C

#### Operating temperature

-25°C ... +85°C

#### Front protection

IP 67 as per IEC 60529, when mounted

#### Climate resistance


as per EN IEC 60512-6  
Damp heat : 21 days  
Dry heat : 10 days, +85 °C  
Saline mist : 96 hours

#### Impact resistance

IK10 (20 J)


## Component layout

### 1 Keypad page 5


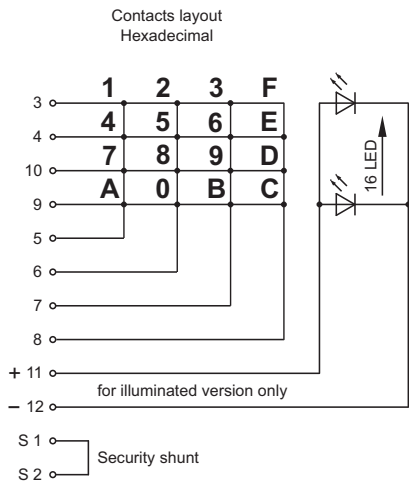


12 keys, Matrix, Hexadecimal



### 2 Keypad page 5

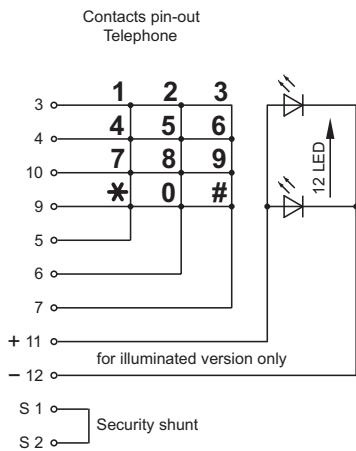

12 keys, Matrix, Telephone

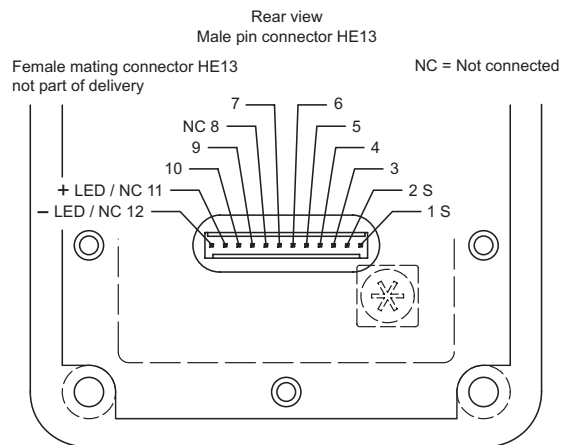
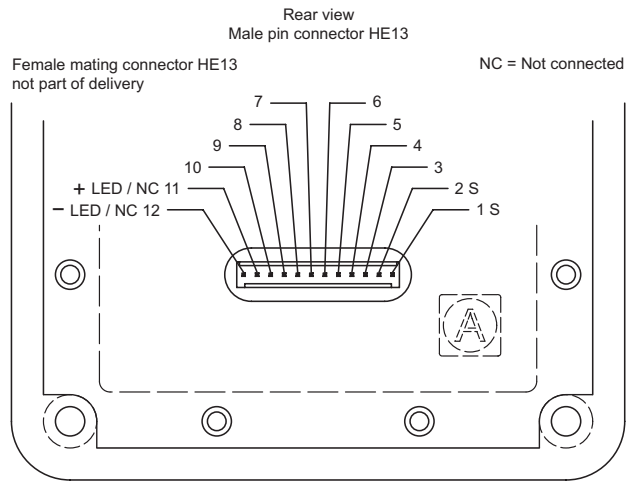


### 3 Keypad page 5

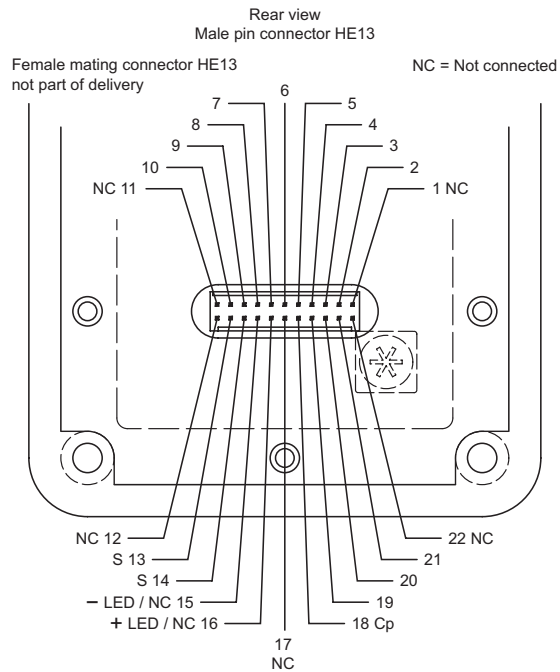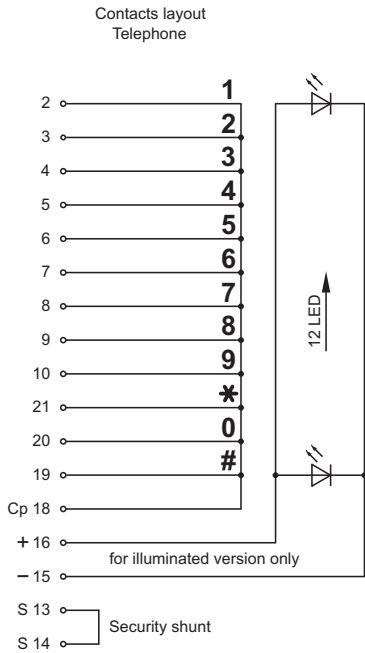

12 keys, Common point, Telephone

### 4 Keypad page 5

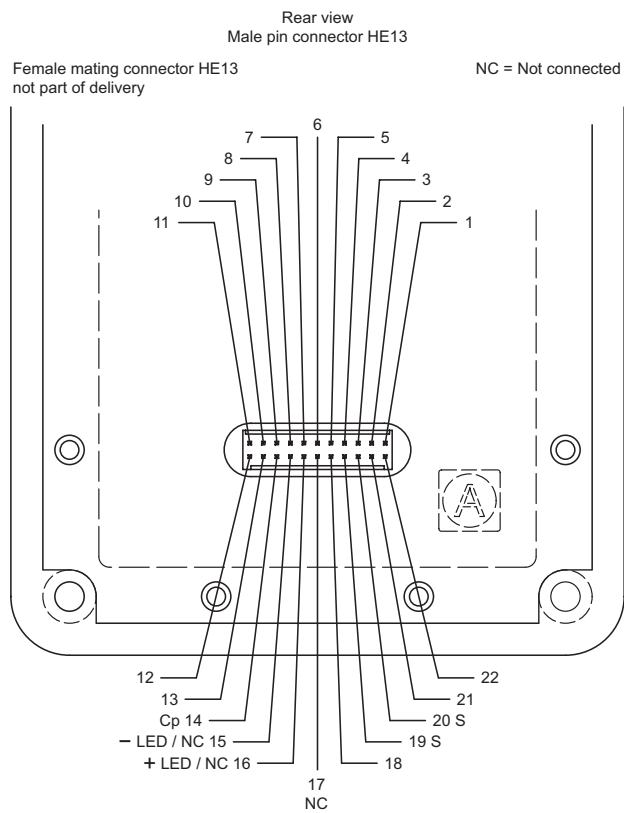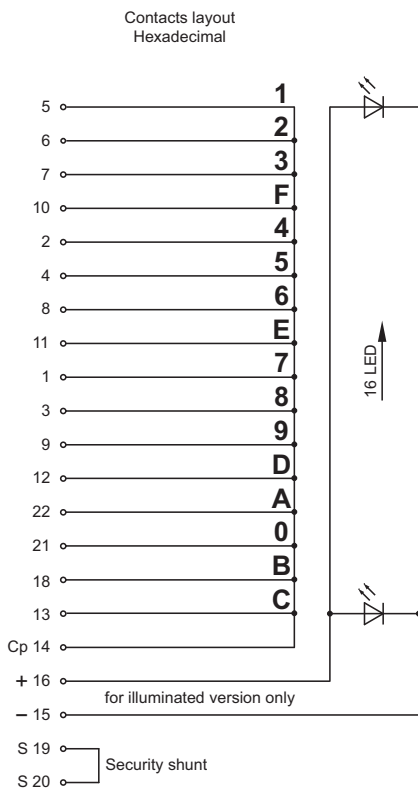


12 keys, Common point, Hexadecimal




## Mounting dimensions

### 1 Keypad page 5

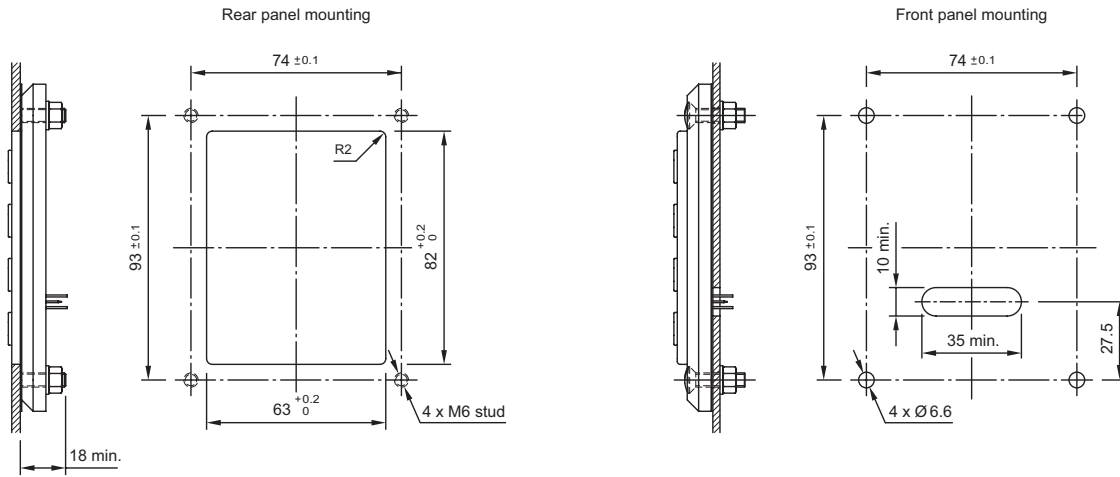

12 keys

### 2 Keypad page 5

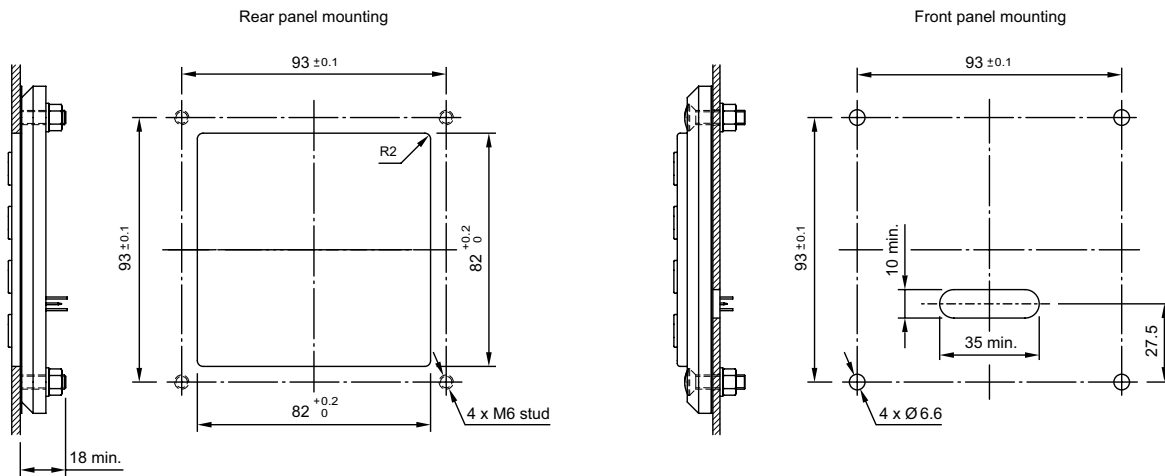

16 keys



# Index from Typ Nr.

<u>Typ-Nr.</u>	<u>Page</u>	<u>Typ-Nr.</u>	<u>Page</u>	<u>Typ-Nr.</u>	<u>Page</u>
S.12100.001 .....	5				
S.12100.211 .....	5				
S.12100.241 .....	5				
S.12150.001 .....	5				
S.12150.211 .....	5				
S.12150.241 .....	5				
S.16300.001 .....	5				
S.16300.211 .....	5				
S.16300.241 .....	5				
S.16350.001 .....	5				
S.16350.211 .....	5				
S.16350.241 .....	5				