


Magnetic Alarm Reed Switch

Features

- 3/8" (9mm) Dia with 18" Long Wire Leads
- Easy & Quick Installation
- Longer Length
- Operate Gap 3/4" (19mm) min.



S101

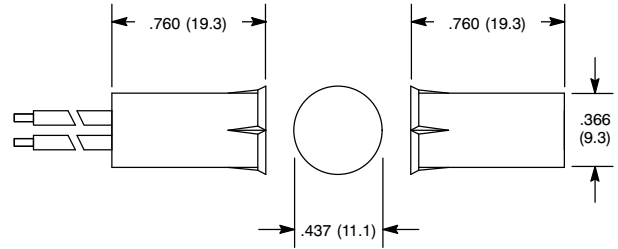

Specifications

Contact Rating: 10W/VA
Contact Resistance: 150 milliohms.
Contact Material: Ruthenium Oxide over Palladium
Switching Voltage: 200 VDC max.
Switching Current: 500mA max.
Insulation Resistance: 10 gigohms
Shock Resistance: 30G for 11mS
Vibration Resistance: 20G (10 to 1000Hz)
Life Expectancy: 20,000,000 cycles (resistive load, 12VDC, 250mA)
Operating Gap: .748" (19mm) min.
Terminal Type: Wire Leads
Mounting Hole: .375" (9mm)

NTE Type No.	Circuitry	Action	Actuator	Diag No.
54-629	SPST-NO	NO fo Closed Loop System	Magnet	S101


Magnetic Alarm Reed Switch

Features

- 3/8" (9mm) Dia with Adaptor Holder
- Wide Operating Gap 3/4" (19mm) min.
- Easy & Quick Installation
- 3/4" Adaptor/Holder



S102

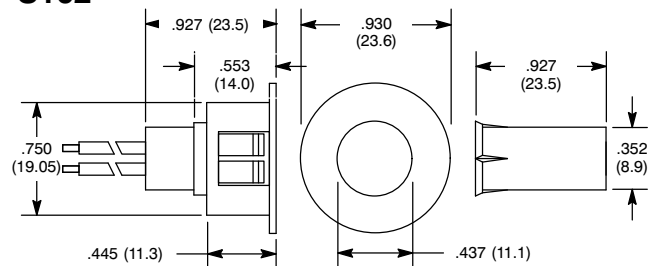

Specifications

Contact Rating: 10W/VA
Contact Resistance: 150 milliohms.
Contact Material: Ruthenium Oxide over Palladium
Switching Voltage: 200 VDC max.
Switching Current: 500mA max.
Insulation Resistance: 10 gigohms
Shock Resistance: 30G for 11mS
Vibration Resistance: 20G (10 to 1000Hz)
Life Expectancy: 20,000,000 cycles (resistive load, 12VDC, 250mA)
Operating Gap: .748" (19mm) min.
Terminal Type: Wire Leads
Mounting Hole: .375" (9mm)

NTE Type No.	Circuitry	Action	Actuator	Diag No.
54-631	SPST-NO	NO for Closed Loop System	Magnet	S102