

Miniature Slide Switches




Specifications:

Contact rating:	30 V DC, 350 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	- 10° to + 70° C
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Contact timing:	non-shorting
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 3 sec, 260° C ± 5° C


Models:	Operating positions	Length (mm)	
		A	B

4



MFP 120	2		11,0	6,6
MFP 130	3	1 2 3 4 5 5 5 5 5 5 5	15,0	10,0
MFP 140	4		18,2	13,2
MFP 150	5		21,4	16,4



MFP 120 – R	2		11,0	6,6
MFP 130 – R	3	1 2 3 4 5 5 5 5 5 5 5	15,0	10,0
MFP 140 – R	4		18,2	13,2
MFP 150 – R	5		21,4	16,4



MFP 220	2		13,6	6,9
MFP 230	3		16,8	10,1
MFP 240	4	1 2 3 4 5 6 5 5 5 5 5 5 5 5	20,0	13,3
MFP 250	5		23,2	16,5
MFP 260	6		26,4	19,7

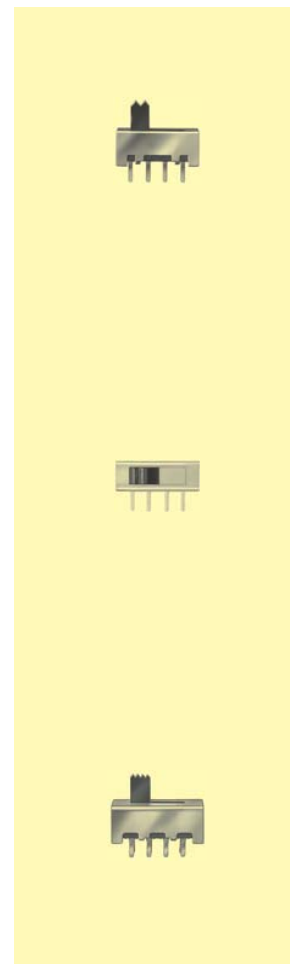




Miniature Slide Switches

Specifications:


Contact rating:	30 V DC, 350 mA
Contact resistance:	< 25 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Contact timing:	non-shorting
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 10 sec, 260° C

Models:	Operating positions	Length (mm)	
		A	B


MFP 1370	3	20,0	7,6
MFP 1470	4	20,0	9,9
MFP 1570	5	22,0	12,2



MFP 1370 – R	3	20,0	7,6
MFP 1470 – R	4	20,0	9,9
MFP 1570 – R	5	22,0	12,2



4

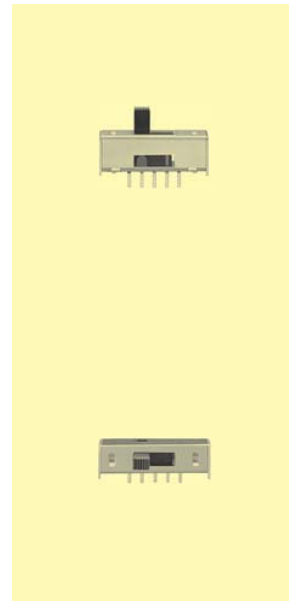


Miniature Slide Switches

Specifications:


Contact rating:	30 V DC, 350 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Contact timing:	shorting (non-shorting only if specified)
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 5 sec, 260° C ± 5° C

Models:	Operating positions	Length (mm)	
		A	B


MFP 1220	2	13,0	7,5
MFP 1320	3	15,5	10,0
MFP 1420	4	18,0	12,5
MFP 1520	5	20,5	15,0
MFP 1620	6	23,0	17,5





MFP 1220 – R	2	13,0	7,5
MFP 1320 – R	3	15,5	10,0
MFP 1420 – R	4	18,0	12,5
MFP 1520 – R	5	20,5	15,0
MFP 1620 – R	6	23,0	17,5



MFP 1323	3	15,5	10,0
MFP 1424	4	18,0	12,5



MFP 1323 – R	3	15,5	10,0
MFP 1424 – R	4	18,0	12,5

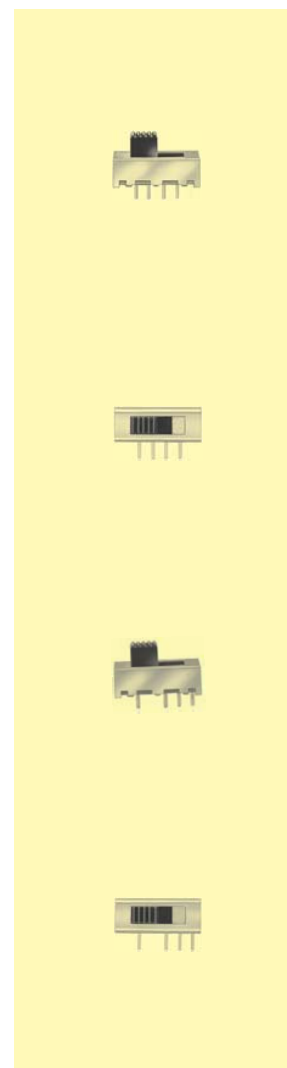

Miniature Slide Switches






Specifications: see page 102

Material: plastic housing, terminals sealed

Models: Switching functions




MFP 161 D

on on






MFP 261 N

on on






MFP 263 P

on on on








MFP 461 N
non-shorting

on on



MFP 661 N

on on



4




Miniature Slide Switches

Specifications: see page 102


Material: plastic housing, terminals sealed

Models: Switching functions


MFP 261 N – RA on on



MFP 263 P – RA on on on



MFP 461 N – RA on on non-shorting



Miniature Slide Switches

Specifications:


Contact rating:	12 V DC, 100 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 5 sec, 260° C ± 5° C

Models:

	Switching functions						
--	---------------------	--	--	--	--	--	--


MFP 113 D
non-shorting

on on




MFP 213 N
non-shorting

on on



MFP 213 P
shorting

on on on






Miniature Slide Switches

Specifications:


Contact rating:	12 V DC, 100 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 5 sec, 260° C ± 5° C

Models: Switching functions


MFP 113 D – RA on on
non shorting



MFP 213 N – RA on on
non-shorting



MFP 213 P – RA on on on
shorting




Miniature Slide Switches

Specifications:


Contact rating:	30 V DC, 350 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Contact timing:	non-shorting
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 5 sec, 260° C ± 5° C

Models: Switching functions



MFP 102 D on on




MFP 191 D on on



MFP 201 N on on



MFP 211 N on on






Miniature Slide Switches

Specifications:


Contact rating:	30 V DC, 350 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC; MFPP 130 – RA: 250 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Mechanical life:	minimum 10 000 operations; MFPP 130 – RA > 100 000
Contacts:	copper alloy, silver-plated over nickel barrier
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 5 sec, 260° C ± 5° C

Models: Switching functions


MFP 101 D – RA on on
non-shorting



MFP 121 D – RA on on
non-shorting





MFP 201 N – RA on on
non-shorting



Miniature Slide Switches/ Pushbutton Switches

MFPP 130 – RA on on on

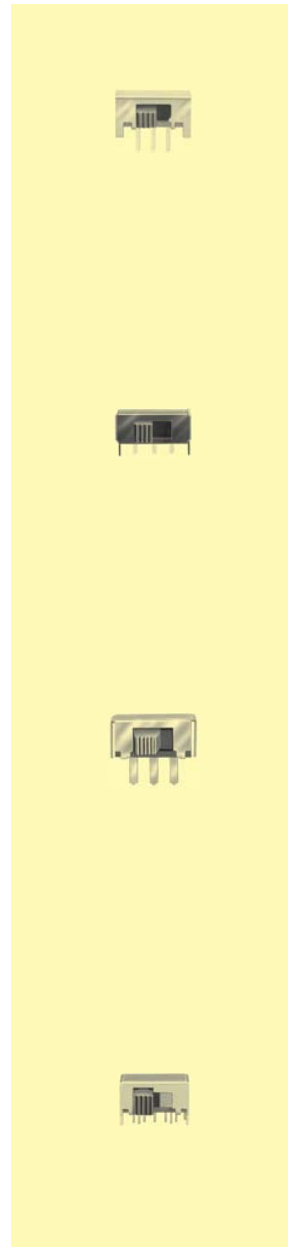

Miniature Slide Switches

Specifications:


Contact rating:	30 V DC, 350 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Slide colour:	black, further colours on request
Soldering conditions:	auto-soldering – max.: 5 sec, 260° C ± 5° C

Models:

Models:	Switching functions
---------	---------------------


MFP 221 N
non-shorting

on on




MFP 223 P
shorting

on on on

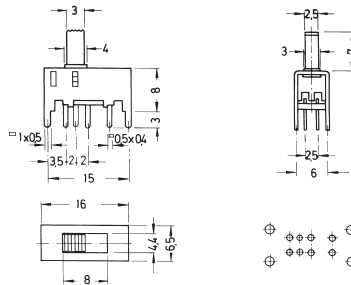



MFP 231 P
shorting

on on on

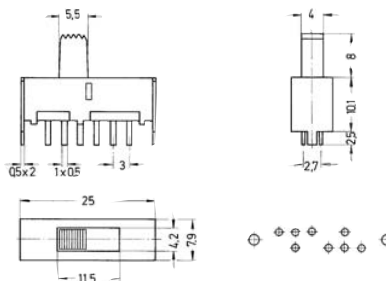

MFP 291 N
non-shorting

on on

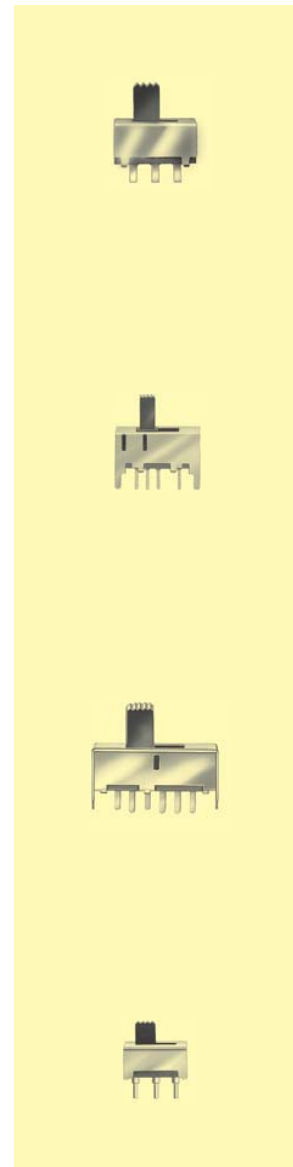



Miniature Slide Switches

Specifications:


Contact rating:	30 V DC, 350 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Mechanical life:	minimum 10 000 operations
Contacts:	copper alloy, silver-plated over nickel barrier
Slide colour:	black, further colours on request
Soldering conditions:	hand-soldering – max.: 5 sec, 270° C

Models:

Switching functions


MFS 121 D
non-shorting

on on




MFS 131 D
non-shorting

on on

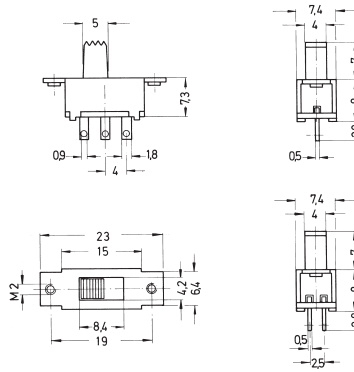

MFS 201 N
non-shorting

on on

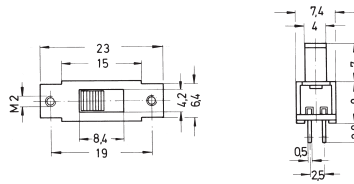

MFS 231 P
shorting

on on on

