




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART, CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1501	A	RELEASED	JWM	11/17/03	HO	11/25/03	JC	11/26/03

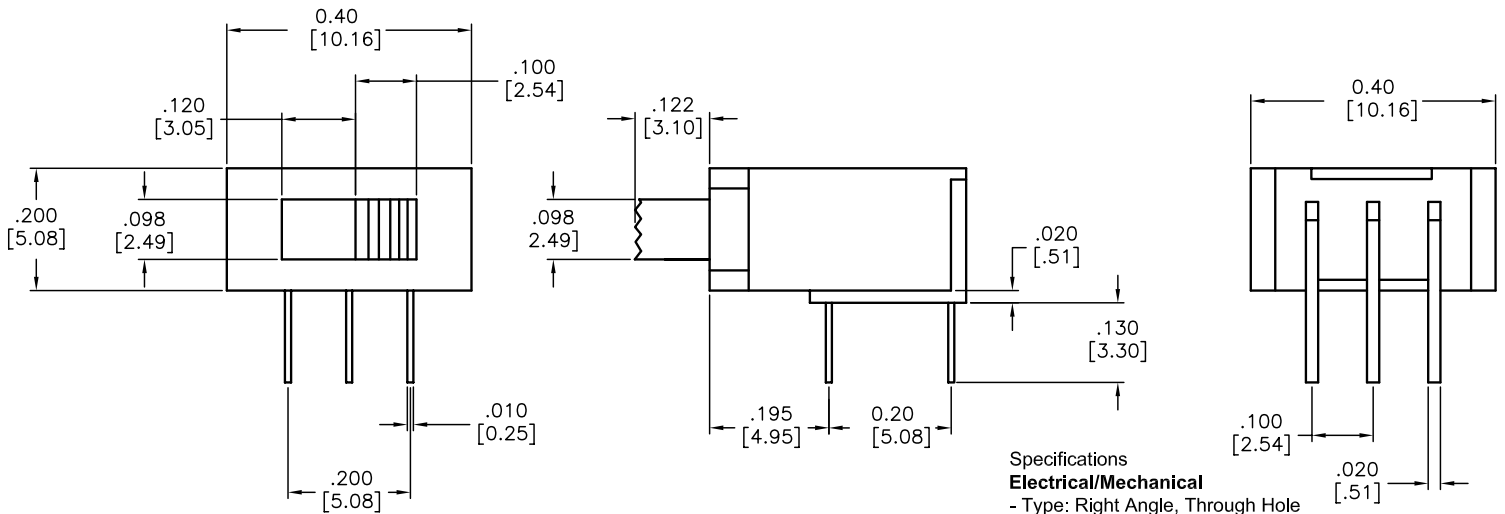

Specifications

Electrical/Mechanical

- Type: Right Angle, Through Hole
- Contact Timing: Non-shorting, break before make
- Contact Rating: 0.4 VA Max. at 20 V Max. (AC or DC)
- Termination: PC Mount
- Contact Resistance: 10 milliohms max.
- Insulation Resistance: 1,000 Megohms min. at 500 VDC
- Dielectric Strength: 1,000 VRMS
- Life: 30,000 Cycles

Material


- Housing: Stainless Steel
- Base: Phenolic
- Actuator: Nylon
- Moving Contacts: Phosphor Bronze, Gold Plated
- Fixed Contacts/Terminals: Copper Alloy, Gold Plated

Environmental

- Operating Temperature: -30°C to 85°C

	SWITCHING FUNCTION		
CONN. TERMS	2-1	OPEN	2-3
SCHMATIC			

NON-SHORTING TYPE



DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jeff McVicker	11/17/03
CHECKED BY:	DATE:
Hisham Odish	11/25/03
APPROVED BY:	DATE:
John Cole	11/26/03

DRAWING TITLE: Slide Switch, Miniature, SPDT PCB Mount			
SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	SPC12443	53H6876.dwg	A
SCALE: NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1	