
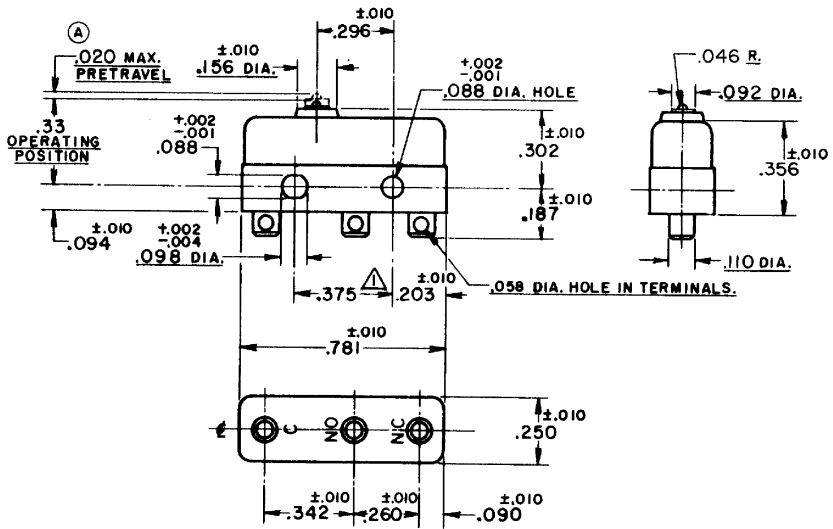


FO-55111-A
 HONEYWELL
 PART NUMBER
 11SM144
 PRODUCT CODE
 TWV4400

REV	DOCUMENT	CHANGED BY	CHECK
8	0038223	SSK 17APR08	BLR



NOTE-
 ▲ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX. DIA. ON .375^{±.002} CENTERS.
 2- TERMINALS ARE PLATED FOR SOLDERING.
 3-SWITCH WILL WITHSTAND TEMPERATURE OF 250°F.

RELEASE NO. SR - 7853
 REPLACES

CHARACTERISTICS	OPERATING FORCE - - - - 3 OZ MAX	ELECTRICAL DATA CONTACT ARRANGEMENT S P D T 30 VOLTS DC RATING SEA LEVEL 50,000 FT INDUCTIVE 3 AMP 2.5 AMP RESISTIVE 5 AMP 5 AMP MAXIMUM INRUSH 24 AMP	DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE .X ± ONE PLACE .XX ± TWO PLACE .XXX ± THREE PLACE .XXXX ± FOUR PLACE .XXXXX ± ANGLES ±	DRAWN	VK	27 NOV 07
	RELEASE FORCE - - - - 1 OZ MIN			CHECK	RJ	27 NOV 07
	DIFFERENTIAL TRAVEL - - .002 MAX OVERTRAVEL - - - - .005 MIN			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
APPROVALS	KEMA CE UL CSA 5A, 250V ~ T85 1E4 5A, 250 VAC	CE	THIRD ANGLE PROJECTION	INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		RASTER

Honeywell			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	11SM144	8
SCALE	-	WEIGHT.006 LB MAX	SHEET 1 OF 1