


FO-55111-A

HONEYWELL  
PART NUMBER  
11SM601-H4  
PRODUCT CODE  
TWY1804

REV	DOCUMENT	CHANGED BY	CHECK
9	0038224	KVS 22APR08	ASD

FOR FACTORY USE ONLY

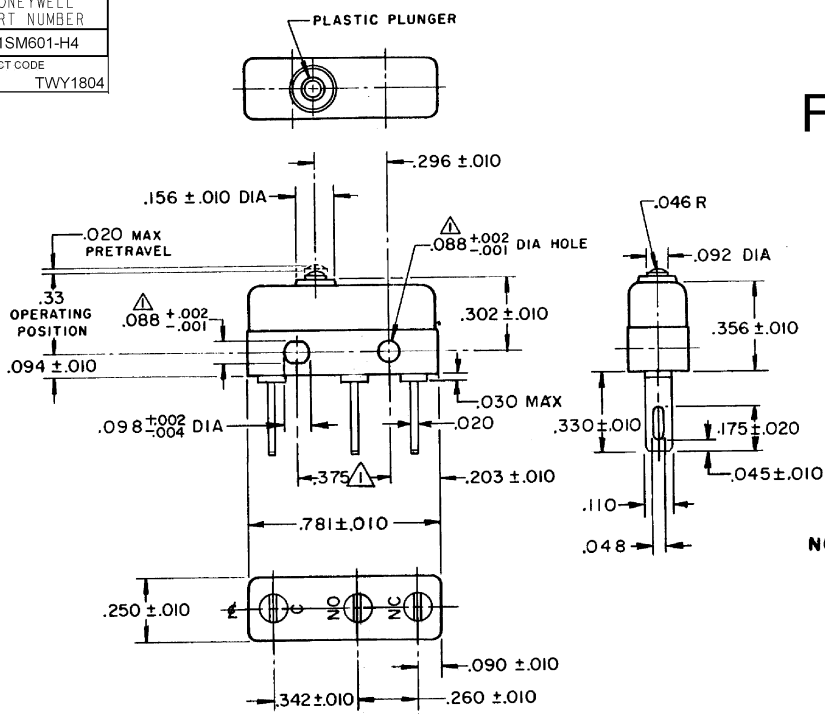

NOTE -  
 ▲ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS  
 2 - TERMINALS ARE PLATED FOR SOLDERING  
 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO. PR - 1994  
 REPLACES

CHARACTERISTICS	ELECTRICAL DATA	DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:	DRAWN	VK	27 NOV 07	<b>Honeywell</b> THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL. INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY.	TITLE	DRAWING NAME	REV
			CHECK	RJ	27 NOV 07				
OPERATING FORCE - - - - - 3 - 5 OZ	CONTACT ARRANGEMENT S P D T	NO PLACE .X ±	0.030			B I - .006 LB MAX 1 OF 1	11SM601-H4	9	9
RELEASE FORCE - - - - - 1 OZ MIN	30 VOLTS DC RATING	ONE PLACE .X ±	0.015						
DIFFERENTIAL TRAVEL - - - .004 MAX	INDUCTIVE	TWO PLACE .XX ±	0.005						
OVERTRAVEL - - - - - .005 MIN	RESISTIVE	THREE PLACE .XXX ±							
	MAXIMUM INRUSH	FOUR PLACE .XXXX ±							
	APPROVALS	ANGLES ±	RASTER						