

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PINEBROOK, ILLINOIS

FED. MFR. CODE 91929

SWITCH-BASIC

CATALOG LISTING

ISEI-3

(M) ISEI-3
ISSUE 6

ISEI-3
PAGE 1 OF 1

M

DRAWING NUMBER

ISSUE 11

RELEASE NO.

CHECK

REVISIONS

A	CO16449
D A W 28, DEC 61	
B	CO-34213
J A L 24 SEPT 74	
C	CO 51463-D
WJM 16 JUL 82	
D	CO-570414
CJH 21 MAR 85	
E	CO94274
DLM MAR 99	

CHECK

CHECK

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK

CHECK

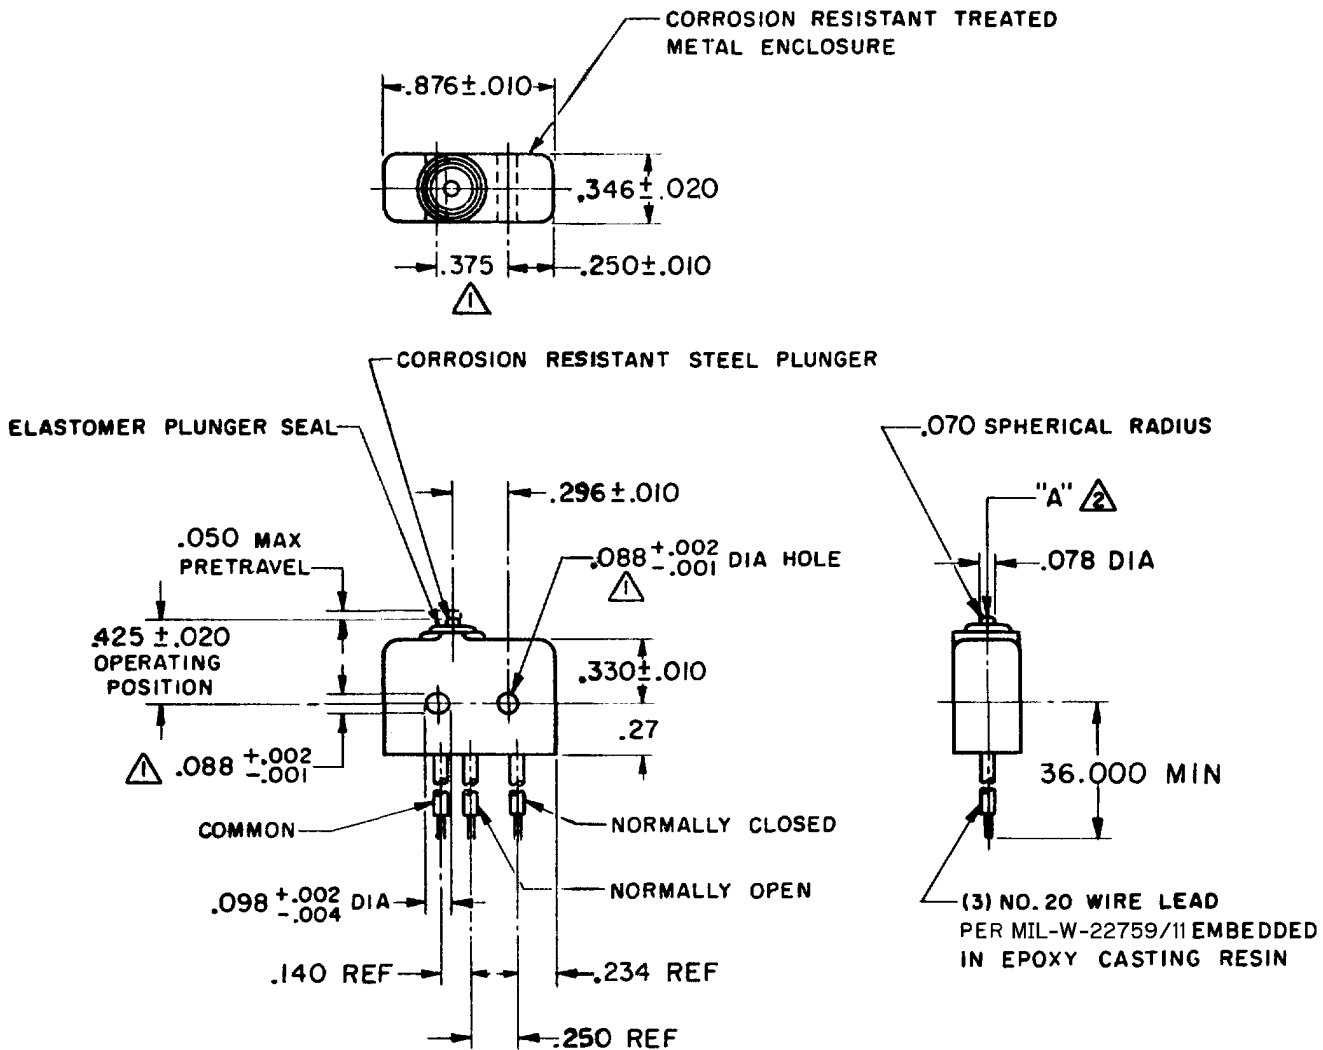

NOTE -

- ▲ MOUNTING HOLES WILL ACCEPT .087 MAX DIA PINS OR SCREWS ON $.375 \pm .002$ CENTERS
- ▲ ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
- ▲ WEIGHT OF SWITCH ONLY IS .26 OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS 1.40 OZ MAX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 5-17 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE ----- 4 OZ MIN	250 VAC ----- 5 AMP	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.018 THREE PLACE (.000) ±.008 ANGLES ±
RELEASE TRAVEL ----- .004 MIN	30 VOLTS DC RATING	
DIFFERENTIAL TRAVEL ----- .004 MAX	INDUCTIVE ----- SEA LEVEL ----- 3 AMP	
OVERTRAVEL ----- .003 MIN	RESISTIVE ----- SEA LEVEL ----- 5 AMP	
	MAXIMUM INRUSH ----- 50,000 FT ----- 5 AMP	
	MAXIMUM INRUSH ----- 24 AMP	WEIGHT ▲ 3

FORMTEK

0-90376

DRAWN

D A W

28, DEC 61