

MICRO SWITCH

FREERPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

IXE201

MS-27994-4

IXE201

M

DRAWING NUMBER

2

ISSUE

REPLACES

RELEASE NO. PR-11966

CHECK

REVISIONS

A CO 57328-A
WJM
17 APR 85

CHECK

10 MAR 83


CHECK

7 MAR 83

CHECK


WJM

FO-52848-A

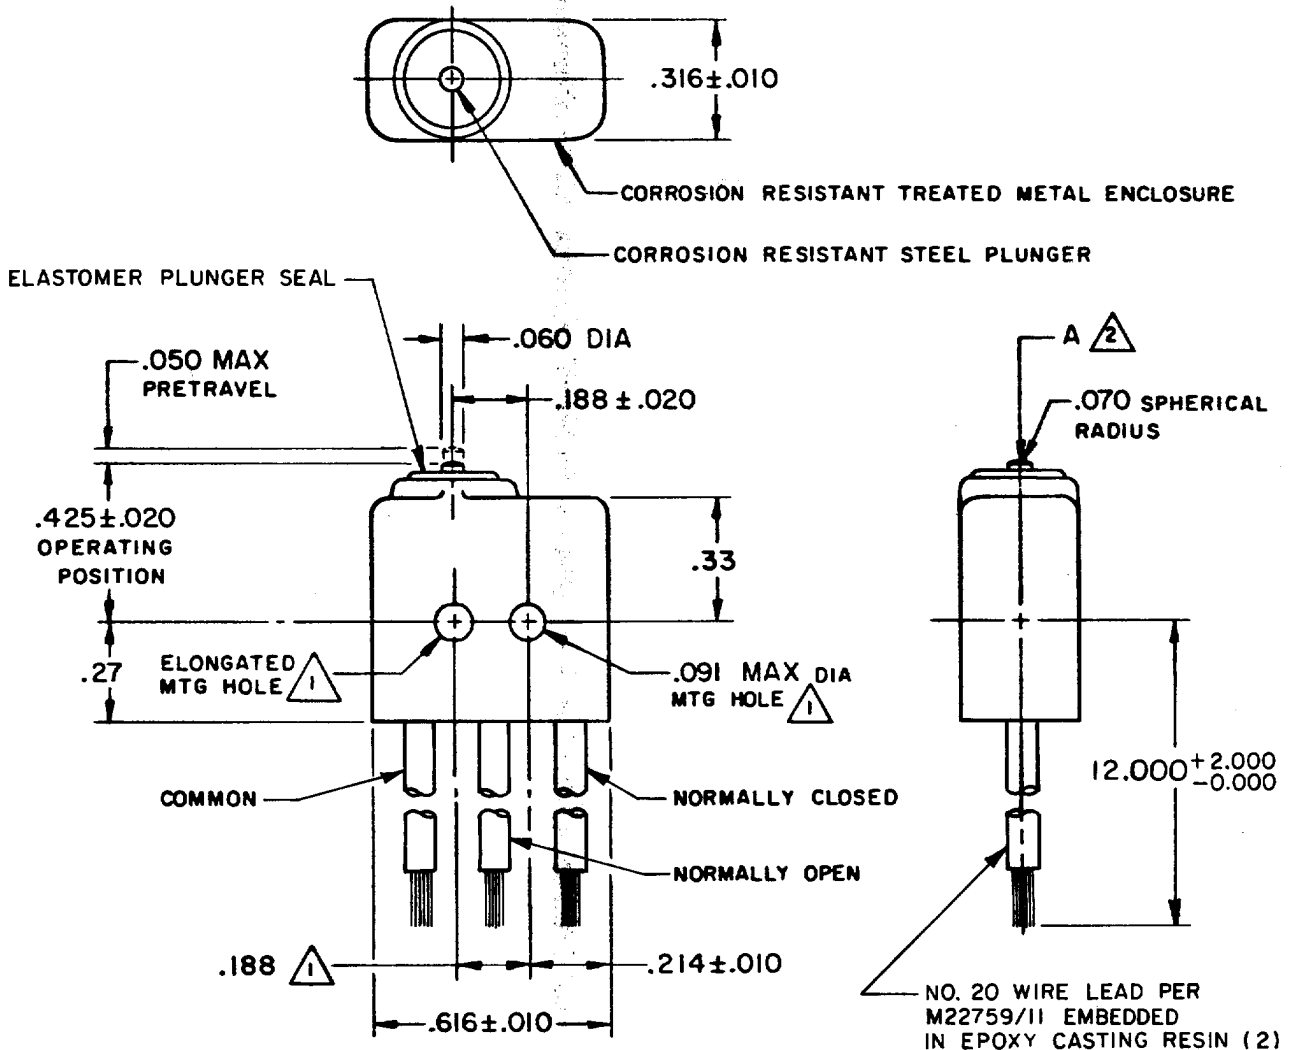

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ----- 5-17 OZ
RELEASE FORCE ----- 4 OZ MIN
RELEASE TRAVEL ----- .004 MIN
DIFFERENTIAL TRAVEL ----- .005 MAX
OVERTRAVEL ----- .004 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

28 VOLTS DC RATING
INDUCTIVE ----- SEA LEVEL ----- 4 AMP
50,000 FT ----- 2.5 AMP
RESISTIVE ----- SEA LEVEL ----- 7 AMP
50,000 FT ----- 7 AMP
LAMP ----- SEA LEVEL ----- 1 AMP
MOTOR ----- SEA LEVEL ----- 2.5 AMP
115 VOLTS 400 CYCLES ----- SEA LEVEL
RESISTIVE ----- 7 AMP
INDUCTIVE ----- 4 AMP
LAMP ----- 1 AMP
MOTOR ----- 1.5 AMP

SCALE 2:1

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/64	X	0.003
ONE PLACE	X, X	0.4/0.16	X, X	0.38/0.15
TWO PLACES	X, XX	0.15/0.06	X, XX	0.13/0.05
THREE PLACES	X, XX		X, XX	
ANGLES				

DESIGN UNITS SI METRIC US CUSTOMARY

WEIGHT (3)