

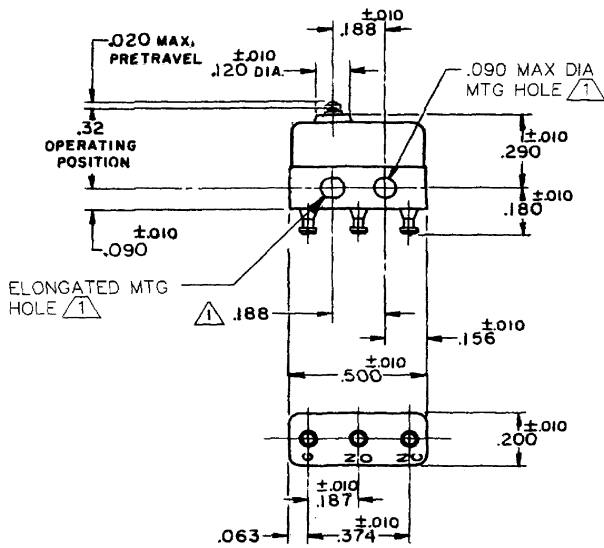


FO-55111-A

HONEYWELL
PART NUMBER
21SX1-T
PRODUCT CODE
VDM0150

REV	DOCUMENT	CHANGED BY	CHECK
9	0038449	VS 28APR08	BLR



- NOTES**
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA. ON .188±.002 CENTERS
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO. SR - 8416
REPLACES -

CHARACTERISTICS	
OPERATING FORCE	5 OZ MAX
RELEASE FORCE	1 OZ MIN
DIFFERENTIAL TRAVEL	.005 MAX
OVERTRAVEL	.004 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT S.P.D.T.	BREAK DISTANCE .010 MIN
28 VOLTS DC RATING	
SEA LEVEL	50,000 FT
INDUCTIVE	4 AMP 2.5 AMP
RESISTIVE	7 AMP 7 AMP
MAXIMUM INRUSH 24 AMP	
KEMA CE	7A 250V~ T125 5E4
UL CSA	7A 250 VAC

DESIGN UNITS: INCH	
TOLERANCES UNLESS NOTED:	
NO PLACE	X ±
ONE PLACE	.X ±
TWO PLACE	.XX ±
THREE PLACE	.XXX ±
FOUR PLACE	.XXXX ±
ANGLES	±

DRAWN	SPK	20FEB08
CHECK	RJ	20FEB08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	21SX1-T	9
SCALE	-	WEIGHT:.003 LB MAX	SHEET 1 OF 1

4

3

↑

2

1