
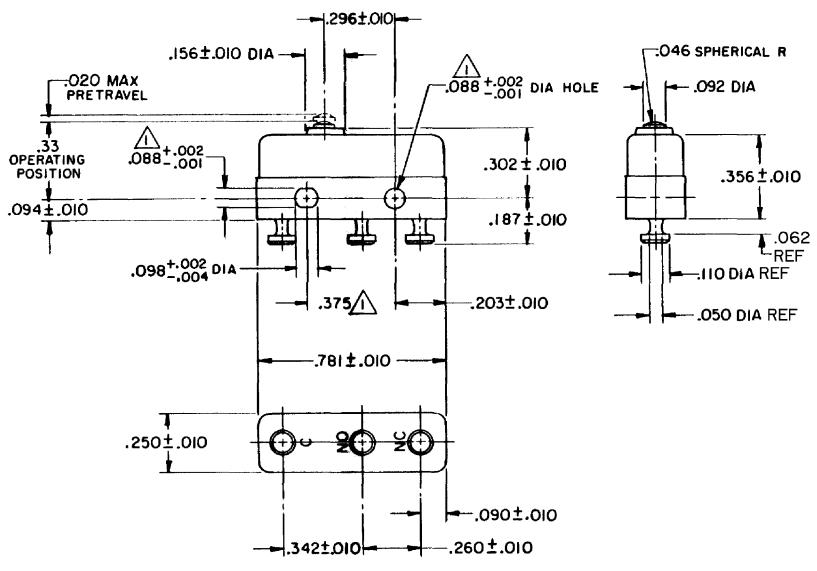


FO-55111-A

HONEYWELL
PART NUMBER
22SM22-T
PRODUCT CODE
TXP2260

REV	DOCUMENT	CHANGED BY	CHECK
10	0038111	PK 20MAY08	ASD



NOTE -
 ▲ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
 2 - TERMINALS ARE PLATED FOR SOLDERING
 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO.	-
REPLACES	-

CHARACTERISTICS	ELECTRICAL DATA	DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:	DRAWN	VK	19 OCT 07	Honeywell TITLE SWITCH - BASIC
			CHECK	RJ	19 OCT 07	
OPERATING FORCE - - - - 3 - 5 OZ	CONTACT ARRANGEMENT S P D T	NO PLACE .X ±	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY
RELEASE FORCE - - - - 1 OZ MIN	30 VOLTS DC RATING	ONE PLACE .X ±	DRAWING NAME 22SM22-T			
DIFFERENTIAL TRAVEL - - - .004 MAX	INDUCTIVE	TWO PLACE .XX ±	SIZE B			
OVERTRAVEL - - - - .005 MIN	RESISTIVE	THREE PLACE .XXX ±	TYPE I			
	MAXIMUM INRUSH	FOUR PLACE .XXXX ±	DRAWING NAME 22SM22-T			
	APPROVALS	ANGLES ±	REV 10			
	KEMA CE	THIRD ANGLE PROJECTION	SCALE -			
	UL CSA		WEIGHT .006 LB MAX			
			SHEET 1 OF 1			