

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
 FREEPORT, ILLINOIS
 FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BA-2RQ1

ABM0500

(M) BA-2RQ1
 ISSUE 4

BA-2RQ1
 PAGE 1 OF 1

M

DRAWING
 NUMBER

ISSUE
 14

REPLACES

RELEASE NO.

18 JAN 06

CHECK

3 MAR 59

CHECK


23 JUN 59

CHECK

59

REVISIONS	
A	CO 9600 R.E.R. MAR 59
B	CO14866 J I D AUG 60
C	CO-34311 J A L 20 JAN 75
D	CO45448 D J W 23 FEB 79
E	CO-77590 S A D 10 JUN 94
F	CO-82133 C S L 26 JUL 96
G	CO-92159 C S L 21 JAN 98
H	CO93346 D L T 25 AUG 98
J	CO-94212-C D L T 20 SEP 99
K	0018387 T S G 18 JAN 06

FORMTEK
 DRAWN
 R. E. R. 2 FEB 59

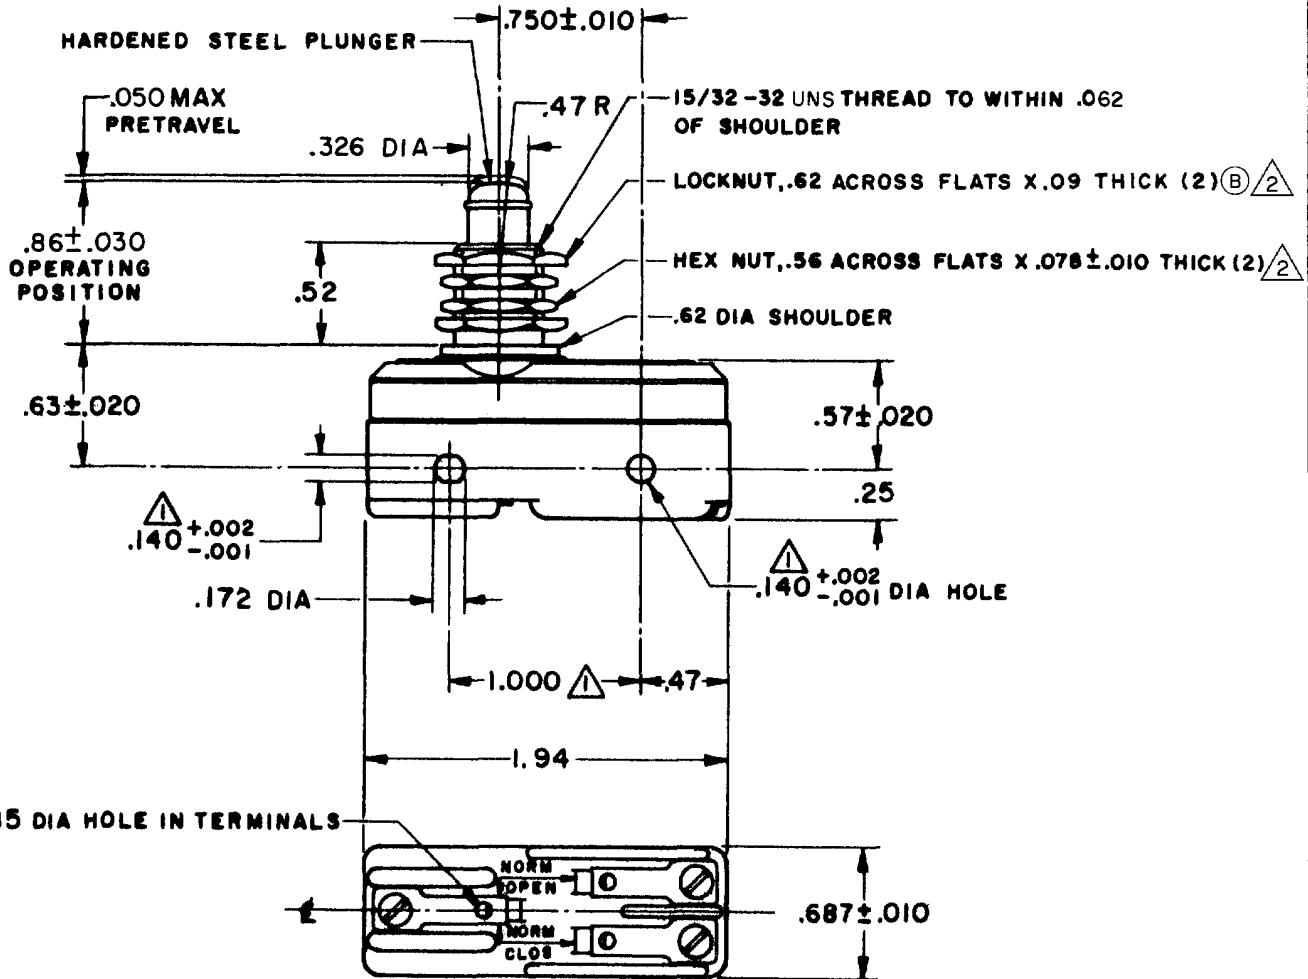

NOTES

- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS
- ② HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 14-22 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE ----- 10 OZ MIN	L23 20A 125, 250 OR 480 VAC 10A 125 VAC "L"	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL ----- .002-.0075	1HP 125 VAC, 2HP 250 VAC	TOLERANCES ARE:
OVERTRAVEL ----- .219 MIN	L288 1/2A 125 VDC, 1/4A 250 VDC	ONE PLACE (.0) ±.030
	L308	TWO PLACE (.00) ±.015
	L315	THREE PLACE (.000) ±.005
	20(3)A 250V ~ T85 5E4	ANGLES ±
		WEIGHT .080 LB