**MICRO SWITCH**
FREEPORT ILLINOIS. U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

# SWITCH – BASIC

CATALOG LISTING
**BA-2RV191-A2**

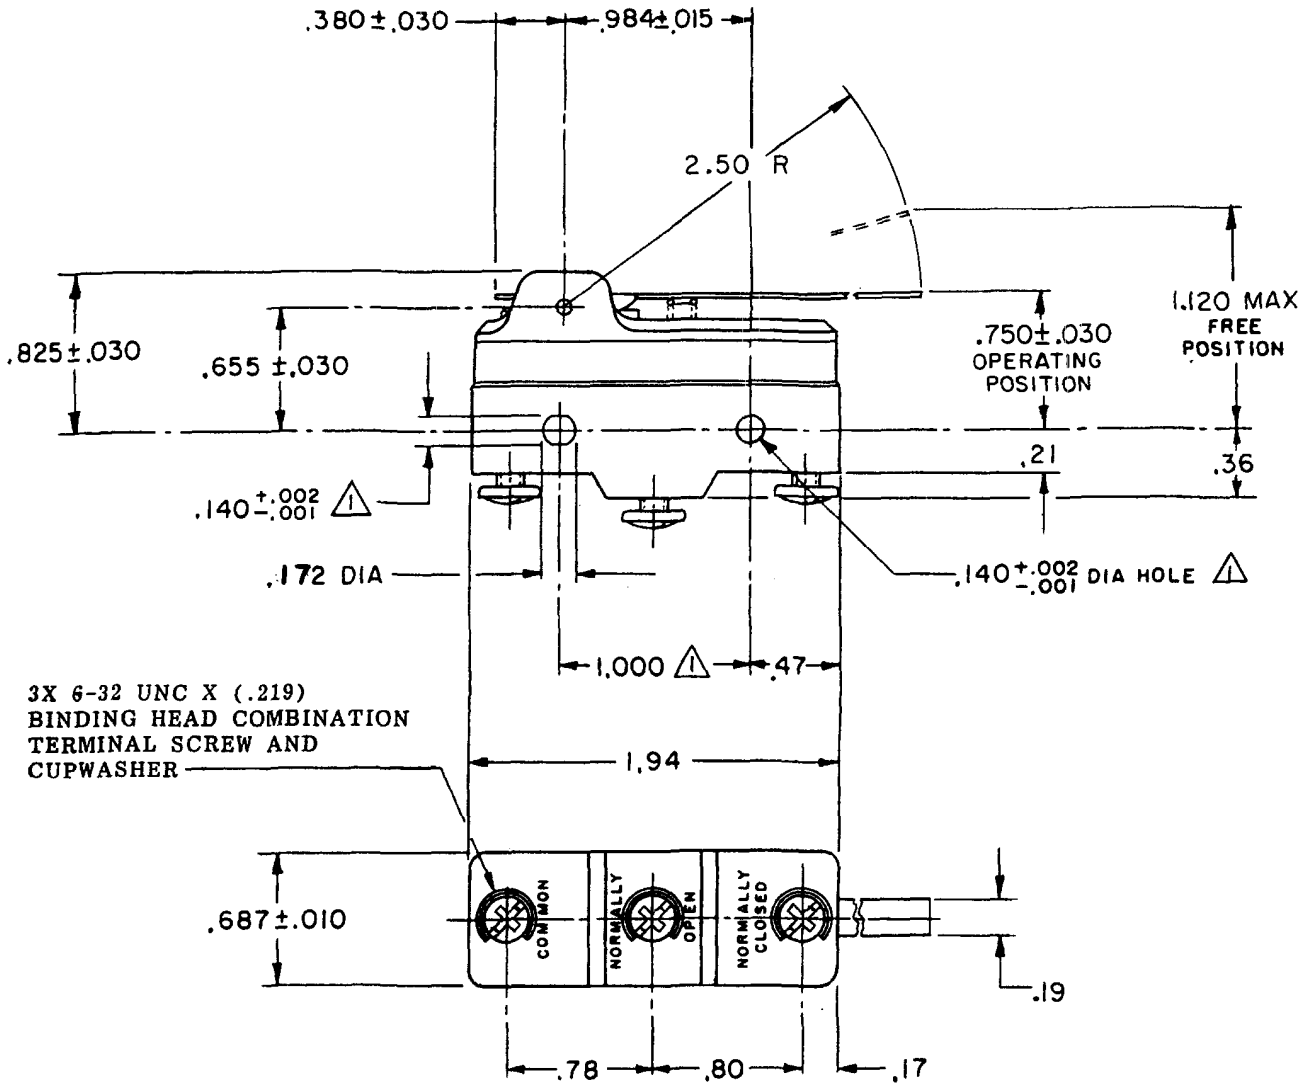


NOTE –
⚠ – MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ±.002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

## CHARACTERISTICS

OPERATING FORCE – – – – 10 OZ MAX
RELEASE FORCE – – – – 3 1/4 OZ MIN
PRETRAVEL – – – – – – – – .400 MAX
DIFFERENTIAL TRAVEL – – – .070 MAX
OVERTRAVEL – – – – – – – – .050 MIN

## ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

UL LISTED – FILE E12252
20A–125, 250 OR 480 VAC; 10A–125 VAC "L"
1HP–125 VAC; 2HP–250 VAC
CODE L23 1/2A-125 VDC; 1/4A-250 VDC

L288
L299
L308

20(3)A 250V ~ T85 5E4

SCALE FULL
DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED. TOLERANCES ARE ±

| | DIM. mm | TOL. mm/in | DIM. in | TOL. mm/in |
|---|---|---|---|---|
| NO PLACES | X | 1/.04 | | |
| ONE PLACE | X.X | 0.4/.016 | X X | 0.8/.03 |
| TWO PLACES | X.XX | 0.15/.006 | X.XX | 0.38/.015 |
| THREE PLACES | | | X.XXX | 0.13/.005 |
| ANGLES | | | | |

DESIGN UNITS: SI METRIC ☐ US CUSTOMARY ☒

WEIGHT .065 LB

M BA-2RV191-A2 PAGE 1 OF 1
RELEASE NO. PR-6208 REPLACES
DRAWING NUMBER
ISSUE 7

REVISIONS

| | | |
|---|---|---|
| A | CO 38387 | K S W 5 MAR 77 |
| B | CO 45511 | T M M 19 FEB 79 |
| C | CO-73287-J | J A L 22 NOV 93 |
| D | CO 77590 | SAD 9 JUN 94 |
| E | CO-82886 | JALA 23 APR 96 |
| F | C093346 | DLT 26 AUG 98 |

CHECK 30 NOV 76 CE8 CHECK CHECK 76 NOV 24 DRAWN
FORMTEK FO-52848-A

Downloaded from Elcodis.com electronic components distributor