

MICRO SWITCH

FREEMONT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL


FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-2R244-A2

M BZ-2R244-A2
 PAGE 1 OF 1
 RELEASE NO. PR-1007
 REPLACES
 DRAWING NUMBER
4
 ISSUE
 REVISIONS
 A CO-173287-J JAL 22 NOV 93
 B C093346 DLT 28 AUG 98
 C 0007223 AS 18AUG04
 CHECK 18AUG04 AK
 CHECK 17 Dec 69
 CHECK LSD
 CHECK 8 DEC 69
 DRAWN GCH
 FO-50378-1A
 FORMTEK

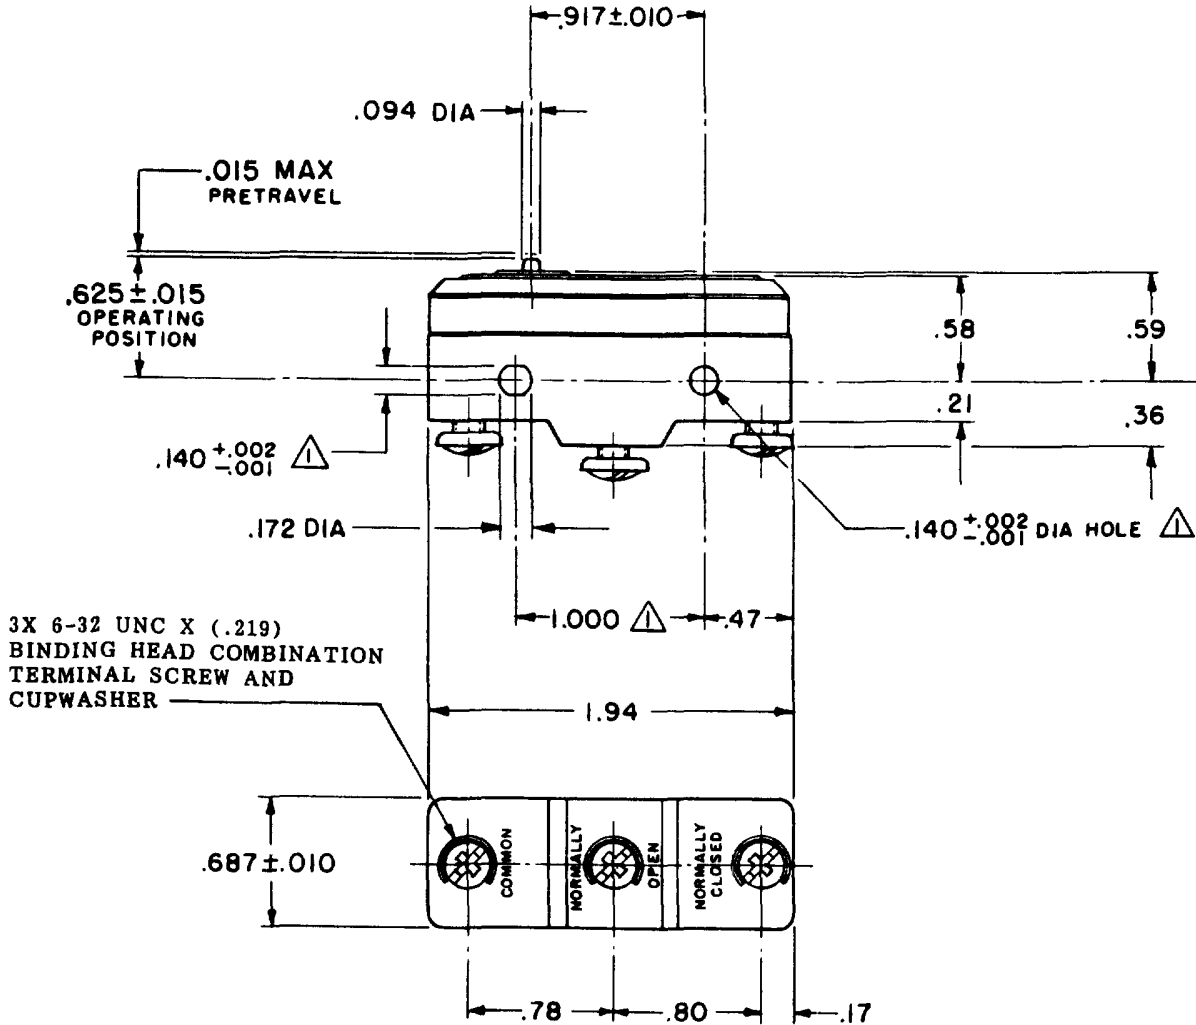

NOTES

- △ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - SWITCH WILL WITHSTAND TEMPERATURE OF 400° F FOR 100 HOURS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

| CHARACTERISTICS | ELECTRICAL DATA | SCALE FULL |
|---------------------------------------|--|--|
| OPERATING FORCE ----- 9 - 13 OZ | CONTACT ARRANGEMENT S P D T | DO NOT SCALE PRINT |
| RELEASE FORCE ----- 4 OZ MIN | UNDERWRITERS' LAB. INC. LISTED RATING 5 A-125, 250 OR 480 VAC -L35- 1/2 A-125 VDC; 1/4 A-250 VDC | UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES |
| DIFFERENTIAL TRAVEL --- .0004 - .0020 | -L288- | TOLERANCES ARE: |
| OVERTRAVEL ----- .005 MIN | | ONE PLACE (.0) ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .005 ANGLES ± |
| | | WEIGHT .063 LB |