MICRO SWITCH
A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS
FED. MFR. CODE 91929

SWITCH-BASIC

CATALOG LISTING
BZ-3RQ115T

(M) BZ-3RQ115T ISSUE 1

M BZ-3RQ115T PAGE 1 OF 1

REPLACES | RELEASE NO. | DRAWING NUMBER | ISSUE 7 | CHECK

REVISIONS

A	C014866	M B F 14 OCT 60
B	C032184	G L H 20 JUN 73
C	CO-89351-0	J W B 18 JUL 91
D	CO-77589	K D R 29 MAR 94
E	CO-82133	CSL 31 JUL 96
F	C093346	D L T 12 AUG 98

CHECK | CHECK | CHECK | 14 OCT 60

DRAWN | M B F | 14 OCT 60

FORMTEK
FO-50378

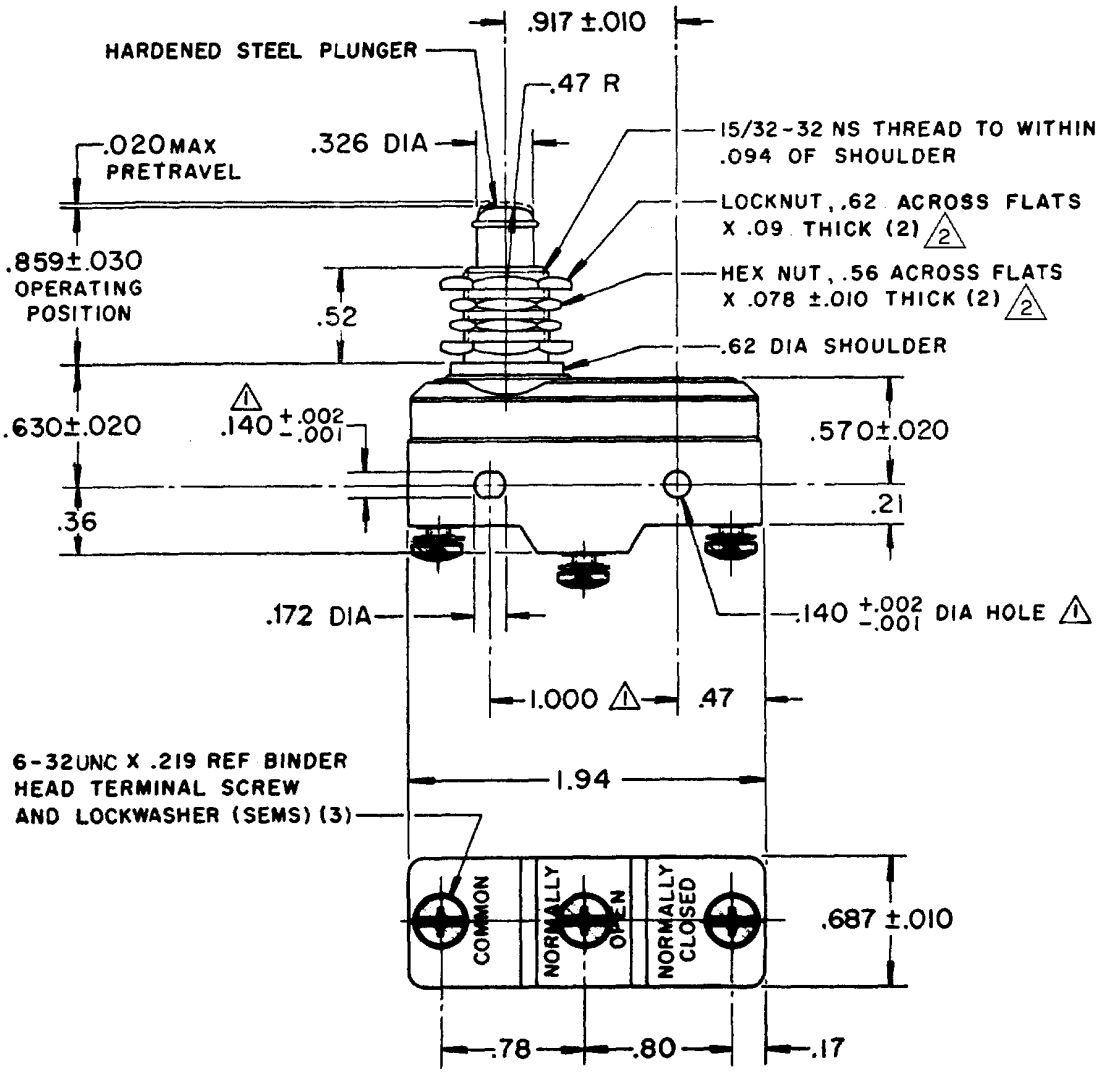

NOTES
1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS
2. HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE	14-20 OZ
RELEASE FORCE	4 OZ MIN
DIFFERENTIAL TRAVEL	.0008-.003
OVERTRAVEL	.219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

UNDERWRITERS' LAB. INC. LISTED RATING
-L9- 10A - 125, 250, OR 480 VAC
1/2A - 125 VDC, 1/4A - 250 VDC
-L 288-

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .093 LB

Downloaded from Elcodis.com electronic components distributor