

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
V7-1A17D8
CW-B0240

CATALOG LISTING
V7-1A17D8

REPLACES X94122-V7

RELEASE NO. PR-17140

ISSUE **M**

ISSUE **4**

CHECK

REVISIONS

A	C066350	JAP	21 SEP 89
B	C069746	WJC	15 MAR 91
C	C074430	DHD	24 FEB 93

CHECK


28 FEB 89

J A P


CHECK

27 FEB 89

DDM/CAD
DRAWN

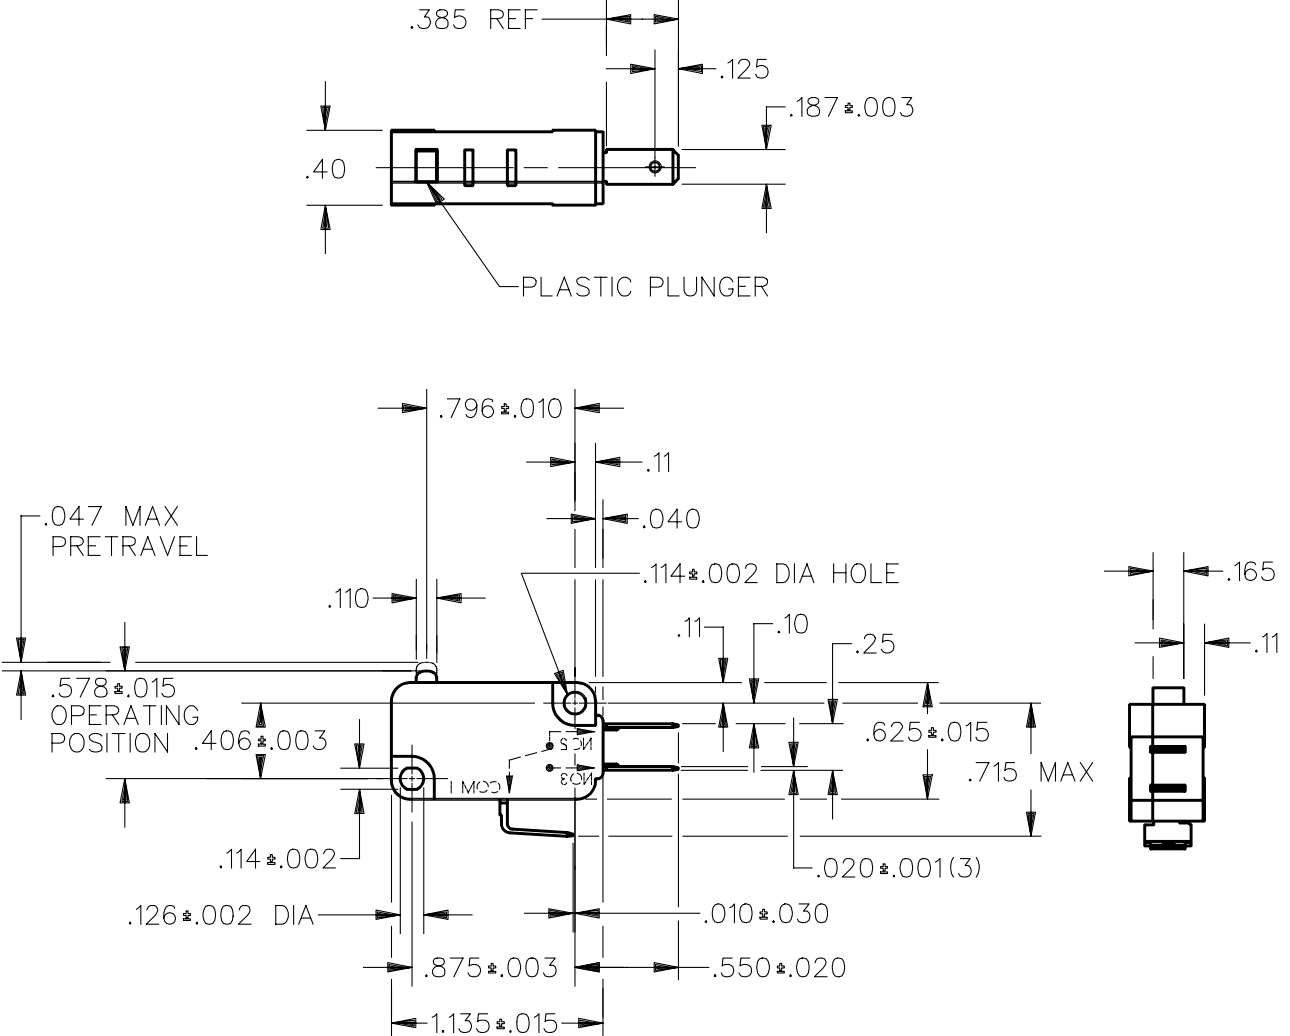

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS	ELECTRICAL DATA	SCALE	FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 150 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
RELEASE FORCE — — — 25 GRAMS MIN	L162 5A 125, <u>250</u> , 277 VAC 1/10 HP <u>250</u> VAC	ONE PLACE (.0)	± .030	
DIFFERENTIAL TRAVEL — — .002—.010		TWO PLACE (.00)	± .015	
OVERTRAVEL — — — — .050 MIN		THREE PLACE (.000)	± .005	
FREE POSITION — — — — .625 MAX		ANGLES	±	
RELEASE TRAVEL — — — — .010 MIN		WEIGHT		