

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PROSPERITY, ILLINOIS


FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING

YA-2RBT

CATALOG LISTING
YA-2RBT
 PAGE 1 OF 1
M
 DRAWING NUMBER
8
 ISSUE
 REVISIONS
 A CO34310
 28 DEC 74
 B CO-92159-D
 18 JUL 91
 C CO-77568
 K D R
 29 MAR 91
 D CO-92159
 C S L
 21 JAN 98
 E CO93346
 D L T
 27 AUG 98
 F CO-95750-B
 C S L
 29 MAR 00
 G 0000624
 J A H
 23 JUN 03
 RASTER
 DRAWN
 K.A.F. 22 JUNE 56
 CHECK GCH 27 JUNE 56
 CHECK JWH 26 JUNE 81
 CHECK CNT 26 JUNE 82
 RELEASE NO. S.R.5450
 REPLACES

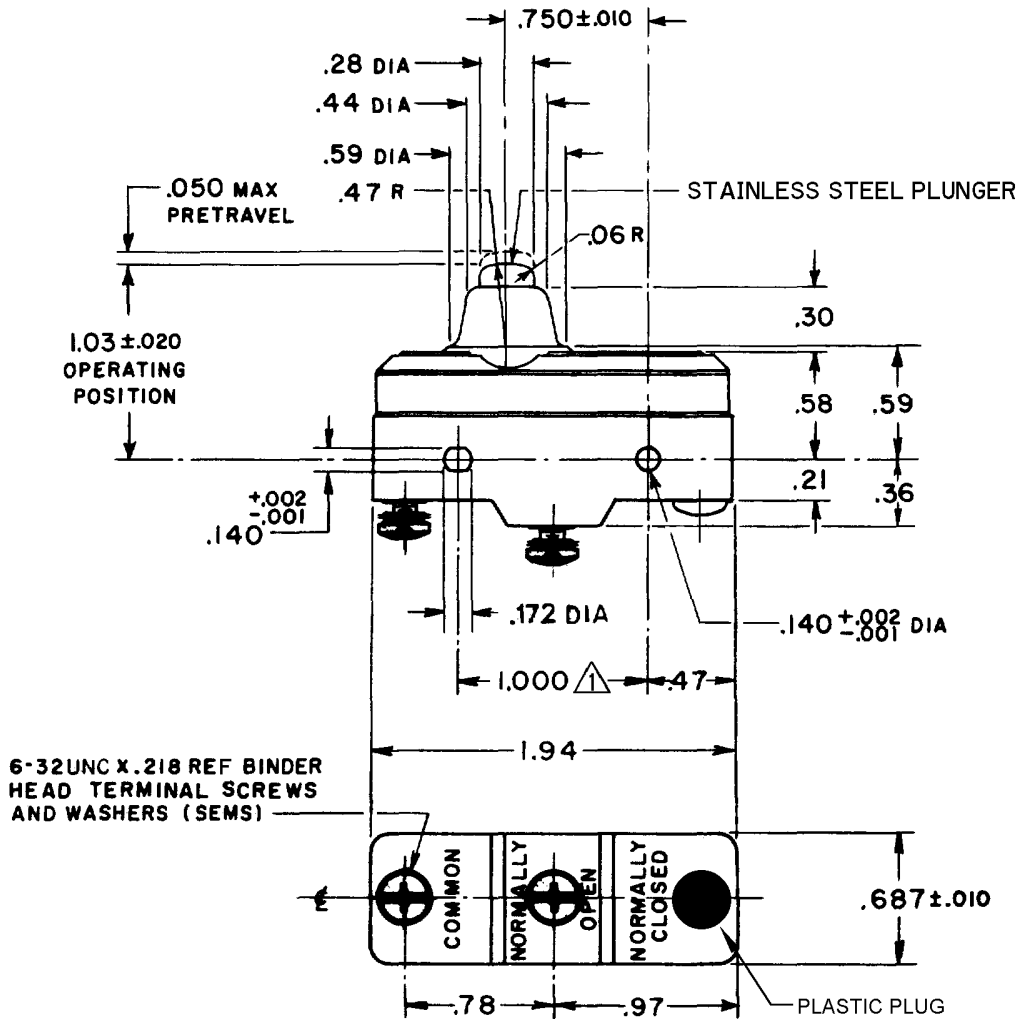

NOTE
 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX. DIA. ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE - FULL
OPERATING FORCE - - - - - 14 - 22 OZ.	CONTACT ARRANGEMENT S.P.N.O.	DO NOT SCALE PRINT
RELEASE FORCE - - - - - 10 OZ. MIN.	L23 20A 125, 250 OR 480 VAC 10A 125 VAC "L"	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL - - - .002 - .0075	1HP 125 VAC, 2HP 250 VAC 1/2A 125 VDC, 1/4A 250 VDC	TOLERANCES ARE:
OVERTRAVEL - - - - - .094 MIN.	L288 L299 L308	ONE PLACE (.0) ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .005 ANGLES ±
	CE D RL 20(3)A 250V ~ T85 5E4	WEIGHT .064 LB.