
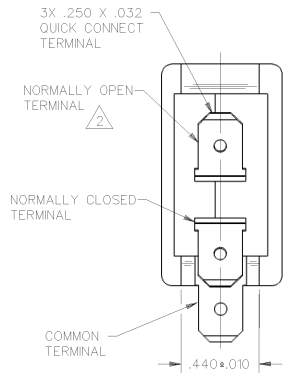


**MICRO SWITCH**  
a Honeywell Division  
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING  
**1DM176**



THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION  
SCALE 2 TO 1  
DO NOT SCALE PRINT

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE - - - - - 15 OZ MAX	CONTACT ARRANGEMENT
RELEASE FORCE - - - - - 3 OZ MIN	S P D T
DIFFERENTIAL TRAVEL - - .045 APPROX	L213
OVERTRAVEL - - - - - .375 MIN	10A 1/2HP 125, 250, OR 277 VAC
PLUNGER FORCE - - - - - 21 OZ MAX (AT .120 OVERTRAVEL)	2A 480 VAC

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
ONE PLACE (1.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ± 5°
WEIGHT

- NOTES
- 1 - GRAY PLASTIC CASE AND PLUNGER
  - 2 - FLAG STYLE QUICK CONNECT RECEPTACLE REQUIRED FOR NORMALLY OPEN TERMINAL IF SWITCH IS WIRED BEFORE MOUNTING
  - 3 - NOMINAL CUTOUT DIMENSION FOR PANELS .045 AND .100 SHOULD BE INTERPOLATED BETWEEN 1.115 AND 1.125
  - 4 - PUSH TO OPERATE - MOMENTARY

ANSI Y14.5M-1982 APPLIES

CATALOG LISTING 1DM176  
 ISSUE 3  
 REVISIONS  
 A 15 NOV 92  
 B 14 NOV 92  
 C 15 SEP 94  
 D 05 MAR 93  
 DDN/CAD  
 WJC 14 NOV 92  
 RELEASE NO. PR-16243  
 REPLACES X92486-DM