


DRAWING NUMBER: IISM3-T2
 PAGE 1 OF 1
 ISSUE: 9
 REVISIONS:
 A CO22077 6 CH DEC 66
 B CO29449 SRH 23 FEB 72
 C CO-82803-B CSL 6 SEP 96
 D CO-95172 JJA 23 JUNE 99
 E CO-95691 GJW 3 DEC 99
 FORMTEK DRAWN: GCH 6 DEC 66
 CHECK: LSD 21 DEC 66
 REPLACES: _____
 RELEASE NO.: _____

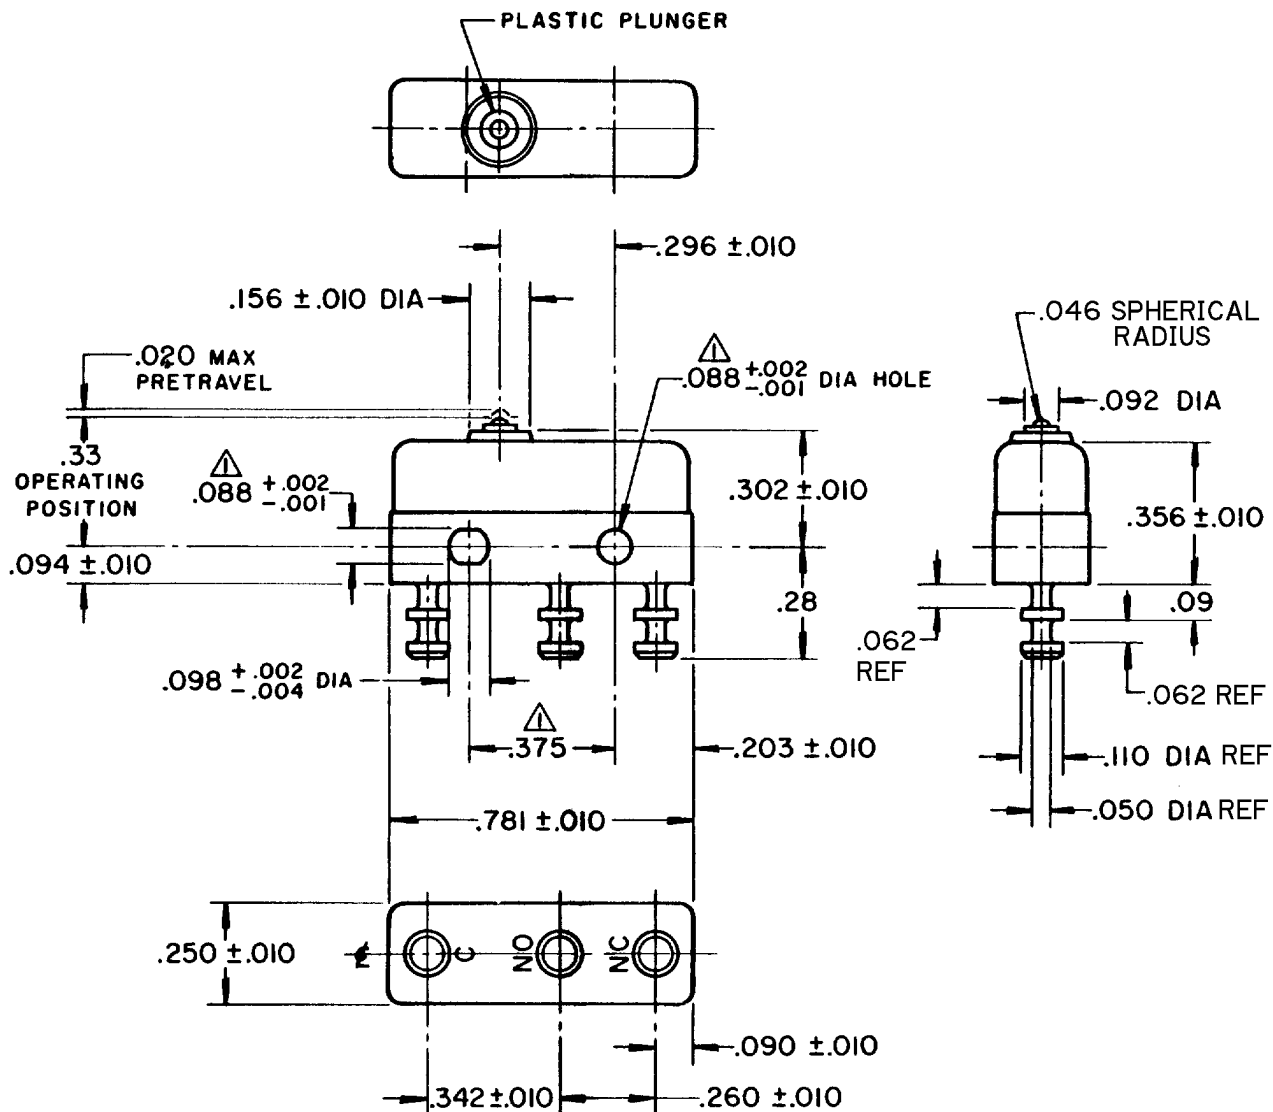

NOTE -
 ▲ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ±.002 CENTERS
 2 - TERMINALS ARE PLATED FOR SOLDERING
 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 3 - 5 OZ
 RELEASE FORCE ----- 1 OZ MIN
 DIFFERENTIAL TRAVEL ----- .004 MAX
 OVERTRAVEL ----- .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
 S P D T

30 VOLTS DC RATING

INDUCTIVE ----- SEA LEVEL ----- 3 AMP
 50,000 FT ----- 2.5 AMP

RESISTIVE ----- SEA LEVEL ----- 5 AMP
 50,000 FT ----- 5 AMP

MAXIMUM INRUSH ----- 24 AMP

SCALE 2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030
 TWO PLACE (.00) ±.015
 THREE PLACE (.000) ±.005
 ANGLES ±

WEIGHT .006 LB MAX



UNDERWRITERS' LAB. INC. LISTED RATING
 5 A - 250 VAC