


C&K T Series Subminiature Toggle Switches

Features/Benefits

- Compact size—small footprint
- Single and double pole models
- PC and panel mount options available

Typical Applications

- Hand-held telecommunications
- Instrumentation
- Medical equipment

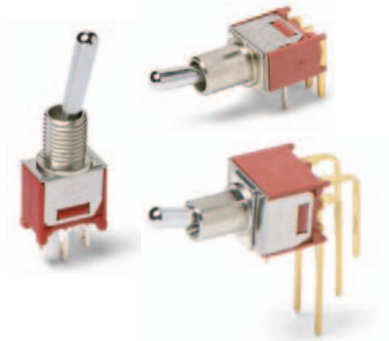

Models Available

Specifications

CONTACT RATING: B contact material: 0.4 VA max. @ 20 V AC or DC max. Q contact material (TX01 models): 3 AMPS @ 120 V AC or 28 V DC. All other models: 2 AMPS @ 120 V AC or 28 V DC. See page F-38 for additional ratings.

ELECTRICAL LIFE: TX01 models: 60,000 make-and-break cycles at full load. All other models: 30,000 cycles.

CONTACT RESISTANCE: Below 20 m Ω typ. initial @ 2-4 V DC, 100 mA, for both silver and gold plated contacts.

INSULATION RESISTANCE: 10⁹ Ω min.

DIELECTRIC STRENGTH: 1000 Vrms min. @ sea level.

OPERATING TEMPERATURE: -30°C to 85°C.

SOLDERABILITY: Per MIL-STD-202F method 208D, or EIA RS-186E method 9 (1 hour steam aging).

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Materials

CASE: Glass filled nylon 6/6, flame retardant, heat stabilized or diallyl phthalate (DAP), (UL 94V-0).

ACTUATOR: Brass, chrome plated.

BUSHING: Brass, nickel plated.

HOUSING: Stainless steel.

SWITCH SUPPORT: Brass, tin plated.

END CONTACTS: B contact material: Copper alloy, with gold plate over nickel plate. Q contact material: Coin silver, silver plated. See above for additional contact materials.

CENTER CONTACTS & TERMINALS: B contact material: Copper alloy, with gold plate over nickel plate. Q contact material: Copper alloy, silver plated. See page F-38 for additional contact materials.


TERMINAL SEAL: Epoxy.

HARDWARE: Nut & Locking Ring: Brass, nickel plated.

Lockwasher: Steel, nickel plated. Additional hardware available separately, see section N.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages F-34 thru F-38. For additional options not shown in catalog, consult Customer Service Center. All models have epoxy terminal seal and are compatible with all "bottom-wash" PCB cleaning methods.

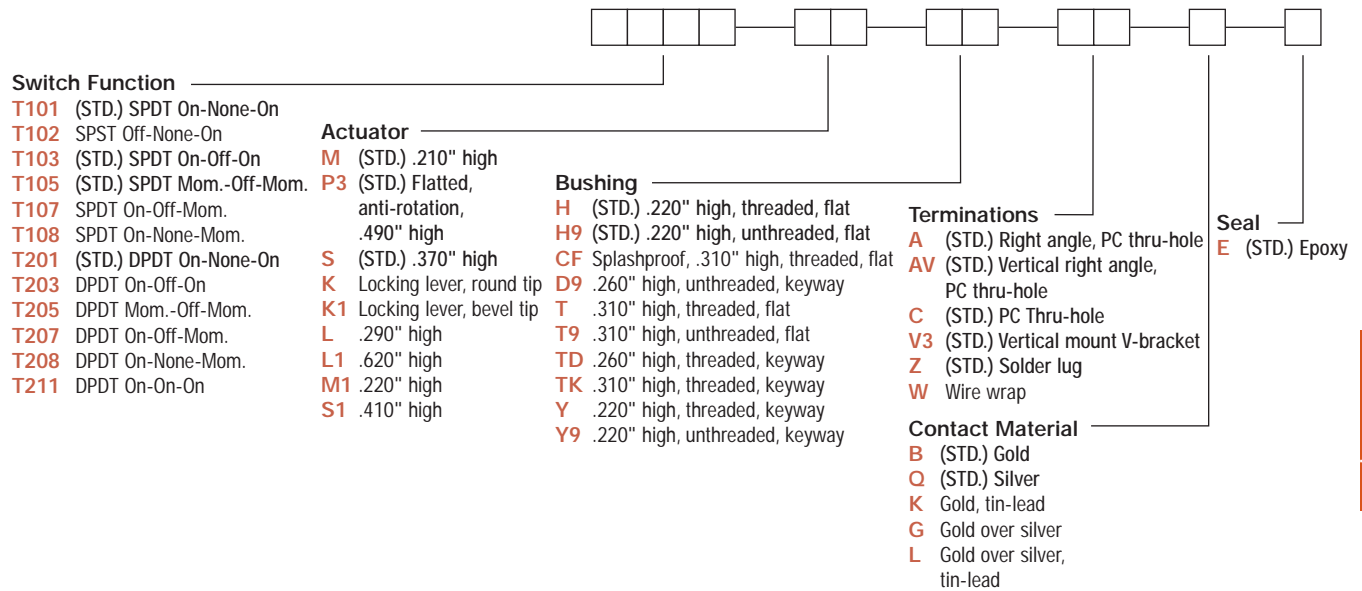


Toggle

C&K T Series Subminiature Toggle Switches


ACTUATOR

M (STD.) .210" HIGH




Standard with A, AV or V3 terminations.

S (STD.) .370" HIGH




Standard with Z, C or W terminations.


M1 .220" HIGH
(with "T" bushing)




S1 .410" HIGH
(with "T" bushing)




L .290" HIGH



L1 .620" HIGH



P3 (STD.) ANTI-ROTATION, FLATTED,
.450" HIGH




1 Actuator shown with standard H bushing. Subtract .040 (1.02) for TD and D9 bushings, subtract .090 (2.29) for T, T9, TK, K9 & CF bushings.

2 Actuators shown with T, T9, TK & CF bushings, add .050 (1.27) for TD and D9 bushings, add .090 (2.29) for H, H9, Y & Y9 bushings.


All actuators have chrome finish (except K & K1).

Available with T & T9 bushings only.
Dress nut part number 709901201
supplied standard with threaded bushing.

K LOCKING LEVER

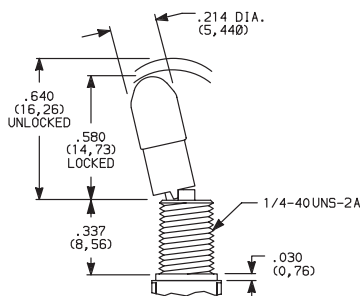


K1 LOCKING LEVER

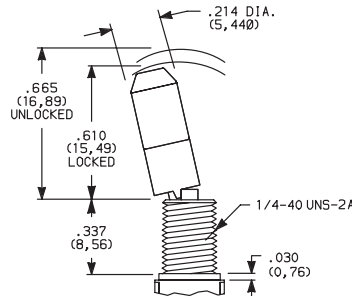

Locking Positions



-01 & -02 Models
2 Position lock



-03 & -11 Models
3 Position lock



-08 Models
1 Position lock

K & K1 actuators have natural aluminum finish.



Keyway on right side. To prevent accidental actuation, toggles must be lifted before being actuated. When released, toggles again lock in place. Overtightening mounting nut may cause actuator to bind.

Not available with CF bushing option.

Bushing option code not required. Not available with TX05 & TX07 models.



BUSHING

H (STD.) .220" HIGH THREADED, FLAT





H standard with C, W & Z terminations.
H9 standard with A, AV & V3 terminations.

Y .220" HIGH THREADED, KEYWAY



T .310" HIGH THREADED, FLAT



Dimensions are shown: IN (mm)
Dimensions subject to change




F

Toggle


C&K T Series Subminiature Toggle Switches

BUSHING


TK .310" HIGH THREADED, KEYWAY




TD .260" HIGH THREADED, KEYWAY



CF SPLASHPROOF, .310" HIGH THREADED, FLAT




IP67 Degree of protection.
Internal o-ring actuator seal and external bushing seal washer standard.
Not available with K locking lever option.




With Standard Locking Ring

PANEL MOUNTING




Without Locking Ring


1/4 IN. BUSHING




Without Locking Ring




Without Locking Ring



Without Locking Ring




With Small Locking Ring




With Standard Locking Ring

TERMINATIONS

Z (STD.) SOLDER LUG

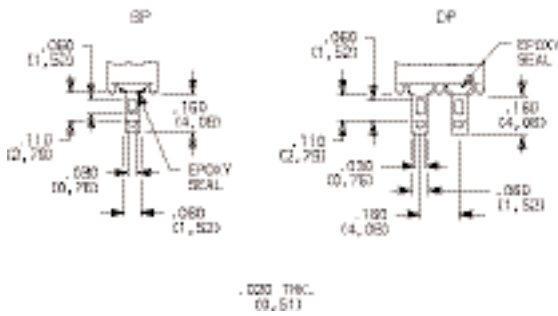

C (STD.) PC THRU-HOLE

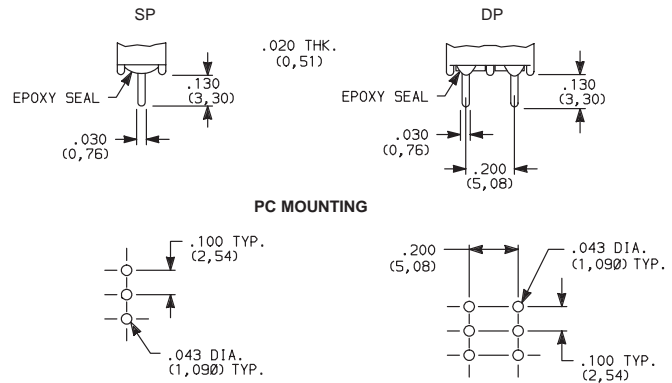

T102 - omit center hole.

W WIRE WRAP




Third Angle Projection
Dimensions are shown: IN (mm)
Dimensions subject to change

www.ittcannon.com

C&K T Series Subminiature Toggle Switches


TERMINATIONS

A (STD.) RIGHT ANGLE, PC THRU-HOLE

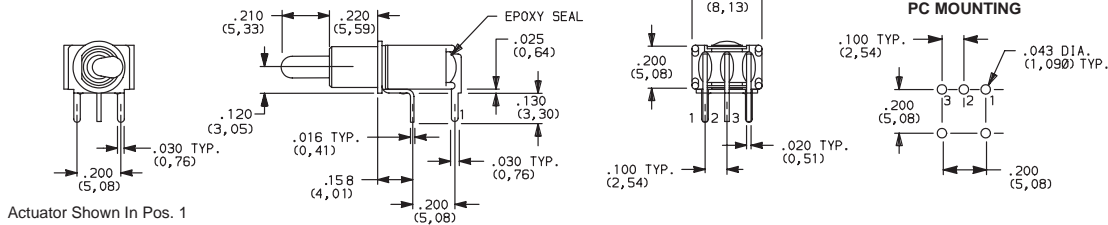


Not available with T102 model.

A (STD.) RIGHT ANGLE, PC THRU-HOLE

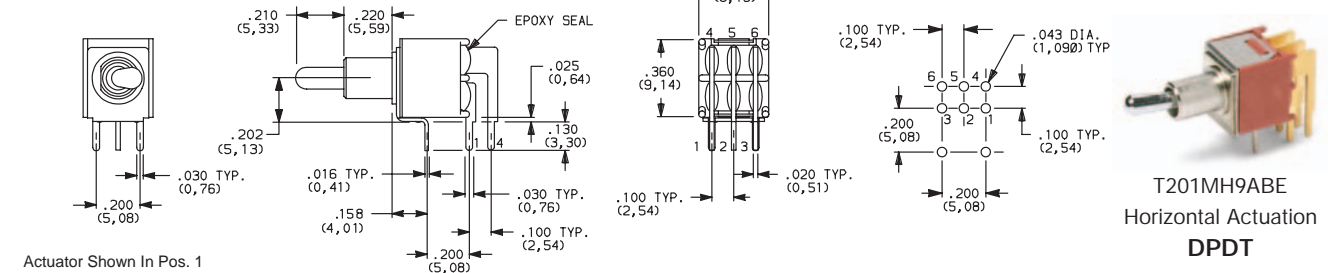


AV (STD.) VERTICAL RIGHT ANGLE, PC THRU-HOLE

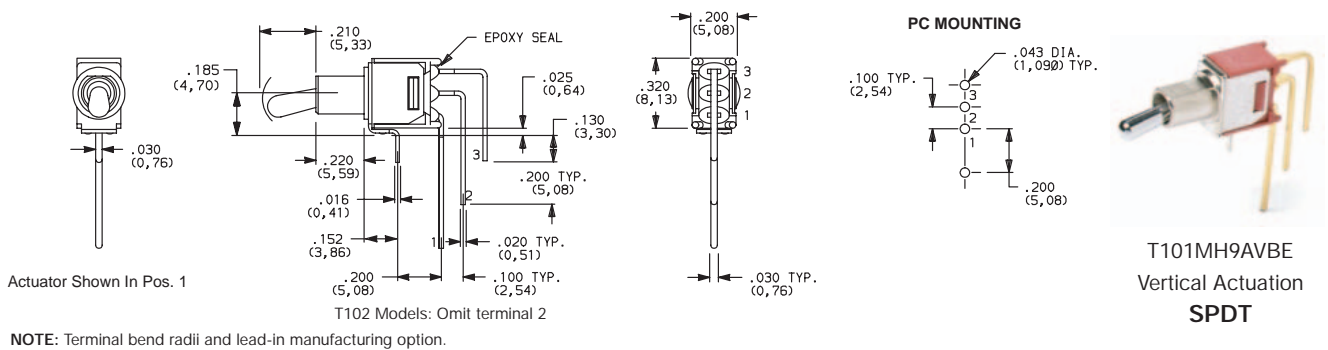



NOTE: Terminal bend radii and lead-in manufacturing option.

AV (STD.) VERTICAL RIGHT ANGLE, PC THRU-HOLE

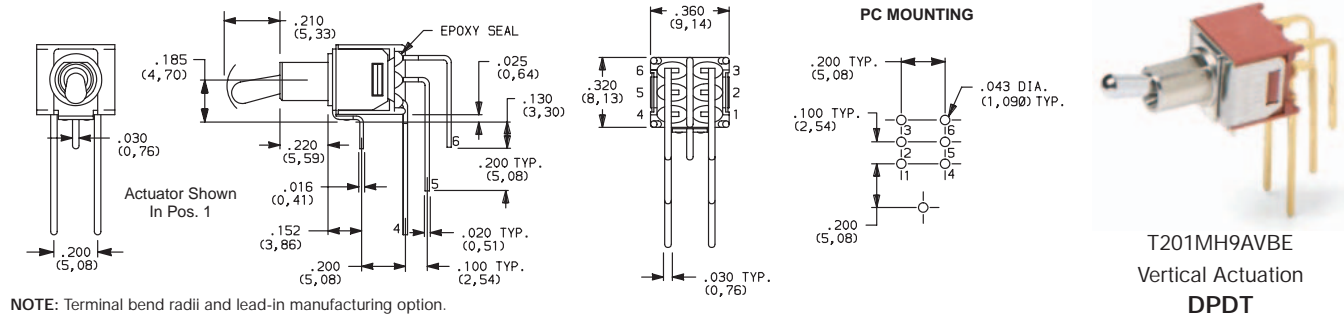

NOTE: Terminal bend radii and lead-in manufacturing option.

V3 (STD.) VERTICAL MOUNT, V-BRACKET

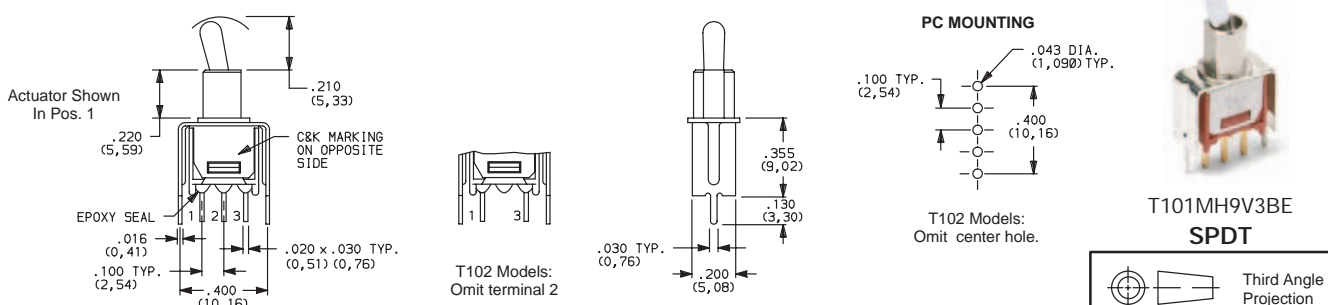

Dimensions are shown: IN (mm)
Dimensions subject to change



F

Toggle

C&K T Series Subminiature Toggle Switches


TERMINATIONS





V3 (STD.) VERTICAL MOUNT, V-BRACKET



T201MH9V3BE
DPDT



Actuator Shown In Pos. 1



CONTACT MATERIAL



OPTION CODE	CONTACT MATERIAL	TERMINAL PLATING	RATINGS	
B (STD.)	GOLD 1	GOLD 1	LOW LEVEL/DRY CIRCUIT	0.4 VA MAX. @ 20 V AC OR DC MAX.
K		TIN-LEAD 6		
Q (STD.)	SILVER 4,5	SILVER 5	POWER	TX01 MODELS: 3 AMPS @ 120 V AC OR 28 V DC. ALL OTHER MODELS: 2 AMPS @ 120 V AC OR 28 V DC.
G	GOLD OVER SILVER 2,3	GOLD 3	LOW LEVEL/DRY CIRCUIT OR POWER	TX01 MODELS: 0.4 VA MAX @ 20 V AC OR DC MAX. OR 3 AMPS @ 120 V AC OR 28 V DC. ALL OTHER MODELS: 0.4 VA MAX @ 20 V AC OR DC MAX. OR 2 AMPS @ 120 V AC OR 28 V DC.
L		TIN-LEAD 6		

CONTACT MATERIAL/APPLICATION RECOMMENDATIONS—SEE SECTION N.


- 1 CONTACTS & TERMINALS: Copper alloy, with gold plate over nickel plate.
- 2 END CONTACTS: Coin silver, with gold plate over nickel plate.
- 3 CENTER CONTACTS & ALL TERMINALS: Copper alloy, with gold plate over nickel plate.
- 4 END CONTACTS: Coin silver, silver plated.
- 5 CENTER CONTACT & ALL TERMINALS: Copper alloy, silver plated.
- 6 TERMINALS: Copper alloy, with tin-lead alloy over nickel plate.

All models with all options when ordered with G, L or Q contact material.
B contact material standard with A, AV, V3 & W terminations.
Q contact material standard with C & Z terminations.

SEAL



E (STD.) EPOXY SEAL



F

Toggle



Dimensions are shown: IN (mm)
Dimensions subject to change