

Accessories

Reflectors BR...

General data Temperature range 50 °C
 Material acrylic






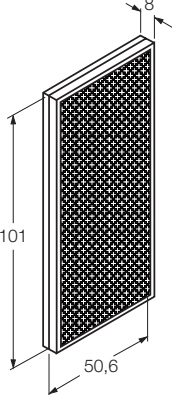
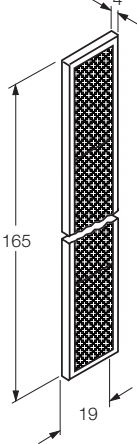





		Dimensions [mm]	Type	Reflectivity factor ¹⁾	Reflectivity surface ¹⁾	Ident number		
Temperature range: 65 °C								
				BRT25 BRT40 BRT75 BRT-84	1 1 1 1,4	0,1 0,3 1 1	37 419 37 420 37 421 30 589 79	
				BRT-42A BRT-42D	1 1	0,4 0,4	30 450 05 30 450 06	
				BRT-25R BRT-50R	1,8 1,8	0,1 0,4	30 498 09 30 498 14	
					BRT-40X18A BRT-53X19A BRT-48X32A BRT-100X18A BRT-100X55A	1,8 1,8 1,8 1,8 1,8	0,14 0,19 0,3 0,34 1	30 449 91 30 449 96 30 449 95 30 449 98 30 450 01
					BRT-40X23B BRT-48X32B BRT46	1,8 1,8 1,8	0,17 0,29 0,5	30 449 92 30 449 99 30 400 71

¹⁾ The reflectivity factor indicates the relative reflectance per surface unit compared to the standard BRT75 reflector.

Accessories

Reflectors BR...

General data Temperature range 50 °C
 Material acrylic

		Dimensions [mm]	Type	Reflectivity factor ¹⁾	Reflectivity surface ²⁾	Ident number			
			BRT-60X40C	1,8	0,45	30 449 97			
			BRT-77X77C	1,8	1,12	30 498 16			
			BRT-92X92C	1,8	1,6	30 498 08			
Temperature range: BRL-20: 65 °C						BRT-40X23	1,8	0,17	30 449 93
BRT-48X32	1,8					0,29	30 449 94		
BRT-100X50	1,8					1	30 450 00		
BRL-20	0,8					0,6	37 422		
Flexible reflectors Adhesive backing Length: 1 m Material: synthetic resin Temperature range: 60 °C				BRF50H	0,7	1 ²⁾	37 210 00		
BRF75H	0,7			1,5 ²⁾	34 124 00				
Temperature range: BRT-23x14CM, BRT-32x20AM: 65 °C					BRT-23X14CM	1,2	0,06	30 589 81	
BRT-32X20AM	1,2				0,13	30 589 82			
BRT-36X40BM	1,2				0,29	30 498 11			

¹⁾ The reflectivity factor indicates the relative reflectance per surface unit compared to the standard BRT75 reflector.

²⁾ Reflectivity surface per 100 mm.