


_					
	SPECIFICATIONS				
CONTACT CARRIER MATERIAL		NYLON or TPU			
	CONTACT MATERIAL/PLATING	BRASS/GOLD			
	HOUSING, LOCKNUT MATERIAL/PLATING	BRASS/NICKEL			
	O-RING MATERIAL	NITRILE			
	RATED CURRENT [A]	4.0 A			
	RATED VOLTAGE [V]	250 V			
	CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS [AWG]		5x22 AWG			
	TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)			
	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68			

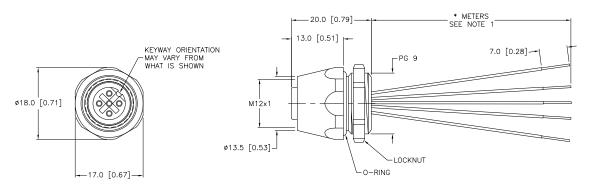

CABLE LENGTH	TOLERANCE			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			

## SOURCE DRAWING - FOR REFERENCE ONLY

## 1. "\*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

	RELATED DOCUMENTS  1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		RCK InC Sensors and Automation Controls	3000 CAMPUS MINNEAPOLIS, MN 1-800-544-7 (763) 553-7 (763) 553-0 turck.com	55441 7769 300 708 fax
	MATERIAL		DRFT JBJ	DATE 02/08/01	DESCRIPTION FK 4.5	= *	
	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	DSGN	SCALE 1=.8	FN 4.0	)—"	
		DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT				
	FINISH				IDENTIFICATION NO.		REV
	CONTACT TURCK FOR MORE		MILLIMETER [ INCH ]				С
360	SEE SPECIFICATIONS	INFORMATION					,
NO.			DO NOT SCALE THIS DRAWING		FILE: 777000189	SHEET	1 OF 1