

	SPECIFICATIONS			
ı	CONTACT CARRIER MATERIAL	NYLON OR TPU		
	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW		
	CONTACT MATERIAL/PLATING	BRASS/GOLD		
	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL		
	RATED CURRENT [A]	2.0 A		
	RATED VOLTAGE [V]	60 VAC/75 VDC		
	OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY		
	CONDUCTOR INSULATION MATERIAL	PVC		
	NUMBER OF CONDUCTORS [AWG]	10x24 AWG		
	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)		
	PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K		


SOURCE DRAWING - FOR REFERENCE ONLY

FILE: 777003373

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com

REV D

SHEET 1 OF 1

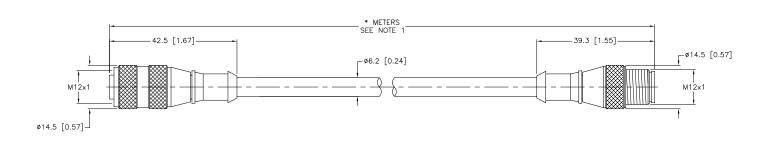

CABLE LENGTH TOLERANCE					
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER TOLERANCE ±0.5mm				
STRIP LENGTH					
0-7mm					
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVFR 100mm	±5.0mm				

NOTES:

1.  $\ensuremath{^{"*"}}$  indicates cable length in meters. Contact Turck to order specific lengths.

D DRAWING PROCESSED AS PART OF ECO 33971
REV DESCRIPTION CBM 04/06/11 33971 BY DATE ECO NO.

RELATED DOCUMENTS  1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology	Sensors and Autom		MINNEA 1-8 (76	CAMI POLIS 300-5 33) 55 33) 55 turck
MATERIAL  SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	DSGN RWC	DATE 04/11/07 SCALE 1=1.0	DESCRIPTION R	K 10T-*-	-RS 1	IOT
FINISH  SEE SPECIFICATIONS	DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		ER [ INCH ]	IDENTIFICATION NO.			

DO NOT SCALE THIS DRAWING