


IF IN DOUBT ASK

General Assembly Drawing

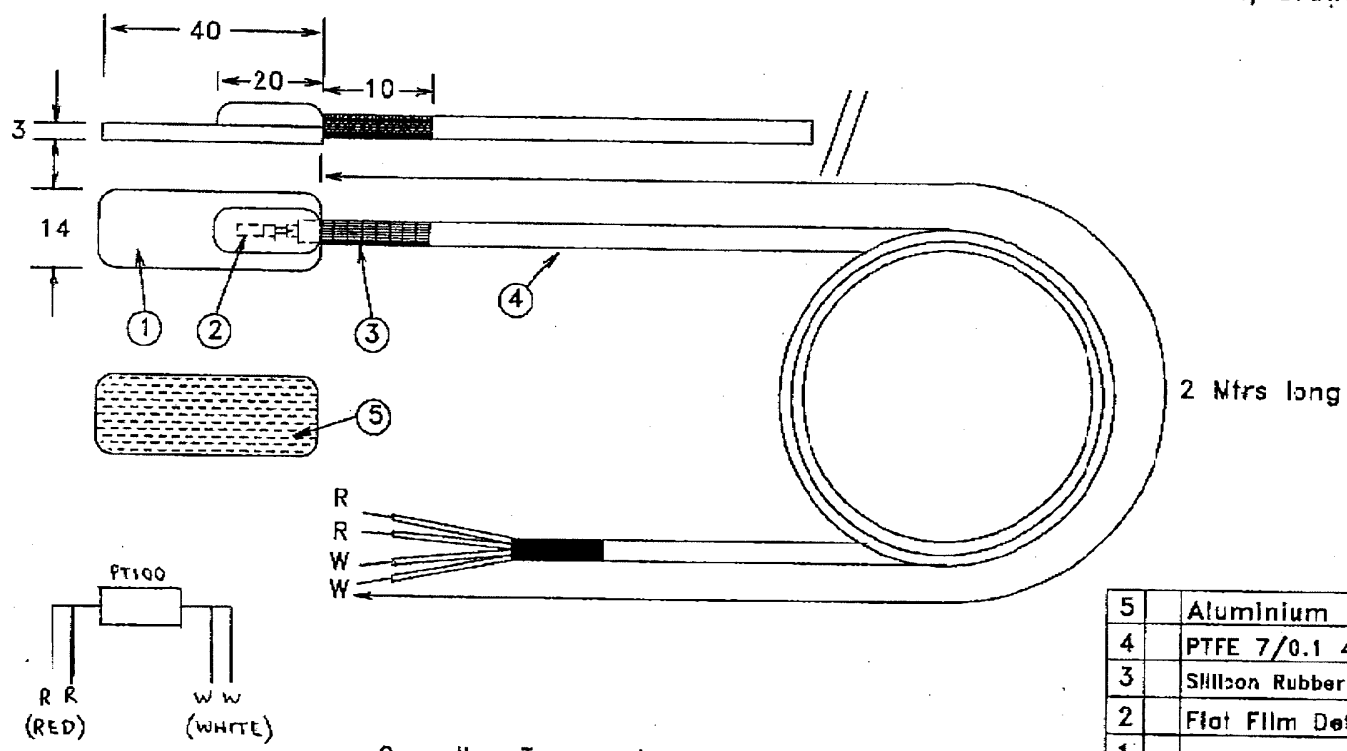

Operating Temperature Range: -50 to 150 °C

5	Aluminium Foil	427
4	PTFE 7/0.1 4 core	
3	Silicon Rubber Sleeve	1242001
2	Flat Film Detector	LAB 5x2
1	Silicon Rubber Patch	

ISSUE	MODIFICATION	APP'D	DATE	UNLESS OTHERWISE STATED DIMENSIONS ARE IN mm.	NAT'L
				SCALE:	FINISH:
				TOLERANCES:	TITLE:
				X +/- 0.4	PT100 Patch Sensor
				X.X +/- 0.2	USED ON: 254-678
				X.XX +/- 0.1	

<p>LABFACILITY TEMPERATURE TECHNOLOGY</p> <p>99 WALDEGRAVE RD. TEDDINGTON, MIDDLESEX, TW11 6LR. Tel: 0181 943 5331</p>	DRAWN	DATE	CHECKED
	GW	05/97	NAH
	DRAWING No. 01-424-RT		
ISSUE			A

THIS DRAWING IS THE PROPERTY OF LABFACILITY Ltd AND SHALL NOT BE COPIED OR USED, EITHER IN WHOLE OR PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF LABFACILITY LTD.