


DRAWING #: PD5005-7TC	AS PART OF THE COMPANY POLICY OF CONTINUED PRODUCT IMPROVEMENT, SPECIFICATIONS MAY CHANGE WITHOUT NOTICE.	REV.	DATE	REVISION DESCRIPTION	DR.
		---	07/29/08	ORIGINAL - SEE ECN 2008-158	L.G.
ENVIRONMENTALLY FRIENDLY MOTION SENSOR, CONTAINS NO HAZARDOUS MATERIAL. ROHS COMPLIANT					

NOTES:

1. ELECTRICAL:
 - 1.1 HIGH COMMUTATION TRIAC 0.1 TO 2.5 A CONTINUALLY, AT 23° C AMBIENT.
 - 1.2 LOAD VOLTAGE RANGE 24 TO 280 VAC.
2. OPERATE:
 - 2.1 DIFFERENTIAL ANGLE MAXIMUM 15°.
 - 2.2 OPERATION TEMPERATURE -25° C TO 70° C.
3. EXTERNAL FINISH:
 - 3.1 ABS PLASTIC CASE.
 - 3.2 WIRE #18 AWG STRANDED COPPER, BLACK NEOPRENE INSULATION.

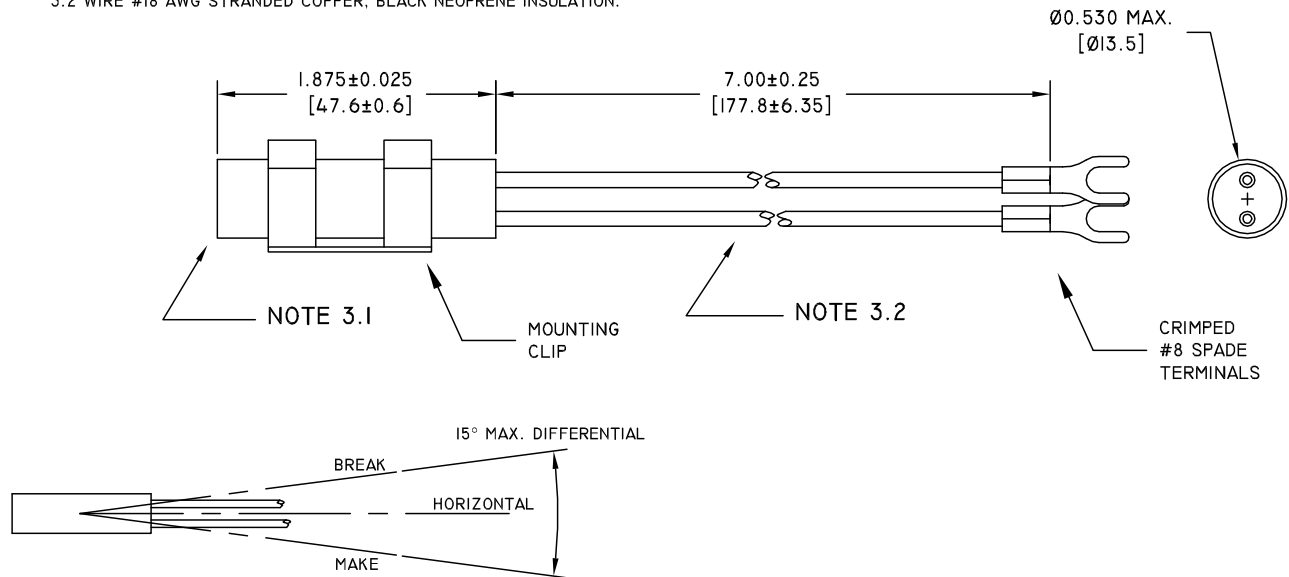

ENGINEERING			COMUS INTERNATIONAL				
			454 ALLWOOD ROAD, CLIFTON, NEW JERSEY 07012		TEL. (973) 777-6900		
QUALITY			UNSPECIFIED TOLERANCES	REF.:	SCALE: NONE	DRAWN BY: L.G.	DATE: 07/29/2008
PRODUCTION			DECIMAL: .XX ±.01 [.254]	TITLE: HYBRID ENCAPSULATED TILT SWITCH			
APPROVAL	SIGNATURE	DATE	.XXX ±.005 [.127]				
			FRACTIONAL: ± 1/64 [.397]	TYPE: SALE		DRAWING #: PD5005-7TC	
			ANGULAR: ± 1/2°				