


SPECIFICATION

1. Rated Voltage12V
2. Operating Voltage6~18V
3. Max. Rated Current40mA
4. Coil Resistance115±12 Ω
5. Coil Impedance.....200 Ω
6. Min. Sound Pressure Level85dB/10cm
7. Resonant Frequency.....2048Hz
8. Case MaterialMPPO
9. Operating Temperature-30~+80°C
10. Store Temperature-40~+85°C
11. Weight7g

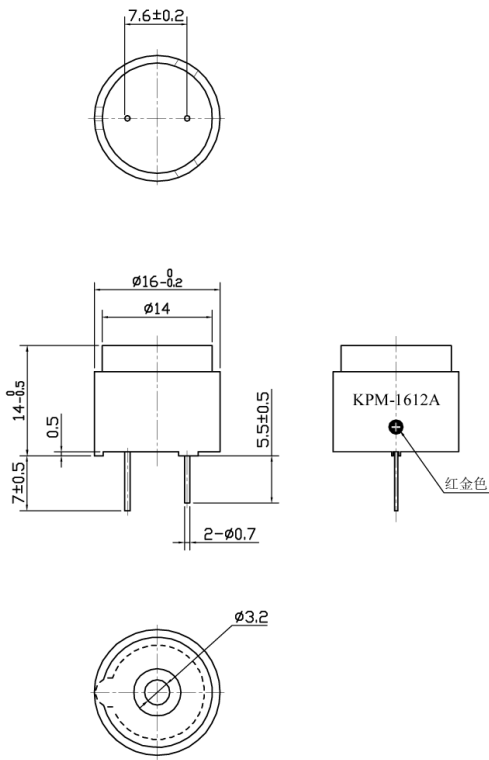

		KEPO KEPO ELECTRONIC CO., LTD. http://www.kepo.com.tw	
Magnetic Buzzer			
KPM-1612A			
No.	DESCRIPTION	APPROVED	DATE
TEL: 886-2-2711-1111 FAX: 886-2-2711-1111 WWW: WWW.KEPO.COM.TW E-MAIL: SALES@KEPO.COM.TW		APPROVALS	DATE
FIRST CHECK PRODUCTION		DRAWN	UNIT
☞ ⊕		CHECKED	DWG NO.
APPROVED		05.05.11	mm KP3.840.685
		SCALE	SHEET
		NOT TO SCALE	1.2