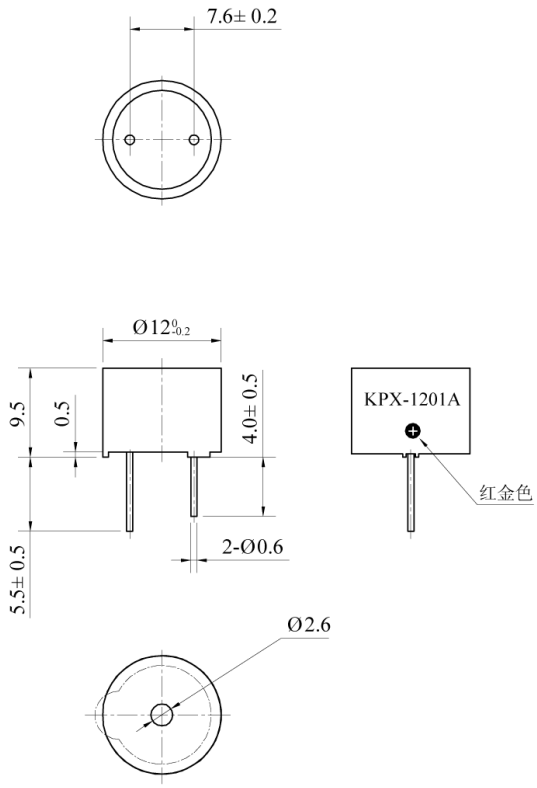

SPECIFICATION

1.Rated Voltage ..... 1.5 VDC
2.Operating Voltage ..... 1~2 VDC
3.Max.Rated Current 20mA/1.5VDC
4.Min.Sound Pressure Level 75dB/10cm
5.Resonant Frequency ..... 2300Hz±300
6.Response Time 50ms
6.Case Material ..... PBT
7.Operating Temperature ..... -20～+70℃
8.Store Temperature ..... -30～+80℃
9.Weight 2g

No.	DESCRIPTION	APPROVED	DATE

TOLERANCES UNLESS NOTED OTHERWISE
.X ±
.XX ±
.XXX ±
90° FORMED ±2° ANGLES ±1°

FIRST ANGLE PROJECTION

APPROVALS	DATE
DRAWN	
CHECKED	
APPROVED	05.02.26

KEPO ELECTRONIC CO., LTD.
http://www.kepo.com.tw

Magnetic Buzzer
KPX-1201A

UNIT mm | DWG NO. KP3.840.686
SCALE NOT TO SCALE | SHEET | VER 1.1

Downloaded from Elcodis.com electronic components distributor