

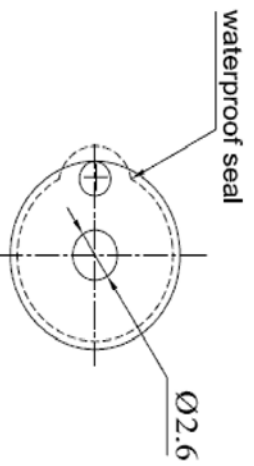



REVISONS		DOC. NO.	SPC-F005	* Effective:	7/8/02	* DCP No:	1398	
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
2070	A	Released	JYC	3/2/2010	JYC	3/2/2010	JYC	3/2/2010

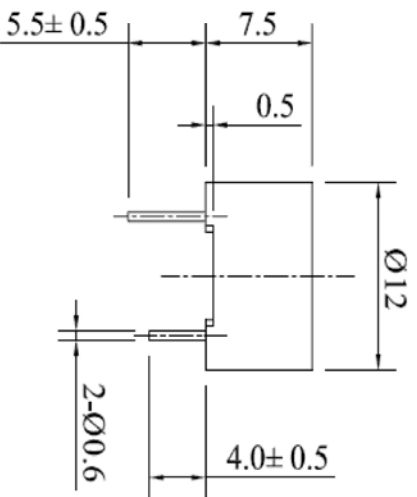

## Specification

1. Rated Voltage: 1.5VDC
2. Operating Voltage: 1~2VDC
3. Max. Rated Current: 30mA/1.5VDC
4. Min. Sound Pressure Level: 75dB/10cm
5. Resonant Frequency: 2300±500HZ
6. Response Time: 50ms
7. Case Material/Color: PBT/Black
8. Operating Temperature: -20~+70°C
9. Store Temperature: -30~+80°C
10. Weight: 2g



**DISCLAIMER:**  
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

**TOLERANCES:**  
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

<b>DRAWN BY:</b>	Jerrald Chen	<b>DATE:</b>	3/2/2010
<b>CHECKED BY:</b>	Jerrald Chen	<b>DATE:</b>	3/2/2010
<b>APPROVED BY:</b>	Jerrald Chen	<b>DATE:</b>	3/2/2010

<b>DRAWING TITLE:</b>		<b>Magnetic Buzzer</b>	
<b>SIZE</b>	<b>DWG. NO.</b>	<b>ELECTRONIC FILE</b>	<b>REV</b>
A	MCKPX-G1201UB-K4064	25R0862.dwg	A
<b>SCALE:</b>	<b>NTS</b>	<b>U.D.M:</b>	<b>mm</b>
		<b>SHEET:</b>	1 OF 1