


1 2 3 4 5 6 7 8

A




B


SPECIFICATION

- 1. Rated Voltage 3VDC
- 2. Operating Voltage 2~5VDC
- 3. Max. Rated Current 30mA/3VDC
- 4. Min. Sound Pressure Level 85dB/10cm
- 5. Resonant Frequency 3100±500Hz
- 6. Response Time 50ms
- 7. Case Material PBT
- 8. Operating Temperature -20~+70°C
- 9. Store Temperature -30~+80°C
- 10. Weight 2g


C

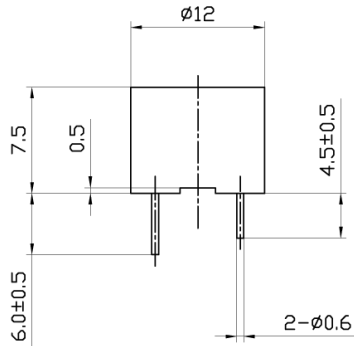

D



E



F

1 2 3 4 5 6 7 8

				KEPO KEPO ELECTRONIC CO., LTD. http://www.kepo.com.tw	
				Magnetic Buzzer	
				KPX-1203B	
No.	DESCRIPTION	APPROVED	DATE		
<small> * DIMENSIONS UNLESS NOTED OTHERWISE * UNLESS OTHERWISE SPECIFIED * FIRST ANGLE PROJECTION </small>		APPROVALS		DATE	
		DRAWN		UNIT	DWG NO.
		CHECKED		mm	KP3.840.691
		APPROVED	05.02.28	SCALE	NOT TO SCALE
				SHEET	VER 1.2

A

B

C

D

E

F