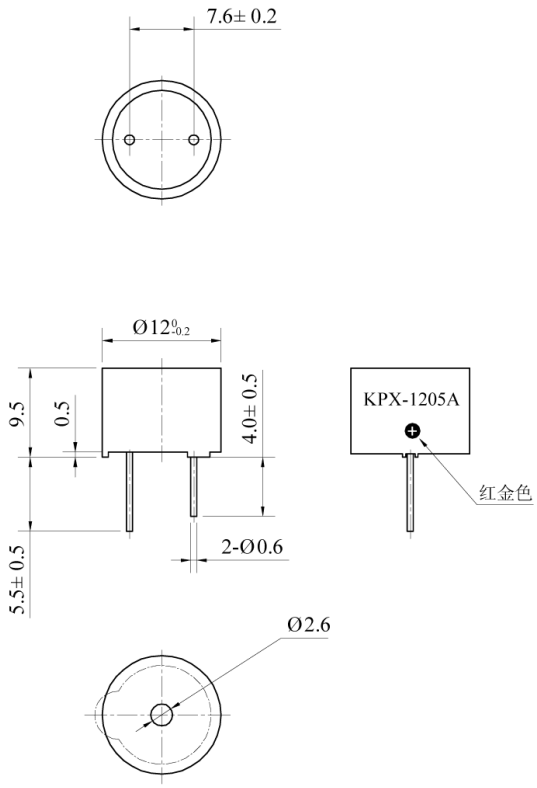

SPECIFICATION

1.Rated Voltage ..... 5 VDC
2.Operating Voltage ..... 4~8 VDC
3.Max.Rated Current 30mA/5VDC
4.Min.Sound Pressure Level 85dB/10cm
5.Resonant Frequency ..... 2300±300Hz
6.Response Time 50ms
6.Case Material ..... PBT
7.Operating Temperature ..... -20～+70℃
8.Store Temperature ..... -30～+80℃
9.Weight 2g

No.	DESCRIPTION	APPROVED	DATE

TOLERANCES UNLESS NOTED OTHERWISE
X ±
XX ±
XXX ±
90° FORMED ±2°
ANGLES ±1°

FIRST ANGLE PROJECTION

APPROVALS		DATE
DRAWN		
CHECKED		
APPROVED		04.12.31

KEPO ELECTRONIC CO., LTD.
http://www.kepo.com.tw

Magnetic Buzzer
KPX-1205A

UNIT mm | DWG NO. KP3.840.688
SCALE NOT TO SCALE | SHEET | VER 1.1

Downloaded from Elcodis.com electronic components distributor