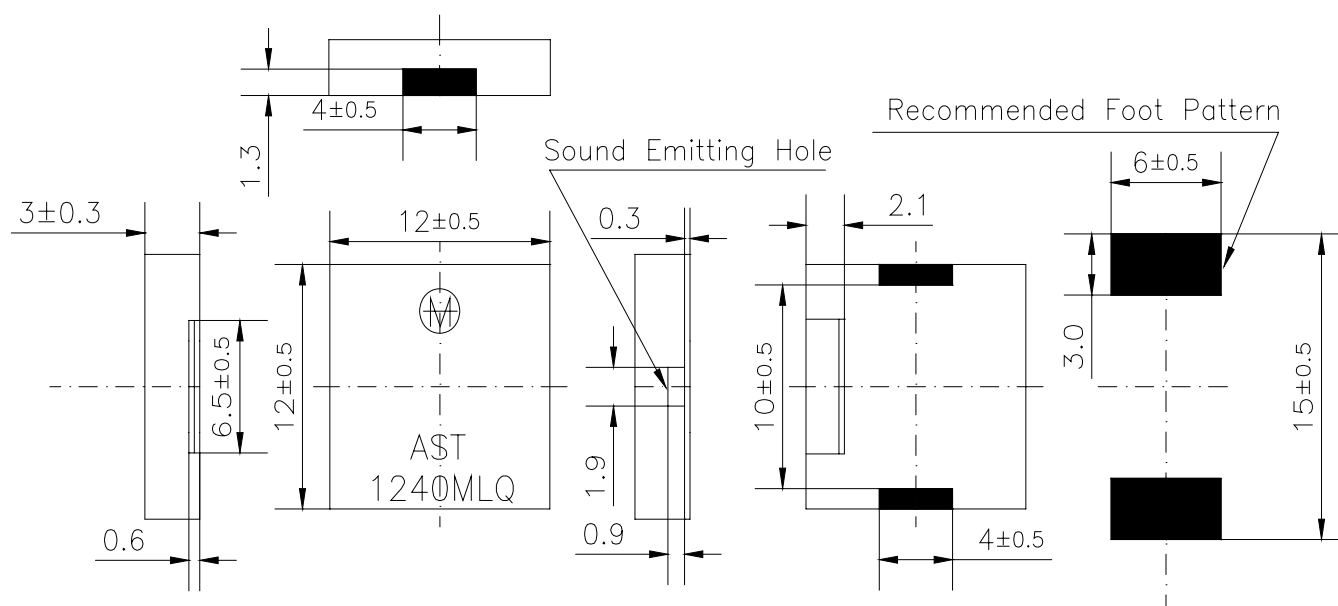


Specifications:

Resonant Frequency (Hz)	4000 \pm 500
Operating Voltage (Vp-p)	25
Rated Voltage (Vp-p)	3
Current Consumption (mA/max)	5 at Rated Voltage
Sound Pressure Level Min. (dB)	75 at 10cm at Rated Voltage
Capacitance (pF)	16,000 \pm 30% at 120 Hz
Operating Temperature (°C)	-20 ~ +70
Storage Temperature (°C)	-30 ~ +80
Housing	LCP Plastic Resin (Color: Black)
Type of Connection Terminals	SMD (Tin Plated Brass)
Weight (Grams)	1
Options	For other options contact factory

PS: Vp-p = 1/2duty, square wave

RoHS Compliant**Dimensions:** (units: mm)**Packaging:**

Parts are supplied in tubes (50 qty per tube)

Units do not come with wash label and are not appropriate for aqueous wash.