


- Signal device for the 22,5 mm control panel programme
- Low current consumption
- High protection rating IP 65

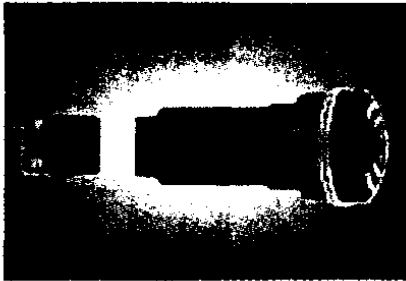

### TECHNICAL SPECIFICATIONS:

|                                |   |
|--------------------------------|---|
| Dimensions (Diameter x Depth): | 28,2 mm x 68,8 mm   |
| Housing:                       | PA-GF, black  |
| Audio frequency:               | c. 2400 Hz  |
| Tone type:                     | Continuous tone or pulse tone with approx. 1 Hz                   |
| Current consumption:           | ≤ 8 mA  |
| Duty cycle:                    | 100 %   |
| Fixing:                        | Installation mounting for ø 22,5 mm (M 22)                        |
| Connection:                    | Connector plug with screwable connection max. 1,5 mm <sup>2</sup> |
| Life duration:                 | > 5.000 h   |

### ORDER SPECIFICATIONS:

|                 |            |            |            |
|-----------------|------------|------------|------------|
| Voltage         | 24 V ≐     | 115 V ≐    | 230 V ~    |
| Continuous tone | 107 000 75 | 107 000 77 | 107 000 68 |
| Pulse tone      | 107 010 75 | 107 010 77 | 107 010 68 |

### TECHNICAL DIAGRAMS

see page 108



## 107 Electronic Installation Buzzer

