Series 14 22.5mm 30.5mm IP67 5A 250VAC











Choose one component from each of the coloured sections to assemble a complete switch. For other options or further information please contact your local sales office.

Product Profile

The Series 14 is a high quality switch range that includes pushbuttons, indicators, mushroom headed switches, selector switches and 2 position key switches.

Options include self cleaning, snapaction or low level switching elements.

- IP67 Protection
- Switch Rating: Maximum Voltage, 250VAC Maximum Thermal Current, Ith = 5A 24VDC/2A, 250VAC/2A
- Raised Mounting into 22.5mm cut out
- Flush Mounting into 30.5mm cut out
- Illumination using T5.5 Lamps or LED's
- All standard lenses are transparent with translucent diffuser
- Solder, plug-in or PCB connections





Indicator body round for raised full face, black plastic, 22.5mm mounting



Indicator body for raised and flush mount, black plastic

Part No.	Part No.
14-030.005	14-040.005
	For flush mount order bezel 704.955.1

For complete switch also order \Box



For complete switch also order 🏺 🗛





Illuminated pushbutton **Keylock switch** Illuminated pushbutton actuator for raised and Illuminated pushbutton actuator for raised and Keylock switch, flush mount, black plastic, solder terminal, flush mount, black plastic, plug-in terminal, 2 position, raised snap-action snap-action Part No. Momentary/Maintained Contact type Part No. Momentary/Maintained Contact type **Drawing** Part No. Momentary/Maintained 14-131.0252 Momentary 1NO/1NC 14-131.022 Momentary 1NO/1NC 14-141.025K2 Momentary 14-132.0252 Momentary 2NO/2NC 14-271.022 Maintained 1NO/1NC 2 14-235.025K2 Maintained 1NO/1NC 14-271.0252 Maintained

For complete switch also order \Box



For flush mount order bezel 704.955.1

Maintained

2NO/2NC

For complete switch also order \Box



For flush mount order bezel 704.955.1

For complete switch also order A



For flush mount order bezel 704.955.1


14-272.0252

Choose one component from each of the coloured sections to assemble a complete switch. For other options or further information please contact your local sales office.







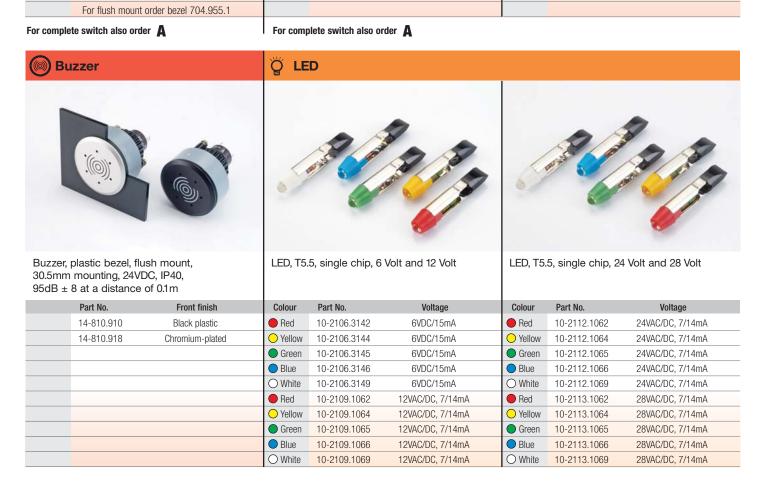













Choose one component from each of the coloured sections to assemble a complete switch. For other options or further information please contact your local sales office.



LED, T5.5, single chip, 48 Volt









Lens cap, round, transparent, plastic for raised and flush indicators with bezel and pushbutton actuators

Colour	Part No.	Voltage	Colour	Part No.	Colour	Part No.
Red	10-2119.1042	48VAC/DC, 4/8mA	Red	704.603.2	Red	704.602.2
O Yellow	10-2119.1044	48VAC/DC, 4/8mA	O Yellow	704.603.4	O Yellow	704.602.4
Green	10-2119.1045	48VAC/DC, 4/8mA	Green	704.603.5	Green	704.602.5
Blue	10-2119.1046	48VAC/DC, 4/8mA	Blue	704.603.6	Blue	704.602.6
O White	10-2119.1049	48VAC/DC, 4/8mA	O Clear	704.603.7	O Clear	704.602.7
					Black	704.602.0
			For comple	ete lens also order diffuser 704.608.9	For comple	ete lens also order diffuser 704.609.9

A Accessories



Aluminium raised bezel, grey plastic raised bezel and flush mount aluminium bezel



Protective cover, raised pushbutton



Protective front ring with silicon membrane for raised or flush mount pushbutton


Image	Part No.	Product description	Part No.		Part No.	Size
1	704.600.1	Aluminium raised bezel	704.925.0		704.600.3	29mm diameter for raised pushbutton
2	704.600.6	Grey plastic bezel			704.955.3	35mm diameter for flush mount pushbutton
3	704.955.1	Flush mount aluminium bezel				

Series 14 22.5mm 30.5mm IP67 5A 250VAC

Choose one component from each of the coloured sections to assemble a complete switch.









i ait ivo.	Woulding Hole	iiiaye	i ait ivo.	i ioduot description	iiiage	i ait ivo.	i roduct description
704.960.7	22.5mm Ø	1	51-996	LED remover	1	704.608.9	Diffuser full face
704.964.8	30.5mm Ø	2	700.006.0	Lens remover	2	704.609.9	Diffuser
					3	704.962.0	Legend plate
					•		

