


**Photoelectric Sensor
BGL 120A-003-S 49
Sn=mm
Laser Fork-thru-beam**

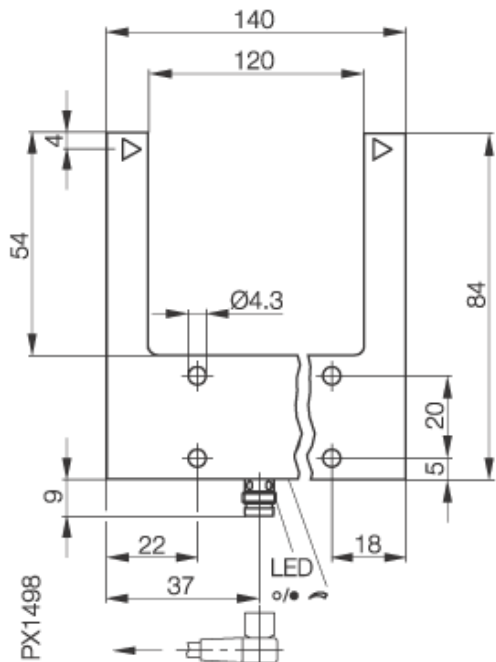

Common Data

Sensortype	Laser Fork-thru-beam
Switching frequency	3000 Hz
Repeat accuracy	0,015mm
Hysteresis	=0,01mm
Indication	Switching element on
Ambient temperature	yes, red LED
Off-delay	-10...+60°C
Light	80µs
Sensitivity Adjustment	Red light, 650nm
Permissable ambient light	Poti 270°
Output function	10000 Lux
Slot spacing	light-on or dark-on
Resolution	120
	0,3


Mechanical Data

Measurements	140x84x10
Housing material	anodized aluminium
Material of sensing face	Glass
Degree of protection	IP65
Connection	Connector S49 (M8 3-pin)
Weigth	116g
Recommended connector	BKS-S 48/BKS-S 49

Electrical Data

Current	DC
Switching function	NC/NO switchable
Output	PNP
Rated operational voltage Ue	24V DC
Rated operational current Ie	200mA
Supply Voltage	10...30V DC
Frequency of Supply Voltage	DC
No-load supply current	<35mA
Voltage drop	<3V
Short protection	yes
Protected against polarity reversal	yes

PNP



Utilization categories
Insulation class

DC 13

Datasheet number:

Definitions see general catalog.
If not otherwise noted, ratings according to
IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH
P.O.Box 1160
73761 Neuhausen Germany
Phone (07158) 173-0 Fax (07158) 5010

Datenblatt by CD-ROM - 10/2004

