


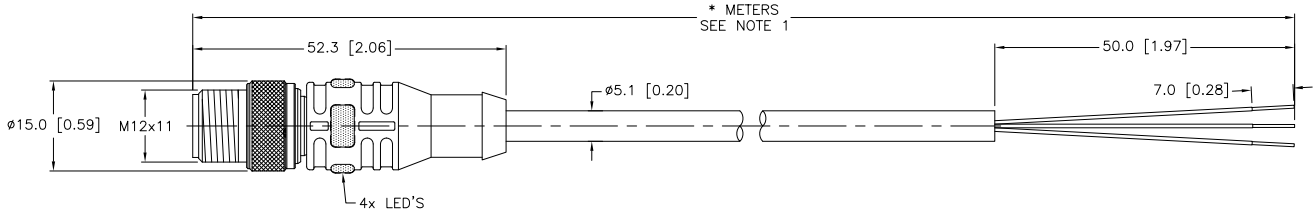


MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS																						
 <p>1 = BROWN 2 = N/C 3 = BLUE 4 = BLACK</p> 	 <p>1 = VOLTAGE (+) (GREEN) 2 = N/C 3 = COMMON (-) 4 = OUTPUT (YELLOW)</p>	<table border="1" style="width:100%; border-collapse: collapse;"> <tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr> <tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>ELASTOLLAN 1195A/CLEAR</td></tr> <tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr> <tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr> <tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr> <tr><td>RATED VOLTAGE [V]</td><td>10-30 VDC</td></tr> <tr><td>OUTER CABLE JACKET MATERIAL/COLOR</td><td>PVC/GRAY</td></tr> <tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr> <tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>3x20 AWG</td></tr> <tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr> <tr><td>PROTECTION CLASS</td><td>NEMA 1,3,4,6P AND IEC IP68, IP69K</td></tr> </table>	CONTACT CARRIER MATERIAL	NYLON OR TPU	MOLDED HEAD MATERIAL/COLOR	ELASTOLLAN 1195A/CLEAR	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	10-30 VDC	OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	3x20 AWG	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K
CONTACT CARRIER MATERIAL	NYLON OR TPU																							
MOLDED HEAD MATERIAL/COLOR	ELASTOLLAN 1195A/CLEAR																							
CONTACT MATERIAL/PLATING	BRASS/GOLD																							
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																							
RATED CURRENT [A]	4.0 A																							
RATED VOLTAGE [V]	10-30 VDC																							
OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY																							
CONDUCTOR INSULATION MATERIAL	PVC																							
NUMBER OF CONDUCTORS [AWG]	3x20 AWG																							
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																							
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K																							





CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

NOTES:
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

G	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/06/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT JBJ	DATE 03/21/01	DESCRIPTION
SEE SPECIFICATIONS		DGSG	SCALE 1=1.0	RSE 4T-*--P7X2
FINISH	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT		IDENTIFICATION NO.
SEE SPECIFICATIONS		MILLIMETER [INCH]		REV
		DO NOT SCALE THIS DRAWING		G
		FILE: 777000225		SHEET 1 OF 1