


BWL 4040D-R011-S49

Photoelectric Sensors,
Angle Sensors

PNP, NO/NC switchable
distance in x-axis = 40 mm
distance in y-axis = 40 mm

BALLUFF
sensors worldwide

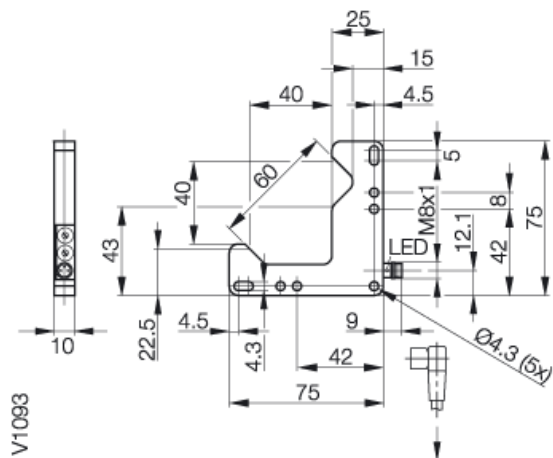

Electrical data:

Load current capacity max. (I _e)	200 mA
Switching output	PNP
Operating frequency (f)	1500 Hz
Current Consumption I _o max. (No Load)	35 mA
Supply voltage min.	10 V
Supply voltage max.	30 V
Voltage ripple max.	10%
Voltage drop U _d max. at I _e	3 V

Mechanical data:

Ambient temperature max.	+60 °C
Ambient temperature min.	-10 °C
weight	51 g
Sensing face material	Glass
Housing material	Aluminium anodized
distance in x-axis	40 mm
distance in y-axis	40 mm

Optical data:

Emitter type	Visible Red
Wavelength of emitted light	640 nm
permissible ambient light	EN 60947-5-2

General data:

Function indication	yes, red LED
Degree of protection IP	IP 67
Insulation class	2
Protected against polarity reversal	yes
Approval	CE
Type	Angular light barrier

wiring



Pinout



www.balluff.com

Balluff Europe: +49 7158 173 -0
Balluff USA: 1-800-54 3-83 90
Balluff Asia: +86 21-50 64 41 31

Online Productinformation
2008-01-03