

## FLOW SWITCH

### FS Series - Flow Switch in Copper

## FS-10

#### Design Features

- 15mm copper pipe
- Minimal pressure drop
- Operates from a small head of water
- Vertical mount +/- 15°
- Suitable for water and air flow switching



#### Product Comments

- 15mm copper pipe
- Suitable for hot and cold portable water
- Reed Switch reliability
- Meets UL 94-HB flammability rating
- Easy installation

#### Typical Applications


- Mains water control
- Power Shower
- Central Heating Systems
- Leak Detection
- Cooling systems

#### Material, Design and Operation

Mounting:	Flow Switch Vertical
Material:	Copper
Fitting	Flow Switch 15mm pipe size
Contact Form:	Form A -SPST
Contact Material:	Ruthenium
Maximum Watts	15 Watts
Maximum Switching Volts:	300 VDC
Maximum Switching Current:	1.0A
Cable Type:	2 x 16/0.2mm PVC insulated 1.0M long
Cable Colour:	Black/Black
Operating Temperature Range:	85 °C
Medium/Liquid:	Water
Flow Rate:	0.5 litres/min
Operating Pressure:	10BAR
Mounting Shock:	50g for 11ms duration
Mounting Vibration:	35g up to 500Hz

## Line Drawing

### FS-10

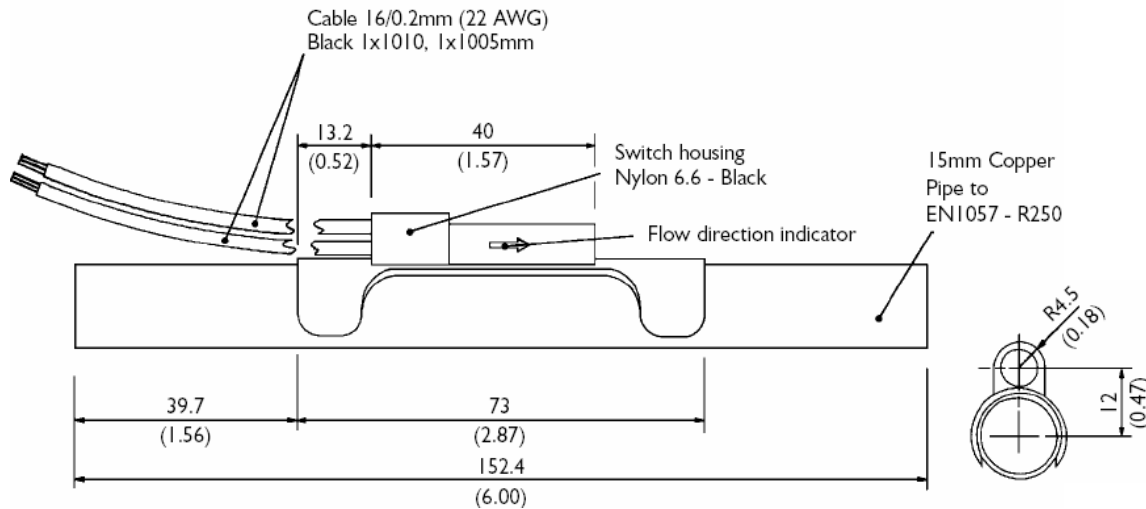

### Installation

- Pipework to be cut square and burr free
- Compression fitting mating connectors to be of suitable quality.
- The installation should be checked to ensure that no leaking is evident.
- Pipework/connector alignment imperative (avoiding bending stress).

### Flow Rate v Pressure Drop

