


DRAWING #: VFS75


REV.	DATE	REVISION DESCRIPTION	DR.
---	05/27/04	ORIGINAL	R.F.

NOTES:

- I. ELECTRICAL
 - I.1 SWITCHING CAPACITY MAX. 60W. SPDT.
 - I.2 SWITCHING VOLTAGE MAX. 220VAC
 - I.3 SWITCHING CURRENT MAX. 2A.
 - I.4 CARRY CURRENT MAX. 3A.
2. OPERATIONAL:
 - 2.1 TOP OR BOTTOM MOUNTING
 - 2.2 OPERATING TEMPERATURE -10°C TO 120°C
 - 2.3 MAX. PRESSURE 30 (KG/CM).
 - 2.4 SUITABLE SPECIFIC GRAVITY OF LIQUID 0.55
3. FINISH:
 - 3.1 STAINLESS STEEL SUS304,316
 - 3.2 LEAD WIRE UL3266, AWG 22

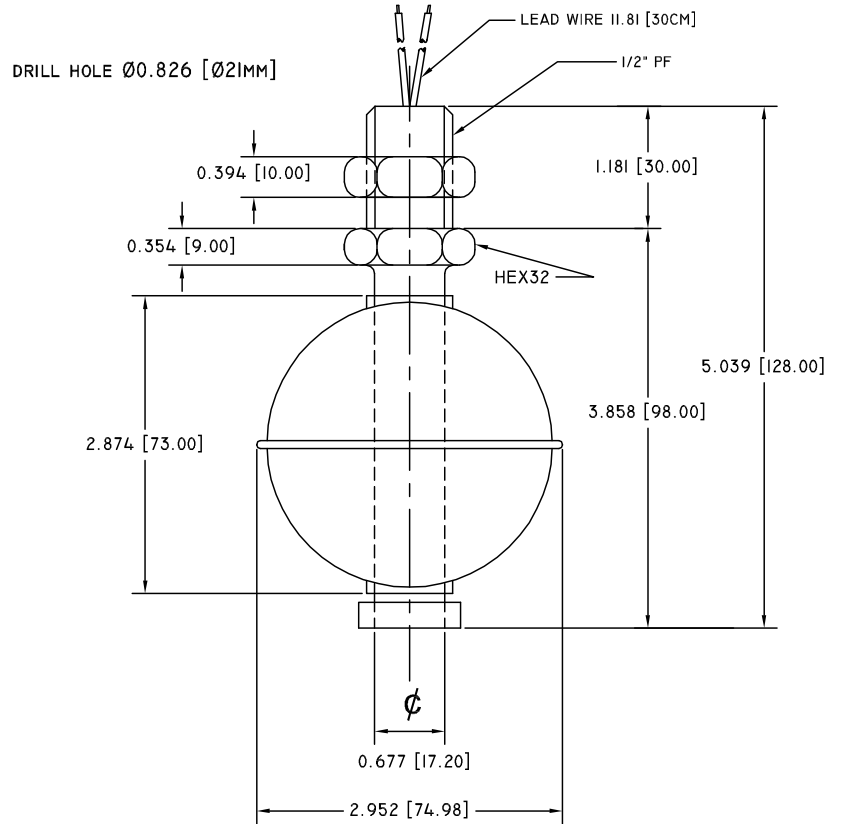

WORKING POSITION

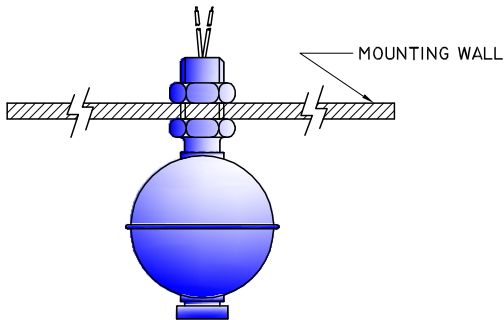

COMUS INTERNATIONAL			
454 ALLWOOD ROAD, CLIFTON, NEW JERSEY 07012		TEL. (973) 777-6900	
ENGINEERING		UNSPECIFIED TOLERANCES	REF.: VFS50
QUALITY		DECIMAL: .XX ±.01 [.254] .XXX ±.005 [.127]	SCALE: 3:2
PRODUCTION		FRACTIONAL: ± 1/64 [.397]	DRAWN BY: R. F.
APPROVAL	SIGNATURE	ANGULAR: ± 1/2°	DATE: 05/27/2004
		TITLE: FLOAT SWITCH	
		TYPE: SALES	DRAWING #: VFS75